





Features


- 2-port USB3.2 Type-A, up to 10Gbps
- Flexible supports M.2 Key B, Key M
- PCI Express x2 Interface



Specifications

USB	
Form Factor	M.2 3042 Key B-M
Input Interface	PCIe x2
Output Port	2
Output Connector	USB Type-A
Data Rate	Up to 10Gbps
Power	Support 2.5W each port (Maximum: support 5W each port by additional power input)
Software Support	
OS	Windows 10, Windows 11, Linux
Mechanical	
Dimensions (W x L)	 M.2 Card: 30mm x 42mm (1.18'' x 1.65'') Daughter Card: 58mm x 41.5mm (2.28'' x 1.63'')
Cable Length	30cm

Environment	
Operating Temperature	-40°C to 70°C (-40°F to 158°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @ 70°C
EMC	CE, FCC
Packing List	
1 UMT-100 (M.2 + Daughter Card) 1 Cable 1 PCle Bracket	

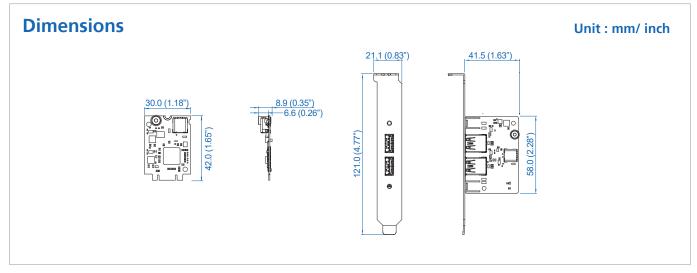

Order Information

UMT-100

2 Port USB3.2 M.2 Card

