

CE EMC Test Report (EN 50155 & EN 50121-3-2)

Report No.: CE190218C25-1

Test Model: RCX-1422R

Series Model: RCX-1XXXXXXXXXXXXXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)

Received Date: Feb. 18, 2019

Test Date: Mar. 26, 2019 ~ Apr. 12, 2019

Issued Date: Apr. 18, 2019

Applicant: Vecow Co., Ltd.

Address: 12F, No.111, Zhongcheng Rd., Tucheng Dist., New Taipei City 236, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Performance Criteria	8
2.2 Measurement Uncertainty	8
2.3 Modification Record.....	8
3 General Information	9
3.1 Description of EUT	9
3.2 Operating Modes of EUT and Determination of Worst Case Operating Mode	9
3.3 Test Program Used and Operation Descriptions.....	10
3.4 Primary Clock Frequencies of Internal Source.....	10
3.5 Miscellaneous.....	11
4 Configuration and Connections with EUT	12
4.1 Connection Diagram of EUT and Peripheral Devices	12
4.2 Configuration of Peripheral Devices and Cable Connections	13
5 Conducted Disturbance at Auxiliary a.c. or d.c. Power Ports	15
5.1 Limits	15
5.2 Test Instruments	15
5.3 Test Arrangement	16
5.4 Test Results	17
6 Radiated Disturbance up to 1 GHz	19
6.1 Limits	19
6.2 Test Instruments	19
6.3 Test Arrangement	20
6.4 Test Results	21
7 Radiated Disturbance above 1 GHz	23
7.1 Limits	23
7.2 Test Instruments	24
7.3 Test Arrangement	25
7.4 Test Results	26
8 Electrostatic Discharge Immunity Test (ESD)	28
8.1 Test Specification	28
8.2 Test Instruments	28
8.3 Test Arrangement	29
8.4 Test Results	30
9 Radio-frequency Electromagnetic Field Immunity Test (RS)	34
9.1 Test Specification	34
9.2 Test Instruments	34
9.3 Test Arrangement	35
9.4 Test Results	35
10 Electrical Fast Transient/Burst Immunity Test (EFT)	36
10.1 Test Specification	36
10.2 Test Instruments	36
10.3 Test Arrangement	36
10.4 Test Results	37
11 Surge Immunity Test	38

11.1	Test Specification	38
11.2	Test Instruments	38
11.3	Test Arrangement	39
11.4	Test Results	39
12	Immunity to Conducted Disturbances Induced by RF Fields (CS)	40
12.1	Test Specification	40
12.2	Test Instruments	40
12.3	Test Arrangement	41
12.4	Test Results	42
13	Pictures of Test Arrangements	43
13.1	Conducted Disturbance at Auxiliary a.c. or d.c. power ports	43
13.2	Radiated Disturbance up to 1 GHz	44
13.3	Radiated Disturbance above 1 GHz.....	45
13.4	Electrostatic Discharge Immunity Test (ESD)	46
13.5	Radio-frequency Electromagnetic Field Immunity Test (RS)	46
13.6	Fast Transients (EFT).....	48
13.7	Surge	49
13.8	Radio-frequency common mode (CS).....	50
Appendix – Information of the Testing Laboratories		51

Release Control Record

Issue No.	Description	Date Issued
CE190218C25-1	Original Release	Apr. 18, 2019

2 Summary of Test Results

EN 50121-3-2:2016, Emission EN 50155:2007 +AC:2010 +AC:2012, Clause 12.2.8.2			
Port	Test Item / specifications	Result/Remarks	Verdict
Auxiliary a.c. or d.c. power ports - Auxiliary supply sinusoidal a.c. or d.c.	Conducted disturbance 150 kHz- 500 kHz: 99 dB μ V quasi-peak 500 kHz- 30 MHz: 93 dB μ V quasi-peak	Minimum passing margin is -48.60 dB at 2.56425 MHz	Pass
Auxiliary a.c. or d.c. power ports – AC power outlet port for public use	Conducted disturbance 50 Hz- 2 kHz: THD <8% (THD: total harmonic distortion)	Test not applicable because the port does not exist.	N/A
Battery referenced ports - Battery power supply	Conducted disturbance 150 kHz- 500 kHz: 99 dB μ V quasi-peak 500 kHz- 30 MHz: 93 dB μ V quasi-peak	Test not applicable because the port does not exist.	N/A
Enclosure	Radiated disturbance 30 MHz- 230 MHz: 40 dB μ V/m quasi-peak 230 MHz -1 GHz: 47 dB μ V/m quasi-peak	Minimum passing margin is -4.25 dB at 63.18 MHz	Pass
Enclosure	Radiated disturbance 1 GHz- 3 GHz: 76 dB μ V/m peak 56 dB μ V/m average 3 GHz - 6 GHz: 80 dB μ V/m peak 60 dB μ V/m average	Minimum passing margin is -3.03 dB at 1484.99 MHz	Pass

EN 50121-3-2:2016, Immunity requirements, EN 50155:2007 +AC:2010 +AC:2012, Clause 12.2.7 & 12.2.8.1					
Table Clause	Basic standard	Port	Test Item / specifications	Result/Remarks	Verdict
3.1	EN 61000-4-6:2014	Battery referenced ports (except at the output of energy sources), Auxiliary a.c. power input ports (rated voltage \leq 400 Vrms)	Radio-frequency common mode (CS) 80% AM (1kHz) 0.15-80 MHz, 10V Performance Criterion A	Performance Criterion A	Pass
3.2	EN 61000-4-4:2012	Battery referenced ports (except at the output of energy sources), Auxiliary a.c. power input ports (rated voltage \leq 400 Vrms)	Fast Transients (EFT) 5/50 (T _r /T _h) ns, 5kHz \pm 2kV Performance Criterion A	Performance Criterion A	Pass
3.3	EN 61000-4-5:2014	Battery referenced ports (except at the output of energy sources), Auxiliary a.c. power input ports (rated voltage \leq 400 Vrms)	Surges 1.2/50 (8/20) (T _r /T _h) μ s Line to ground: \pm 2kV 42 Ω , 0.5 μ F Line to line: \pm 1kV 42 Ω , 0.5 μ F Performance Criterion B	Performance Criterion A	Pass

EN 50121-3-2:2016, Immunity requirements,
EN 50155:2007 +AC:2010 +AC:2012, Clause 12.2.7 & 12.2.8.1

Table Clause	Basic standard	Port	Test Item / specifications	Result/Remarks	Verdict
4.1	EN 61000-4-6:2014	Signal & communication, process measurement & control ports	Radio-frequency common mode (CS) 80 AM (1kHz) 0.15-80 MHz, 10V	Performance Criterion A	Pass
4.2	EN 61000-4-4:2012	Signal & communication, process measurement & control ports	Fast Transients (EFT) 5/50 (T _r /T _n) ns, 5kHz ±2kV, Capacitive clamp Performance Criterion A	Performance Criterion A	Pass
5.1	EN 61000-4-3:2006 +A1:2008 +A2:2010	Enclosure ports	Radio-frequency electromagnetic field amplitude modulated (RS) ¹ , 80% AM (1kHz) 80-800 MHz, 20V/m Performance Criterion A	Performance Criterion A	Pass
5.2	EN 61000-4-3:2006 +A1:2008 +A2:2010	Enclosure ports	Radio-frequency electromagnetic field from digital mobile telephones (RS) ² , 80% AM (1kHz) 800-1000 MHz, 20V/m 1400-2000 MHz, 10V/m 2000-2700 MHz, 5V/m 5100-600 MHz, 3V/m Performance Criterion A	Performance Criterion A	Pass
5.3	EN 61000-4-2:2009	Enclosure ports	Electrostatic Discharges (ESD) ±6kV Contact discharge ±8kV Air discharge Performance Criterion B	Performance Criterion B	Pass

Note 1: This limit applies to equipment mounted in the passenger compartments, drivers cab or external to the rolling stock (roof, underframe). For equipment mounted in all other areas a severity level of 10 V/m may be used.

Note 2: For large apparatus (e.g. traction drives, auxiliary converters) it is often not practical to perform the immunity test to radiated electromagnetic fields on the complete unit. In such cases the manufacturer should test susceptible sub-systems (e.g. control electronics). The test report should justify the selection or not of sub-systems and any assumptions made (e.g. reduction of field due to case shielding).

N/A: Not Applicable

Note:

1. There is no deviation to the applied test methods and requirements covered by the scope of this report.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Performance Criteria

General Performance Criteria

The general performance criteria apply for those ports for which no specific performance criteria are defined (e.g. auxiliary ports) in the report.

Performance criterion A: The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended..

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C: Temporary loss of function is allowed, provided the function is selfrecoverable or can be restored by the operation of the controls.

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Expanded Uncertainty (k=2) (\pm)	Maximum allowable uncertainty (\pm)
Conducted disturbance at mains port using AMN, 150kHz ~ 30MHz	2.44 dB	3.4 dB (U_{cispr})
Radiated disturbance, 30MHz ~ 1GHz	4.29 dB	6.3 dB (U_{cispr})
Radiated disturbance, 1GHz ~ 6GHz	2.26 dB	5.2 dB (U_{cispr})

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 Description of EUT

Product	Expandable Fanless System
Brand	Vecow
Test Model	RCX-1422R
Series Model	RCX-1XXXXXXXXXXXXXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)
Sample Status	Mass product
Operating Software	Windows 10
Power Supply Rating	24 Vdc (Adapter)
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below

Note:

1. All models are listed as below.

Brand	Model	Difference
Vecow	RCX-1422R	All models are electrically identical, different model names are for marketing purpose.
	RCX-1XXXXXXXXXXXXXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)	

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	Meanwell	GST280A24-C6P	I/P: 100-240 Vac, 50/60 Hz, 4.5 A, O/P: 24 Vdc, 11.67 A, 280.08W Max. 1.2 m non-shielded cable with 1 core
CPU	Intel	I7-8700	3.2 GHz
SSD	Innodisk	3MG2-P	64G
DDR4	SLINK	J48GSH1G8QHEI	8GB

3.2 Operating Modes of EUT and Determination of Worst Case Operating Mode

Test modes are presented in the report as below.

Mode	Test Condition
	Conducted Emission
1	L LAN Link + DIO 1&2 Cable + USB with M/S + USB with K/B + USB with HDD*4 + RS232 Loop + Mic&Earphone + DP with Monitor*2 + DVI-I with Monitor + IGN Cable + Adapter
	Radiated Emission
1	LAN Link + DIO 1&2 Cable + USB with M/S + USB with K/B + USB with HDD*4 + RS232 Loop + Mic&Earphone + DP with Monitor*2 + DVI-I with Monitor + Adapter

Mode	Test Condition
	ESD, RS, Surge tests
1	LAN Link + DIO 1&2 Cable + USB with M/S + USB with K/B + USB with Flash*4 + RS232 Loop + Mic&Earphone + DP with Monitor*2 + DVI-I with Monitor + Adapter
	EFT, CS tests
1	LAN Link + DIO 1&2 Cable + USB with M/S + USB with K/B + USB with Flash*4 + RS232 Loop + Mic&Earphone + DP with Monitor*2 + DVI-I with Monitor + Adapter
2	LAN Link + DIO 1&2 Cable + USB with M/S + USB with K/B + USB with Flash*4 + RS232 Loop + Mic&Earphone + DP with Monitor*2 + DVI-I with Monitor + Adapter <Telecommunication Port with LAN Cable>

3.3 Test Program Used and Operation Descriptions

<Emission Tests>

- a. The EUT was charged from adapter.
- b. The EUT linked with Notebooks via LAN cables.
- c. The EUT sent audio signal to the earphone.
- d. The EUT linked with Monitors via DP and DVI cables.
- e. The EUT read and wrote data with HDDs.
- f. The EUT linked with Keyboard and Mouse via USB Cable.
- g. The EUT linked with Terminals, IGN Cables, DIO Cables and GND Cable.
- h. The EUT communicated data with the Notebooks, which acted as communication partners.

<Immunity Tests>

- a. The EUT was charged from adapter.
- b. The EUT linked with Notebooks via LAN cables.
- c. The EUT sent audio signal to the Headset.
- d. The EUT linked with Monitors via DP and DVI cables.
- e. The EUT read and wrote data with Flashes.
- f. The EUT linked with Keyboard and Mouse via USB Cable.
- g. The EUT linked with Terminals, IGN Cables, DIO Cables and GND Cable.
- h. The EUT communicated data with the Notebooks, which acted as communication partners


3.4 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 3700 MHz, provided by {applicant}, for detailed internal source, please refer to the manufacturer's specifications.

3.5 Miscellaneous

➤ Affix CE marking

The marking must be placed visibly and legibly on the product or, if not possible due to the nature of the product, be affixed to the packaging and the accompanying document. The CE marking shall consist of the initials 'CE' taking the following form:

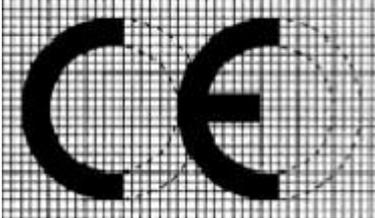

The various components of the CE marking must have the same vertical dimension, and may not be smaller than 5 mm. If the CE marking is reduced or enlarged, the proportions given in the graduated drawing above must be respected.


When the product is subject to other Directives covering other aspects and which also provide for the 'CE' marking, the accompanying documents must indicate that the product also conforms to those other Directives.

However, when one or more of those Directives allow the manufacturer, during a transitional period, to choose which arrangements to apply, the 'CE' marking has to indicate conformity only with the Directives applied by the manufacturer. In this case, the particularities of the Directives applied, as published in the Official Journal of the European Union, must be given in the documents, notices or instructions required by the Directives and accompanying such products.


4 Configuration and Connections with EUT

4.1 Connection Diagram of EUT and Peripheral Devices

Emission tests

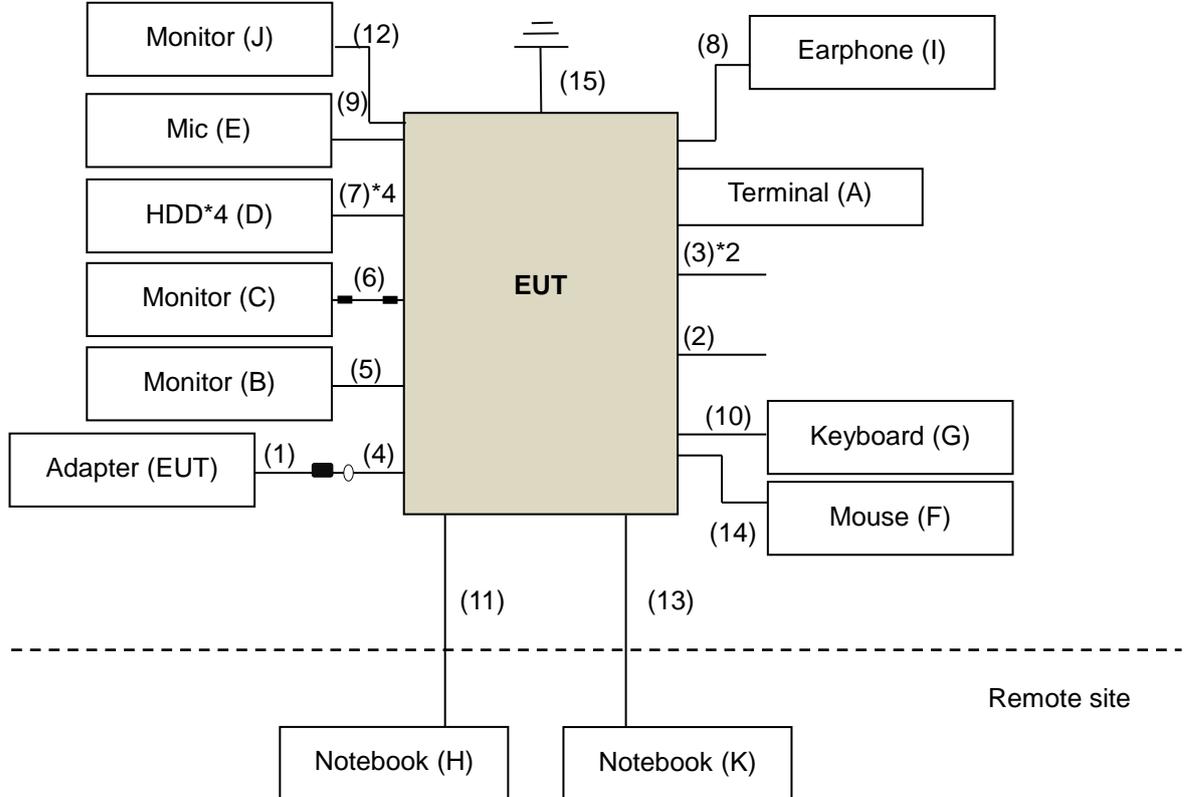

Immunity tests:

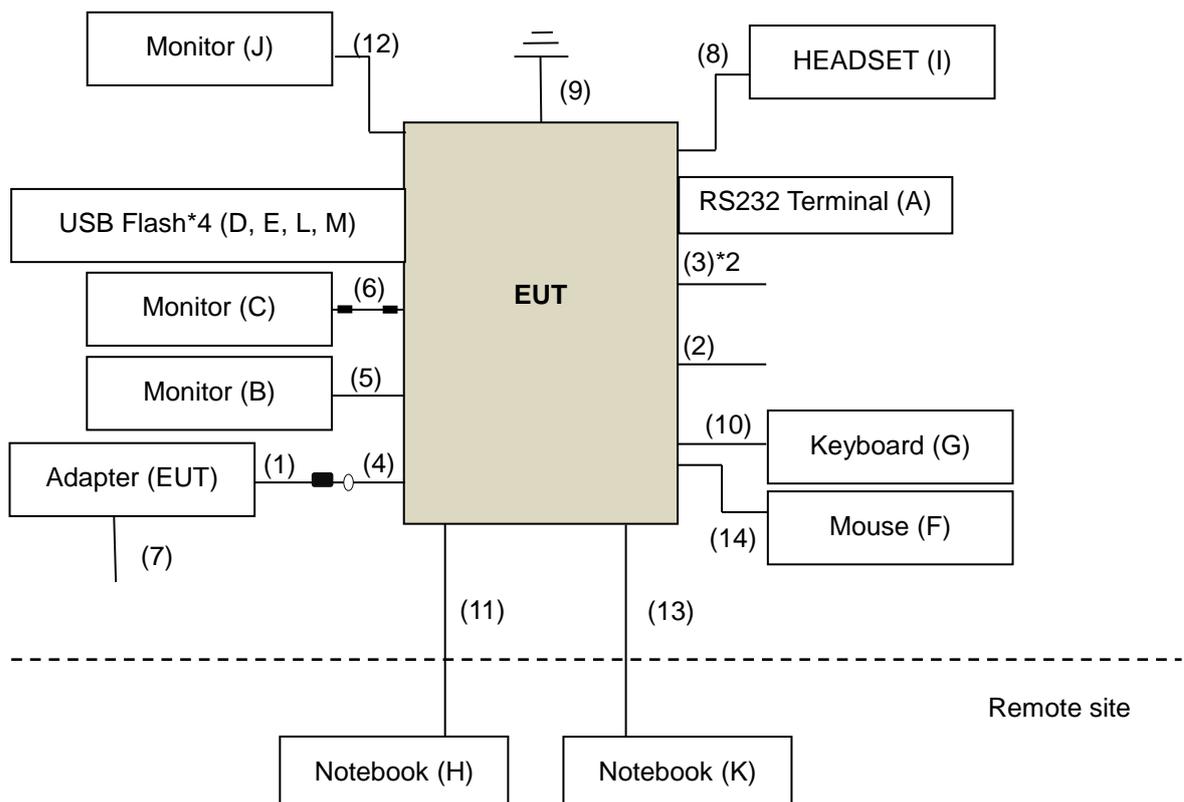

4.2 Configuration of Peripheral Devices and Cable Connections

Emission tests:

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Terminal	N/A	N/A	N/A	N/A	Provided by client
B.	LCD Monitor	DELL	S2817Q	CN-0GD45P-74445-6CD-012M-A01	N/A	--
C.	LCD Monitor	AOC	U2868PQU	HCXE8JA000353	ZU10019-14003	--
D.	HDD*4	Toshiba	DTB305	X4RKCMUNT3ZB	N/A	--
				X4RKCMV0T3ZB	N/A	--
				X4RKCMUMT3ZB	N/A	--
				X4RFCAMDT3ZB	N/A	--
E.	MICROPHONE	Labtec	LVA7313	N/A	N/A	--
F.	USB Mouse	DELL	MOCZUL	CN-049TWY-PRC00-79E-02FY	N/A	--
G.	USB Keyboard	DELL	KB216t	CN-0W33XP-LO300-79R-OUG8-A03	N/A	--
H.	Notebook	DELL	E6440	6QLNM32	N/A	--
I.	Earphone	Acon	CW-010M.V	N/A	N/A	--
J.	LCD Monitor	Dell	S2817Q	CN-0GD45P-74445-6CD-012M-A01	N/A	--
K.	Notebook	DELL	E6440	FMLNM32	N/A	--

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items H \ K acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1	N	1	Accessory of the EUT
2.	IGN Cable	1	1	N	0	Provided by client
3.	DIO Cable	2	0.9	N	0	Provided by client
4.	DC to DC Cable	1	0.1	N	0	--
5.	DP Cable	1	1.8	Y	0	--
6.	DVI Cable	1	1.8	Y	2	--
7.	HDD Cable	4	0.5	Y	0	--
8.	Earphone Cable	1	1.2	Y	0	--
9.	Mic. Cable	1	1.2	Y	0	--
10.	Keyboard Cable	1	1.8	Y	0	--
11.	LAN Cable	1	10	N	0	Cat5e
12.	DP Cable	1	1.8	Y	0	--
13.	LAN Cable	1	10	N	0	Cat5e
14.	Mouse Cable	1	1.8	Y	0	--
15.	GND Cable	1	1.5	N	0	--

Note: The core(s) is(are) originally attached to the cable(s).

Immunity tests:

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	RS232 Terminal	N/A	N/A	N/A	N/A	Provided by client
B.	Monitor	HP	Z23i	3CQ5193V8H	N/A	
C.	LCD Monitor	DELL	2408FPb	CN-0G293H-74261-874-22KS-A00	Doc	--
D.	USB Flash	Transcend	JefFlash 790	N/A	N/A	--
E.	USB Flash	Transcend	JefFlash 790	N/A	N/A	--
F.	USB Mouse	DELL	MS111-P	CN-011D3V-71581-1CJ-093M	FCC DoC Approved	--
G.	USB Keyboard	DELL	KB4021	CN-05V23T-71581-1AK-01RZ-A01	FCC DoC Approved	--
H.	Notebook	DELL	Inspiron 15 3000	JVXSD82	N/A	--
I.	HEADSET	PHILIPS	SHM2100U	01	N/A	--
J.	Monitor	HP	D7Q14A4	CNC437015W	N/A	--
K.	Notebook	DELL	Inspiron 15 3000	JBXSD82	N/A	--
L.	USB Flash	Transcend	JefFlash 790	N/A	N/A	--
M.	USB Flash	Transcend	JefFlash 790	N/A	N/A	--

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items H · K acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1	N	1	Accessory of the EUT
2.	IGN Cable	1	1	N	0	Provided by client
3.	DIO Cable	2	0.9	N	0	Provided by client
4.	DC to DC Cable	1	0.1	N	0	Provided by client
5.	DP Cable	1	1.8	Y	0	--
6.	DVI Cable	1	1.8	Y	2	--
7.	AC Cable	1	1.8	N	0	--
8.	Audio Cable	1	1.8	N	0	--
9.	GND Cable	1	2	N	0	--
10.	Keyboard Cable	1	1.8	Y	0	--
11.	LAN Cable	1	3	N	0	Cat5e
12.	DP Cable	1	1.8	Y	0	--
13.	LAN Cable	1	3	N	0	Cat5e
14.	Mouse Cable	1	1.8	Y	0	--

Note: The core(s) is(are) originally attached to the cable(s).

5 Conducted Disturbance at Auxiliary a.c. or d.c. Power Ports

5.1 Limits

Frequency (MHz)	Quasi-peak, (dBuV)
0.009 - 0.15	no limits
0.15 - 0.5	99
0.5 - 30	93

Notes: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102412	Feb. 14, 2019	Feb. 13, 2020
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 05, 2018	Sep. 04, 2019
AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 30, 2019	Jan. 29, 2020
AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 13, 2018	Aug. 12, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

5.3 Test Arrangement

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

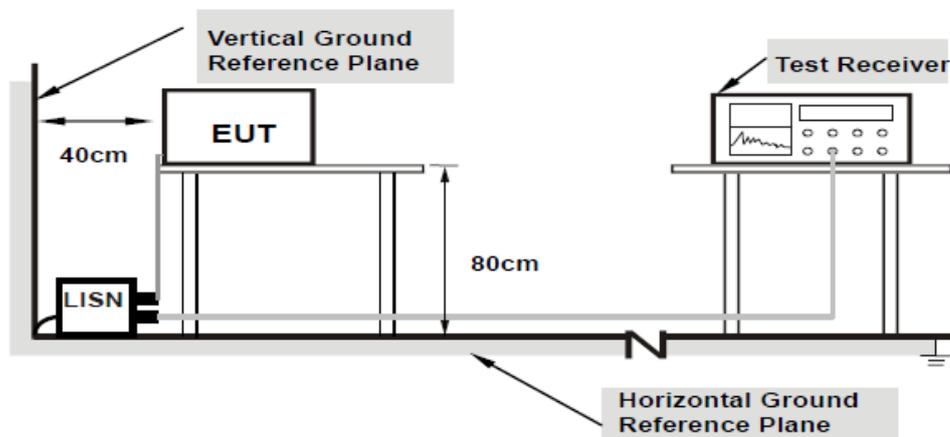

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


5.4 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	230Vac, 50Hz	Environmental Conditions	24°C, 72%RH
Tested by	Jim Lee	Test Date	2019/4/11
Test Mode	Mode 1		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.70125	10.08	29.82	27.30	39.90	37.38	93.00	N/A	-53.10	N/A
2	1.17150	10.08	28.88	28.49	38.96	38.57	93.00	N/A	-54.04	N/A
3	2.56425	10.11	34.29	34.03	44.40	44.14	93.00	N/A	-48.60	N/A
4	3.09975	10.12	25.47	16.09	35.59	26.21	93.00	N/A	-57.41	N/A
5	10.26150	10.28	31.06	27.98	41.34	38.26	93.00	N/A	-51.66	N/A
6	16.48725	10.44	27.19	19.10	37.63	29.54	93.00	N/A	-55.37	N/A

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

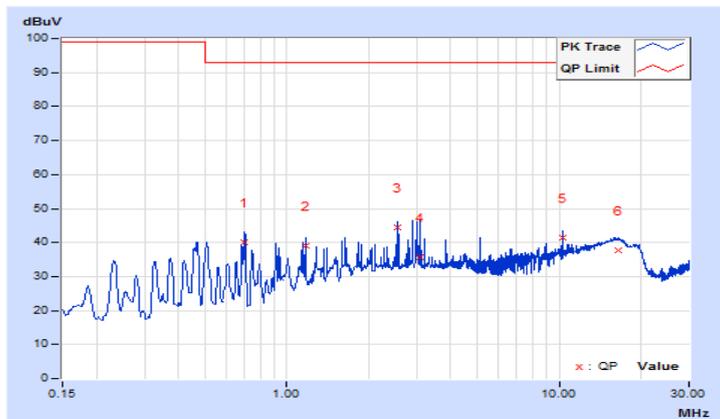


Frequency Range	150kHz ~ 30MHz	Detector Function & Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	230Vac, 50Hz	Environmental Conditions	24°C, 72%RH
Tested by	Jim Lee	Test Date	2019/4/11
Test Mode	Mode 1		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.70125	10.14	29.57	27.63	39.71	37.77	93.00	N/A	-53.29	N/A
2	1.14000	10.14	27.90	27.10	38.04	37.24	93.00	N/A	-54.96	N/A
3	1.63950	10.15	28.13	26.68	38.28	36.83	93.00	N/A	-54.72	N/A
4	2.56650	10.17	32.17	31.85	42.34	42.02	93.00	N/A	-50.66	N/A
5	5.13375	10.25	27.36	26.72	37.61	36.97	93.00	N/A	-55.39	N/A
6	10.26375	10.40	28.25	22.68	38.65	33.08	93.00	N/A	-54.35	N/A

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

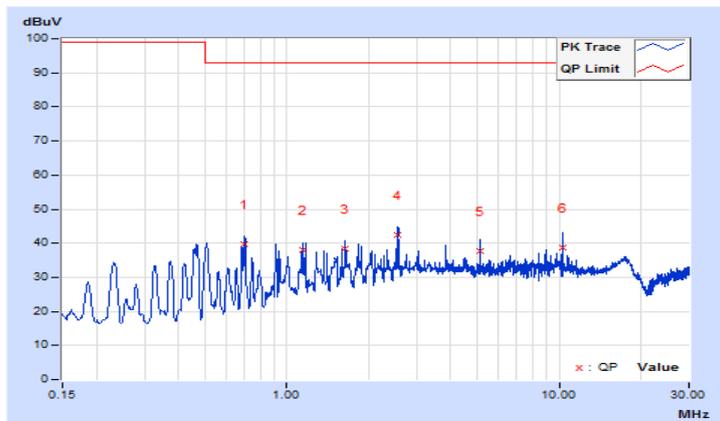

6 Radiated Disturbance up to 1 GHz

6.1 Limits

Frequency (MHz)	dBuV/m (at 10m) / quasi-peak
30 - 230	40
230 - 1000	47

- Notes: 1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

6.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ (V)	ESR	101240	Oct. 30, 2018	Oct. 29, 2019
Test Receiver ROHDE & SCHWARZ (H)	ESR3	102412	Feb. 14, 2019	Feb. 13, 2020
BILOG Antenna SCHWARZBECK (V)	VULB9168	9168-148	Nov. 20, 2018	Nov. 19, 2019
BILOG Antenna SCHWARZBECK (H)	VULB9168	9168-156	Nov. 20, 2018	Nov. 19, 2019
Preamplifier Sonoma (V)	310N	352924	Jul. 12, 2018	Jul. 11, 2019
Preamplifier Sonoma (H)	310N	352923	Jul. 12, 2018	Jul. 11, 2019
RF signal cable (with 5dB PAD) Times (V)	LMR-600 (18M) +LMR-400 (7M)	CABLE-CH1 (VER) -01	Oct. 03, 2018	Oct. 02, 2019
RF signal cable (with 5dB PAD) Times (H)	LMR-600 (11.8M) +LMR-400 (7M)	CABLE-CH1 (HOR) -01	Oct. 03, 2018	Oct. 02, 2019
Software BV ADT	BV ADT_Radiated_ V8.7.08	NA	NA	NA
Antenna Tower (V)	MFA-440	9707	NA	NA
Antenna Tower (H)	MFA-440	970705	NA	NA
Turn Table	DS430	50303	NA	NA
Controller (V)	MF7802	074	NA	NA
Controller (H)	MF7802	08093	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The IC Site Registration No. is IC 7450F-1.
 4. The VCCI Site Registration No. is R-11893.

6.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for quasi-peak detection (QP) at frequency up to 1 GHz.

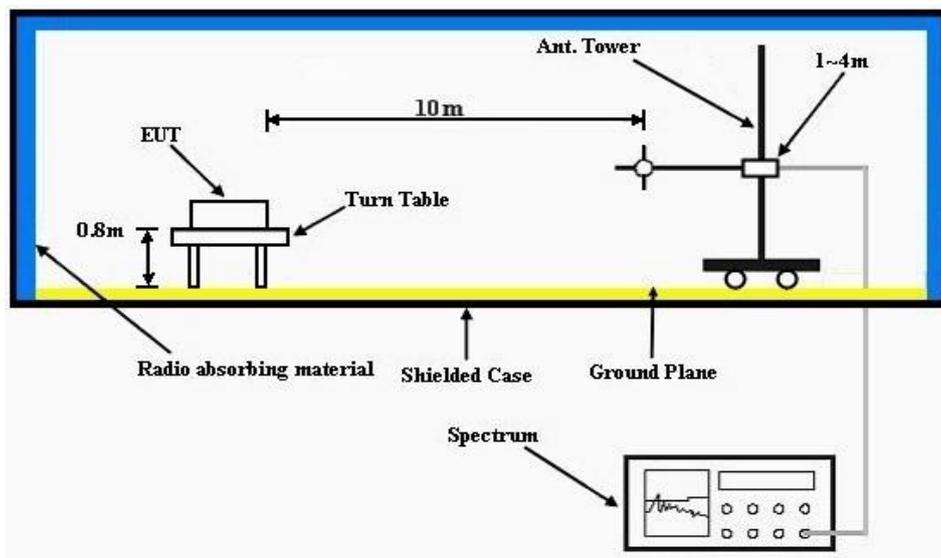


6.4 Test Results

Frequency Range	30MHz ~ 1GHz	Detector Function & Bandwidth	Quasi-Peak (QP), 120kHz
Tested by	Daniel Lin	Environmental Conditions	20°C, 60%RH
Test Mode	Mode 1	Test Date	2019/4/11

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.89	26.20 QP	40.00	-13.80	4.00 H	328	40.95	-14.75
2	95.82	26.73 QP	40.00	-13.27	3.50 H	101	44.45	-17.72
3	148.49	31.25 QP	40.00	-8.75	3.50 H	132	44.92	-13.67
4	394.11	32.38 QP	47.00	-14.62	3.00 H	116	42.15	-9.77
5	648.02	36.45 QP	47.00	-10.55	2.00 H	28	40.72	-4.27
6	695.99	31.19 QP	47.00	-15.81	2.00 H	94	35.77	-4.58
7	891.02	37.07 QP	47.00	-9.93	3.00 H	226	38.61	-1.54

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

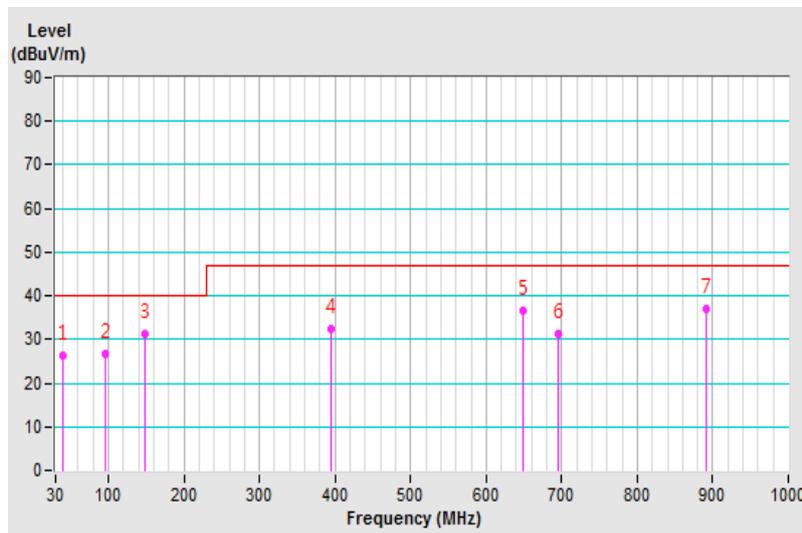


Frequency Range	30MHz ~ 1GHz	Detector Function & Bandwidth	Quasi-Peak (QP), 120kHz
Tested by	Daniel Lin	Environmental Conditions	20°C, 60%RH
Test Mode	Mode 1	Test Date	2019/4/11

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.89	33.01 QP	40.00	-6.99	3.00 V	282	47.69	-14.68
2	63.18	35.75 QP	40.00	-4.25	4.00 V	77	50.46	-14.71
3	89.17	32.72 QP	40.00	-7.28	2.00 V	71	51.00	-18.28
4	148.49	27.29 QP	40.00	-12.71	3.00 V	278	40.69	-13.40
5	163.53	27.03 QP	40.00	-12.97	2.00 V	323	40.04	-13.01
6	328.10	22.92 QP	47.00	-24.08	2.00 V	339	33.41	-10.49
7	395.66	24.98 QP	47.00	-22.02	2.00 V	343	34.11	-9.13
8	648.02	31.93 QP	47.00	-15.07	4.00 V	332	35.80	-3.87
9	792.02	29.13 QP	47.00	-17.87	3.00 V	228	30.00	-0.87
10	891.02	36.51 QP	47.00	-10.49	3.00 V	236	37.52	-1.01

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

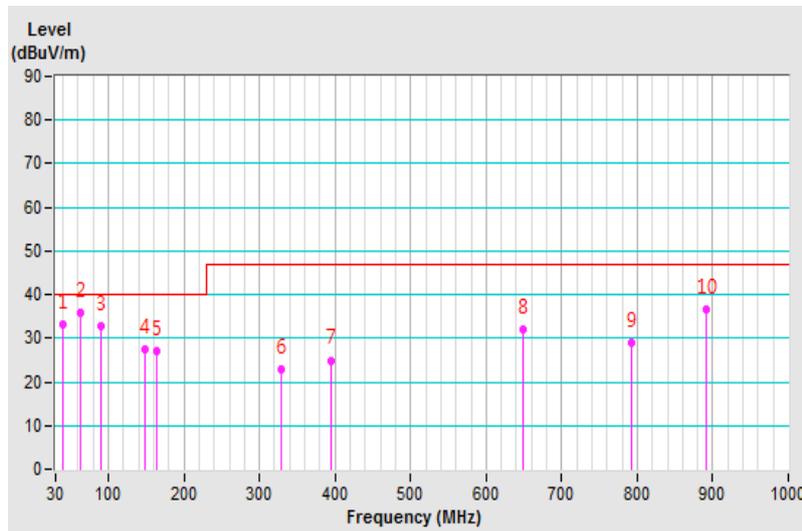

7 Radiated Disturbance above 1 GHz

7.1 Limits

Frequency (GHz)	Class A (dBuV/m) (at 3 m)		Class B (dBuV/m) (at 3 m)	
	Average	Peak	Average	Peak
1 to 3	56	76	50	70
3 to 6	60	80	54	74

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the EUT or on which the EUT operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108-500	2000
500-1000	5000
Above 1000	Up to 5 times of the highest frequency or 6 GHz, whichever is less

7.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ (Above 1GHz)	ESR7	101471	Mar. 07, 2019	Mar. 06, 2020
Spectrum Analyzer Agilent	E4446A	MY51100039	Sep. 10, 2018	Sep. 09, 2019
RF signal cable (with 5dB PAD) Times	LMR-400 (18M)	CABLE-CH2-01	Apr. 27, 2018	Apr. 26, 2019
HORN Antenna (with 4dB PAD) SCHWARZBECK	BBHA 9120 D	9120D-405	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier Agilent (Above 1GHz)	8449B	3008A01961	Oct. 15, 2018	Oct. 14, 2019
RF Coaxial Cable JUNFLON+EMC	JUNFLON+EMC10 4-SM-SM-6000	Cable-CH2- 02(MWX3221308G003+1307 10)	Jun. 11, 2018	Jun. 10, 2019
Software BV ADT	BV ADT_Radiated_ V8.7.08	NA	NA	NA
Antenna Tower BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Controller BV ADT	SC100	SC93021702	NA	NA
BandPass Filter (2.4G) MICRO-TRONICS	BRM17690-01	003	Sep. 12, 2018	Sep. 11, 2019
BandPass Filter (5G) MICRO-TRONICS	BRM50716-01	G011	Sep. 12, 2018	Sep. 11, 2019

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC 7450F-2.
5. The VCCI Site Registration No. is G-10018.

7.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3 dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1 GHz.

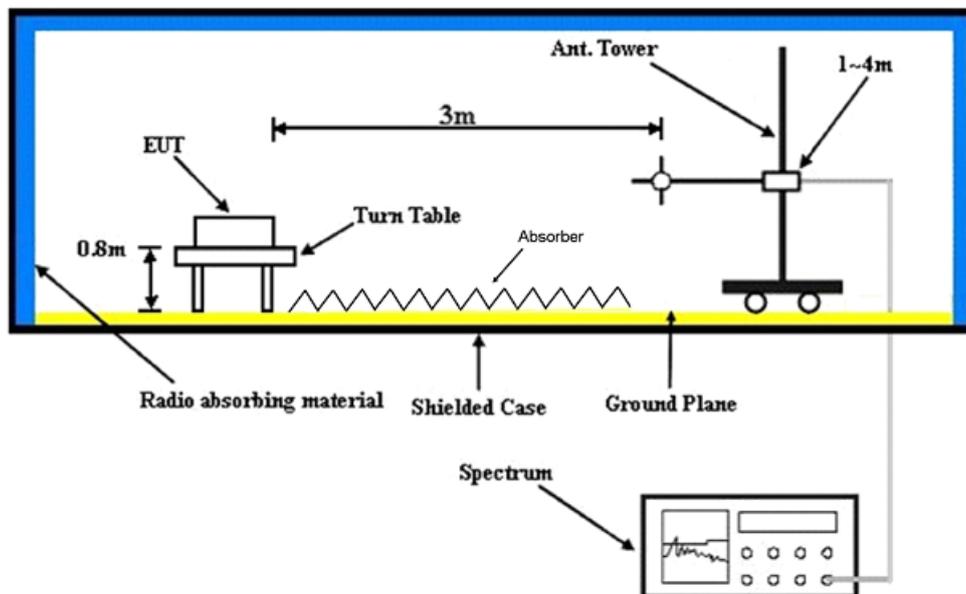

Note: According to EN 55032 standard, cables on the RGP must be insulated.


7.4 Test Results

Frequency Range	1GHz ~ 6GHz	Detector Function & Bandwidth	Peak (PK) / Average (AV), 1MHz
Tested by	Kai Chu	Environmental Conditions	22°C, 62%RH
Test Mode	Mode 1	Test Date	2019/4/12

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1188.01	55.93 PK	76.00	-20.07	1.80 H	239	58.85	-2.92
2	1188.01	46.59 AV	56.00	-9.41	1.80 H	239	49.51	-2.92
3	1336.51	61.29 PK	76.00	-14.71	1.46 H	183	62.94	-1.65
4	1336.51	52.85 AV	56.00	-3.15	1.46 H	183	54.50	-1.65
5	1484.99	62.57 PK	76.00	-13.43	1.38 H	193	64.16	-1.59
6	1484.99	52.97 AV	56.00	-3.03	1.38 H	193	54.56	-1.59
7	2587.52	55.87 PK	76.00	-20.13	1.00 H	12	53.06	2.81
8	2587.52	43.65 AV	56.00	-12.35	1.00 H	12	40.84	2.81
9	2887.04	59.80 PK	76.00	-16.20	1.19 H	234	55.96	3.84
10	2887.04	42.30 AV	56.00	-13.70	1.19 H	234	38.46	3.84
11	4454.97	58.73 PK	80.00	-21.27	1.00 H	210	51.01	7.72
12	4454.97	50.08 AV	60.00	-9.92	1.00 H	210	42.36	7.72

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value

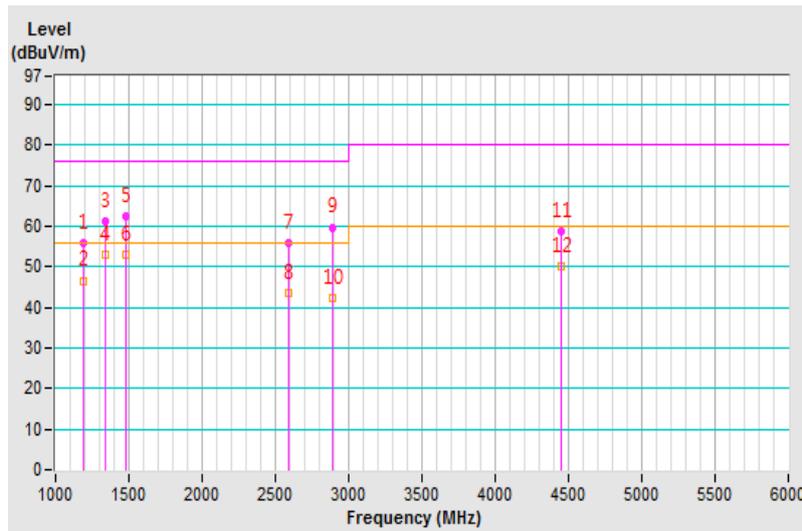


Frequency Range	1GHz ~ 6GHz	Detector Function & Bandwidth	Peak (PK) / Average (AV), 1MHz
Tested by	Kai Chu	Environmental Conditions	22°C, 62%RH
Test Mode	Mode 1	Test Date	2019/4/12

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1336.51	61.24 PK	76.00	-14.76	1.61 V	119	62.89	-1.65
2	1336.51	52.91 AV	56.00	-3.09	1.61 V	119	54.56	-1.65
3	1485.01	58.87 PK	76.00	-17.13	1.29 V	189	60.46	-1.59
4	1485.01	49.22 AV	56.00	-6.78	1.29 V	189	50.81	-1.59
5	1897.17	56.63 PK	76.00	-19.37	1.00 V	210	56.73	-0.10
6	1897.17	42.36 AV	56.00	-13.64	1.00 V	210	42.46	-0.10
7	2311.62	56.50 PK	76.00	-19.50	1.00 V	197	53.78	2.72
8	2311.62	37.96 AV	56.00	-18.04	1.00 V	197	35.24	2.72
9	2955.90	55.83 PK	76.00	-20.17	1.90 V	116	51.99	3.84
10	2955.90	35.88 AV	56.00	-20.12	1.90 V	116	32.04	3.84
11	4454.94	58.10 PK	80.00	-21.90	1.00 V	155	50.38	7.72
12	4454.94	48.69 AV	60.00	-11.31	1.00 V	155	40.97	7.72

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

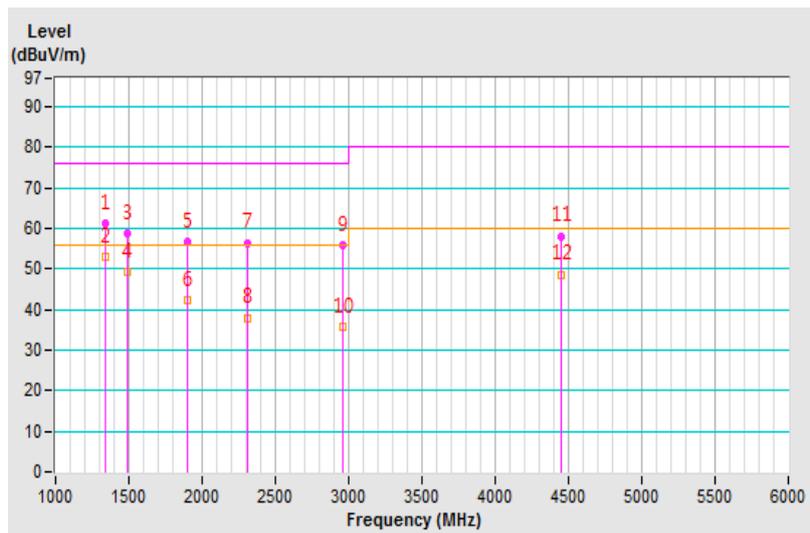

8 Electrostatic Discharge Immunity Test (ESD)

8.1 Test Specification

Basic Standard:	EN/IEC 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Discharge Voltage:	Air Discharge: $\pm 2, \pm 4, \pm 8$ kV (Direct) Contact Discharge: $\pm 2, \pm 4$ kV, ± 6 kV (Direct/Indirect)
Number of Discharge:	Minimum 20 times at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1-second minimum


8.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ELECTRONIC DISCHARGE SIMULATOR (NOISEKEN)	ESS-B3011	ESS12Z5082	Nov. 19, 2018	Nov. 18, 2019

- Notes:
1. The test was performed in Hwa Ya ESD Room 4.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

8.3 Test Arrangement

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

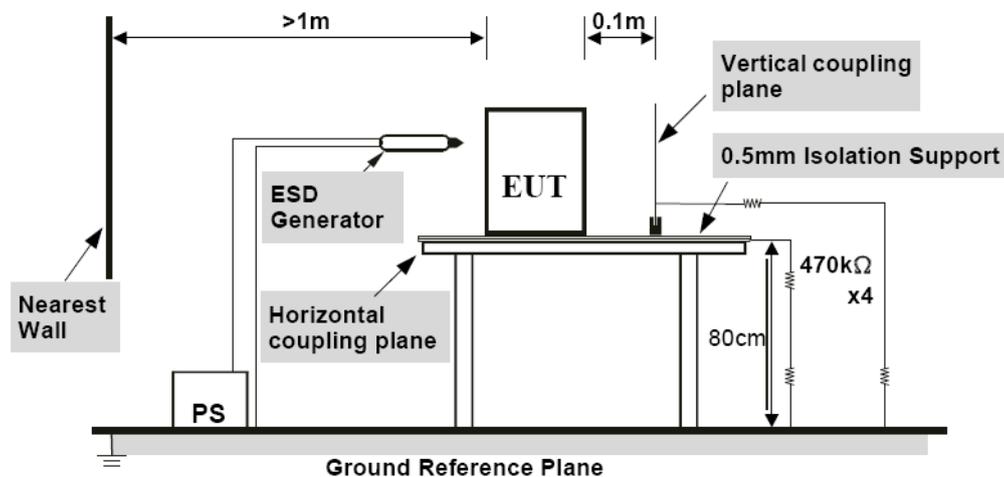

8.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Koma Kuo
Environmental Conditions	22 °C, 50% RH 986 mbar	Test Date	2019/04/02
Test mode	1		

Test Results of Direct Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge	Performance Criterion
2, 4	+/-	6-9	N/A	Note 1	A
8	+/-	8, 9	N/A	Note 1	A
8	+/-	6, 7	N/A	Note 2 & Note 3 & Note 4	B
2,	+/-	1-5	Note 1	N/A	A
4	+/-	1-5	Note 4	N/A	B
6	+/-	1-5	Note 3 & Note 4	N/A	B

Description of test points of direct application: Please refer to following page for representative mark only.

Test Results of Indirect Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criterion
2, 4, 6	+/-	Four Sides	Note 1	Note 1	A



Description of test points of indirect application:



1. Front side 2. Rear side 3. Right side 4. Left side



Note: 1. The EUT function was correct during the test.

2. The HDD R/W had loss function during the test, but could self -recover to the initial operation after the test.
3. The EUT LAN had "request time out (Link ok) message during the test, but could self -recover to the initial operation after the test.
4. The monitor had flickered during the test, but could self -recover to the initial operation after the test.

Description of Test Points

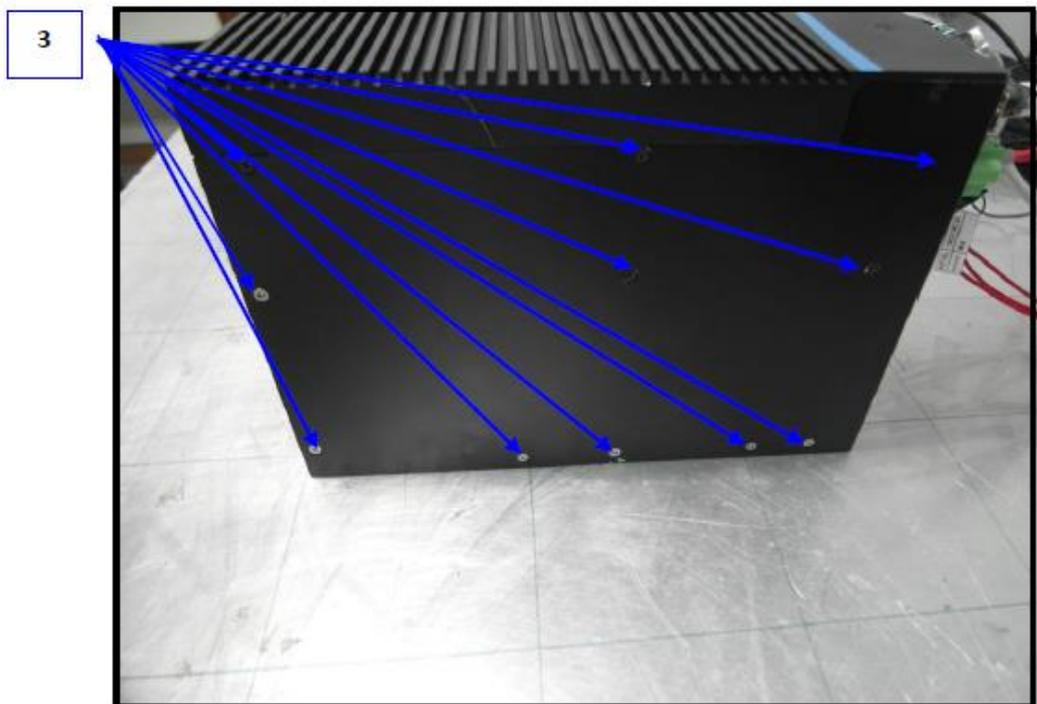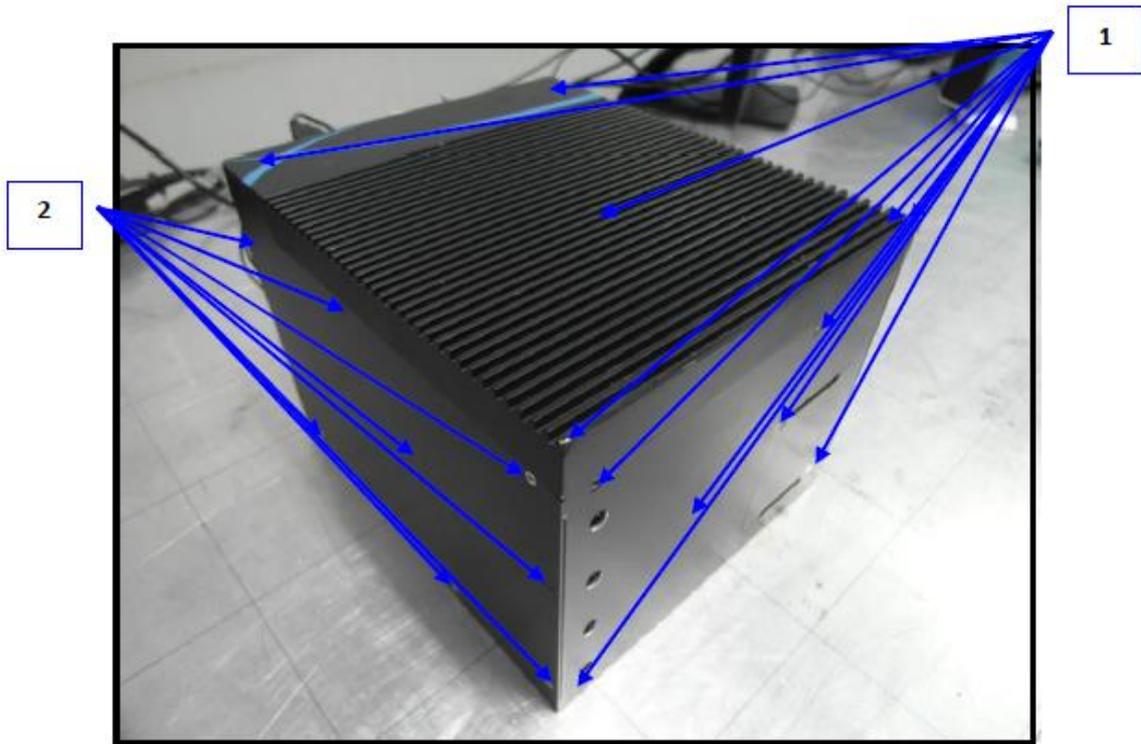

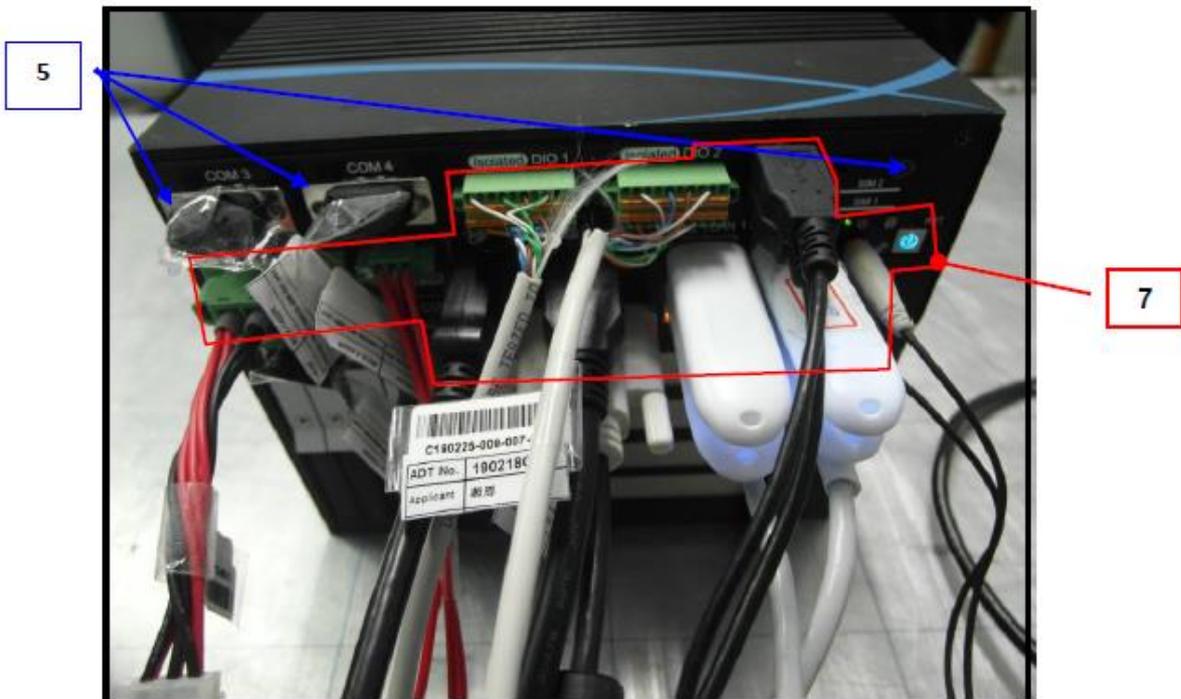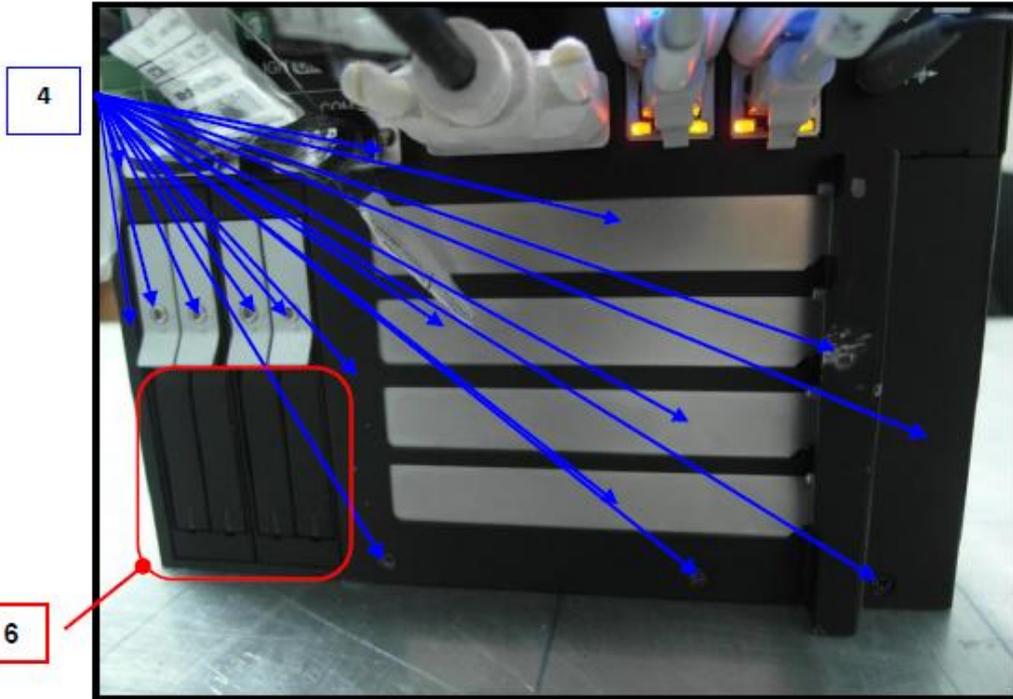

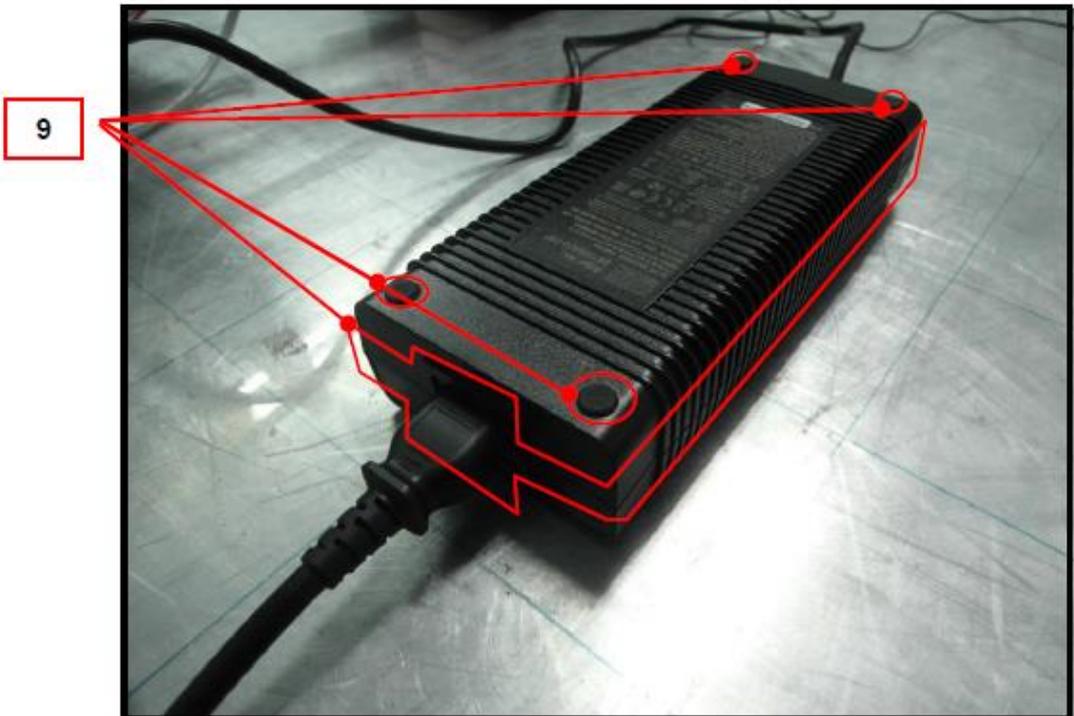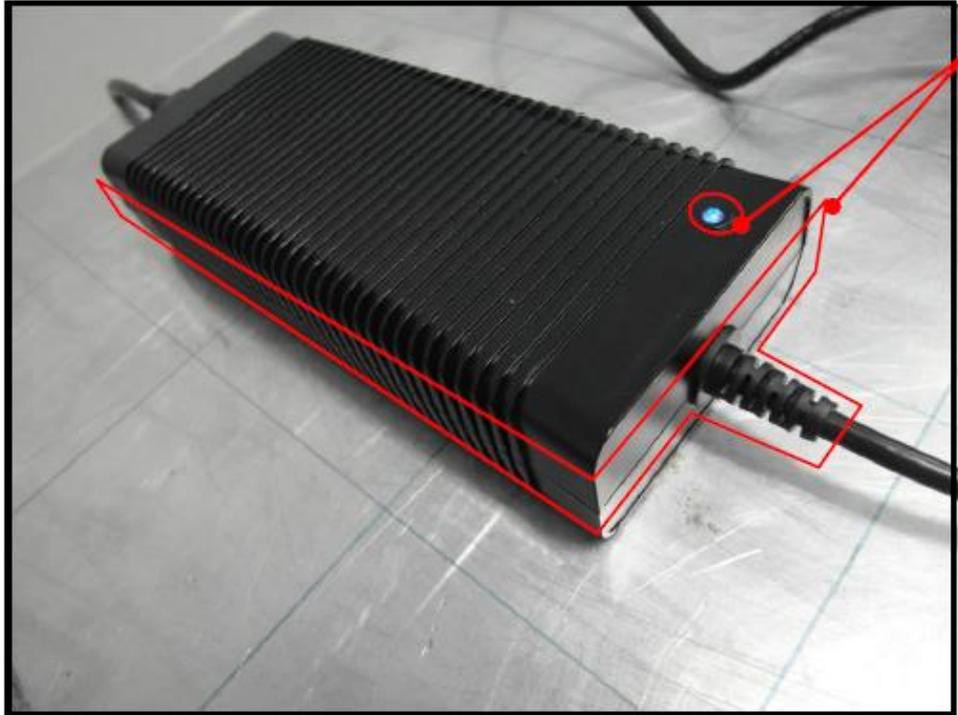

9 Radio-frequency Electromagnetic Field Immunity Test (RS)

9.1 Test Specification

Basic Standard:	EN/IEC 61000-4-3 80-1000 MHz, 20V/m ¹
Frequency Range, Field Strength:	1400-2000 MHz, 10V/m 2100-2700 MHz, 5V/m 5100-6000 MHz, 3V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Antenna Height:	1.5m
Dwell Time:	3 seconds

Note 1: This limit applies to equipment mounted in the passenger compartments, drivers cab or external to the rolling stock (roof, underframe). For equipment mounted in all other areas a severity level of 10 V/m may be used.

9.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
BONN Power Amp	BLMA 1060-100/50D	118694	NA	NA
BBA Power Amp	B250C125	101011	NA	NA
Power Sensor	NRP-Z91	101572	Jan. 24, 2019	Jan. 23, 2020
Power Sensor	NRP-Z91	101573	Jan. 18, 2019	Jan. 17, 2020
Signal Generator	SMB100A	105801	Jan. 17, 2019	Jan. 16, 2020
R&S Software	EMC32 Version 8.52.0	NA	NA	NA
Stacked Log-Per Antenna	STLP9149	9149-141	NA	NA
High GAIN LOG-Periodic Antenna	HL046E	100114	NA	NA

- Notes:
1. The test was performed in Hwa Ya RS Room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The transmit antenna was located at a distance of 3 meters from the EUT.

9.3 Test Arrangement

The test procedure was in accordance with EN/IEC 61000-4-3.

- The testing was performed in a fully chamber.
- The frequency ranges and field strength levels are 80-1000 MHz, 20V/m, 1400-2100 MHz, 10V/m, 2100-2500 MHz, 5V/m, 3V/m with the signal 80% amplitude modulated with a 1kHz sine wave.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides (We have pretested all test modes at front (0°) side to select the worst mode. According to the pretest result, only the worst mode was tested at four sides and other modes were tested at front side according to the worst side tested at pretested.)

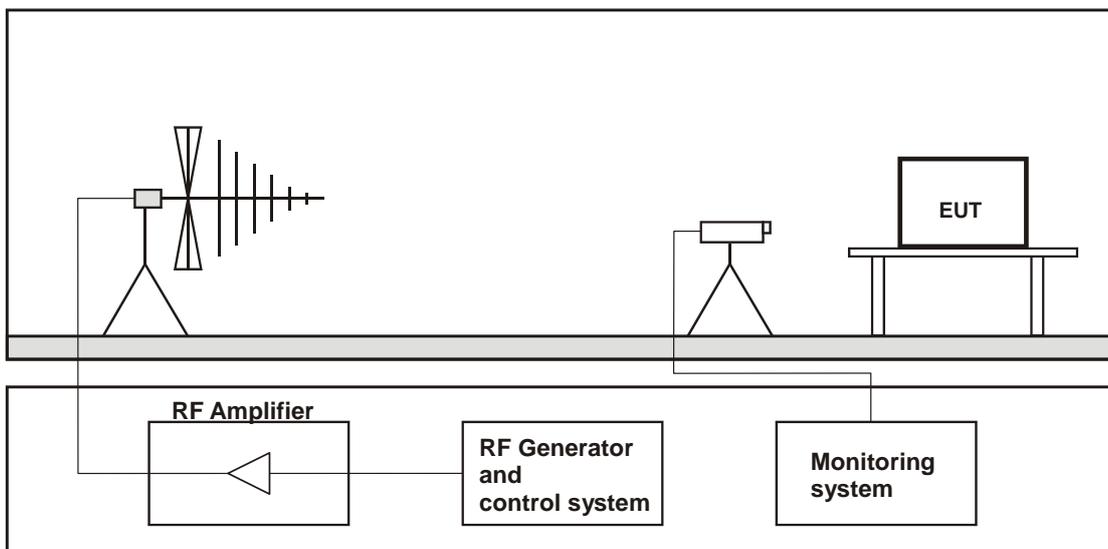

9.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Evan Liao
Environmental Conditions	22 °C, 57% RH	Test Date	2019/03/29
Test mode	1		

Frequency (MHz)	Polarity	Azimuth(°)	Applied Field Strength		Observation	Test Distance (m)	Performance Criterion
			(V/m)	Modulation			
80 - 1000	V&H	0, 90, 180, 270	20	80% AM (1kHz)	Note 1	1.5	A
1400 - 2000	V&H	0, 90, 180, 270	10	80% AM (1kHz)	Note 1	3	A
2000 - 2700	V&H	0, 90, 180, 270	5	80% AM (1kHz)	Note 1	3	A
5100 - 6000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note 1	3	A

Note: 1. The EUT function was correct during the test.

10 Electrical Fast Transient/Burst Immunity Test (EFT)

10.1 Test Specification

Basic Standard:	EN/IEC 61000-4-4
Test Voltage:	Signal & communication, process measurement & control ports: $\pm 2\text{kV}$, Capacitive clamp Auxiliary a.c. power input ports (rated voltage $\leq 400\text{ Vrms}$): $\pm 2\text{kV}$
Impulse Repetition Frequency:	5kHz
Impulse Wave Shape:	5/50 (T_r/T_h) ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	1 min.


10.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
EFT Generator EMC-Partner	TRA2000 EFT-C1	623	May 11, 2018	May 10, 2019
Capacitive Coupling clamp EMC-Partner	CN-EFT1000	364	May 11, 2018	May 10, 2019
EFT Adapter WONPRO	WA	EF1Ada-001	NA	NA
Software	EMC-Partner GENECS	NA	NA	NA

- Notes: 1. The test was performed in Hwa Ya EFT Room 2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

10.3 Test Arrangement

- Both positive and negative polarity discharges were applied.
- The distance between any coupling devices and the EUT should be 0.5 m for table-top equipment testing, and 1.0 m for floor standing equipment.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with EN/IEC 61000-4-4, 5/50 ns.

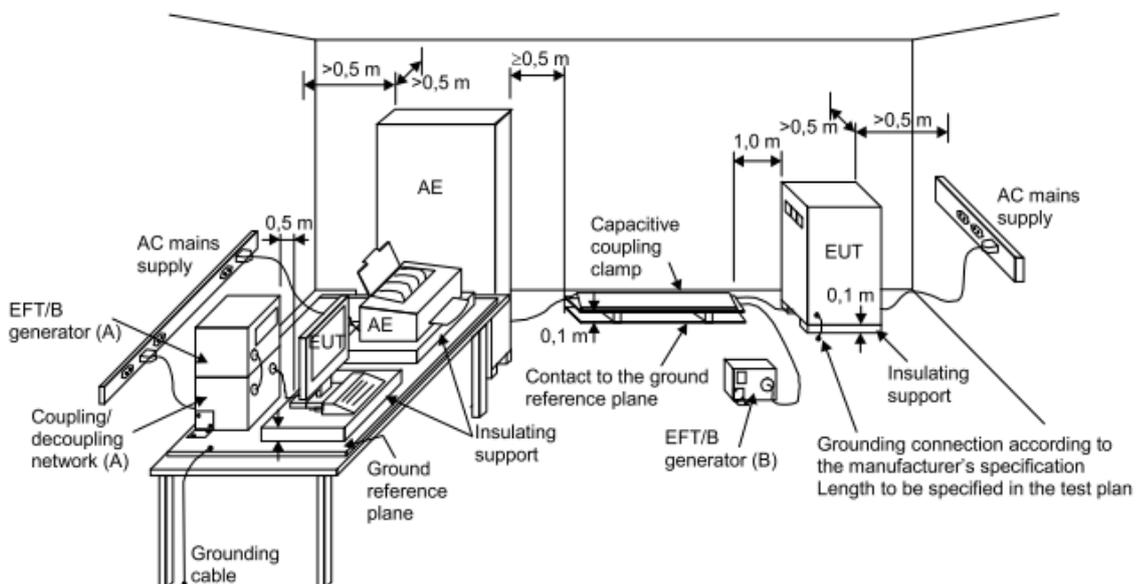

10.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Vison Tseng
Environmental Conditions	22 °C, 57% RH	Test Date	2019/03/26
Test mode	1		

Auxiliary a.c. power input ports (rated voltage \leq 400 Vrms)

Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criterion
2	L1	+/-	Note 1	A
2	L2	+/-	Note 1	A
2	PE	+/-	Note 1	A
2	L1-L2-PE	+/-	Note 1	A

Note: 1. The EUT function was correct during the test.

Input Power	230 Vac, 50 Hz	Tested by	Vison Tseng
Environmental Conditions	22 °C, 57% RH	Test Date	2019/03/26
Test mode	2		

Signal & communication, process measurement & control ports

Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criterion
2	LAN 1	+/-	Note 1	A

Note: 1. The EUT function was correct during the test.

11 Surge Immunity Test

11.1 Test Specification

Basic Standard:	EN/IEC 61000-4-5
Wave-Shape:	Auxiliary a.c. power input ports (rated voltage ≤ 400 Vrms): 1.2/50 μ s Open Circuit Voltage 8/20 μ s Short Circuit Current
Test Voltage:	Line to line: ± 0.5 kV, ± 1 kV, Line to ground: ± 0.5 kV, ± 1 kV, ± 2 kV output impedance of 42 Ω (40 Ω and 2 Ω generator) and a coupling capacitance of 0,5 μ F
AC Phase Angle (degree):	0°, 90°, 180°, 270°
Pulse Repetition Rate:	1 time / 60 sec.
Number of Tests:	5 positive and 5 negative at selected points

11.2 Test Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Universal Surge Coupling De-Coupling Network em test	CNV 508T5	P1508149592	Aug. 29, 2018	Aug. 28, 2019
Universal Surge Coupling De-Coupling Network TESEQ	CDN HSS-2	41008	Aug. 28, 2018	Aug. 27, 2019
Modular Impulse Generator TESEQ	NSG 3060 / CDN 3061	1796 / 1554	Oct. 15, 2018	Oct. 14, 2019
Telecom surge module TESEQ	NSG 3060	1799	Oct. 15, 2018	Oct. 14, 2019

- Notes: 1. The test was performed in Hwa Ya Surge Room 1.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

11.3 Test Arrangement

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).

For double-insulated products without PE or external earth connections, the test shall be done in a similar way as for grounded products but without adding any additional external grounded connections. If there are no other possible connections to earth, line-to-ground tests may be omitted.

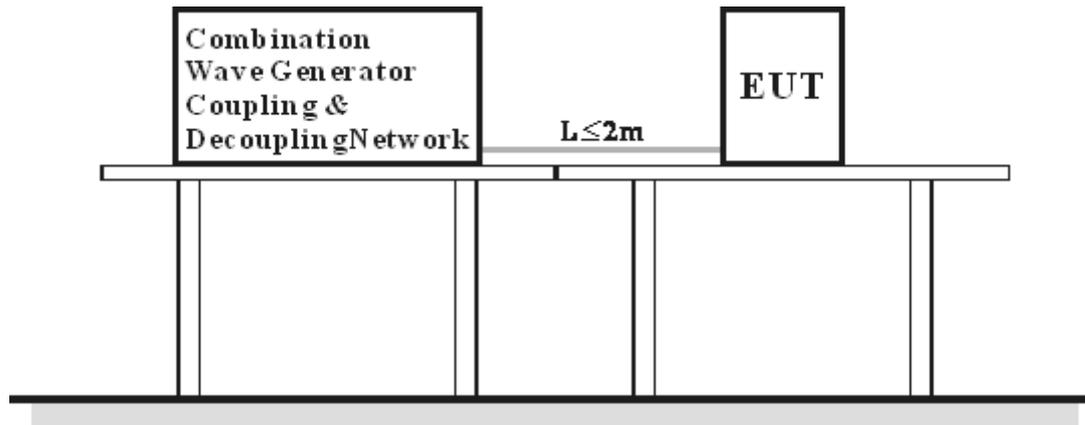

11.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Andy Chang
Environmental Conditions	22 °C, 57% RH	Test Date	2019/03/26
Test mode	1		

Auxiliary a.c. power input ports (rated voltage ≤ 400 Vrms)

Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criterion
0.5, 1	L1-L2	+/-	Note 1	A
0.5, 1, 2	L1-PE	+/-	Note 1	A
0.5, 1, 2	L2-PE	+/-	Note 1	A

Note: 1. The EUT function was correct during the test.

12 Immunity to Conducted Disturbances Induced by RF Fields (CS)

12.1 Test Specification

Basic Standard:	EN/IEC 61000-4-6
Frequency Range:	0.15 MHz - 80 MHz
Voltage Level:	Auxiliary a.c. power input ports (rated voltage \leq 400 Vrms), Signal & communication, process measurement & control ports: 10 V
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Dwell Time	3 seconds

12.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
FCC POWER LINE COUPLING DECOUPLING NETWORK	FCC-801-M1-25A	03030	Jun. 15, 2018	Jun. 14, 2019
FCC POWER LINE COUPLING DECOUPLING NETWORK	FCC-801-M3-25A	03056	Nov. 05, 2018	Nov. 04, 2019
FCC SIGNAL LINE POWER LINE COUPLING DECOUPLING NETWORK	F-090407-1004-1	100923	Jun. 12, 2018	Jun. 11, 2019
Coupling Decoupling Network TESEQ	CDN T8-10	43230	Jun. 12, 2018	Jun. 11, 2019
Coupling Decoupling Network TESEQ	CDN T8-10	43229	Jun. 12, 2018	Jun. 11, 2019
EMI Injection Clamp	F203I-23MM	434	Nov. 05, 2018	Nov. 04, 2019
Amplifier Research Power Amplifier	75A250AM2	307804	NA	NA
Signal Generator ROHDE & SCHWARZ	SML01	102148	Nov. 19, 2018	Nov. 18, 2019
POWER METER BOONTON	4232A	107402	Jul. 12, 2018	Jul. 11, 2019
POWER SENSOR BOONTON	51011-EMC	33105	Jul. 12, 2018	Jul. 11, 2019
POWER SENSOR BOONTON	51011-EMC	33107	Jul. 12, 2018	Jul. 11, 2019
Software	ADT_CS_V37	NA	NA	NA
FCC POWER LINE COUPLING DECOUPLING NETWORK	FCC-801-M1-25A	03030	Jun. 15, 2018	Jun. 14, 2019

- Notes:
1. The test was performed in Hwa Ya CS Room 1.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

12.4 Test Results

Input Power	230 Vac, 50 Hz	Tested by	Leo Chen
Environmental Conditions	22 °C, 58% RH	Test Date	2019/04/10
Test mode	1		

Frequency (MHz)	Level (V rms)	Tested Line	Injection Method	Return Path	Observation	Remark	Performance Criterion
0.15 – 80	10	AC	CDN-M3	CDN-M1	Note 1	-	A

Note: 1. The EUT function was correct during the test.


Input Power	230 Vac, 50 Hz	Tested by	Leo Chen
Environmental Conditions	22 °C, 58% RH	Test Date	2019/04/10
Test mode	2		

Frequency (MHz)	Level (V rms)	Tested Line	Injection Method	Return Path	Observation	Remark	Performance Criterion
0.15 – 80	10	LAN 1	CDN-T8	CDN-M1	Note 1	-	A


Note: 1. The EUT function was correct during the test.

13 Pictures of Test Arrangements


13.1 Conducted Disturbance at Auxiliary a.c. or d.c. power ports

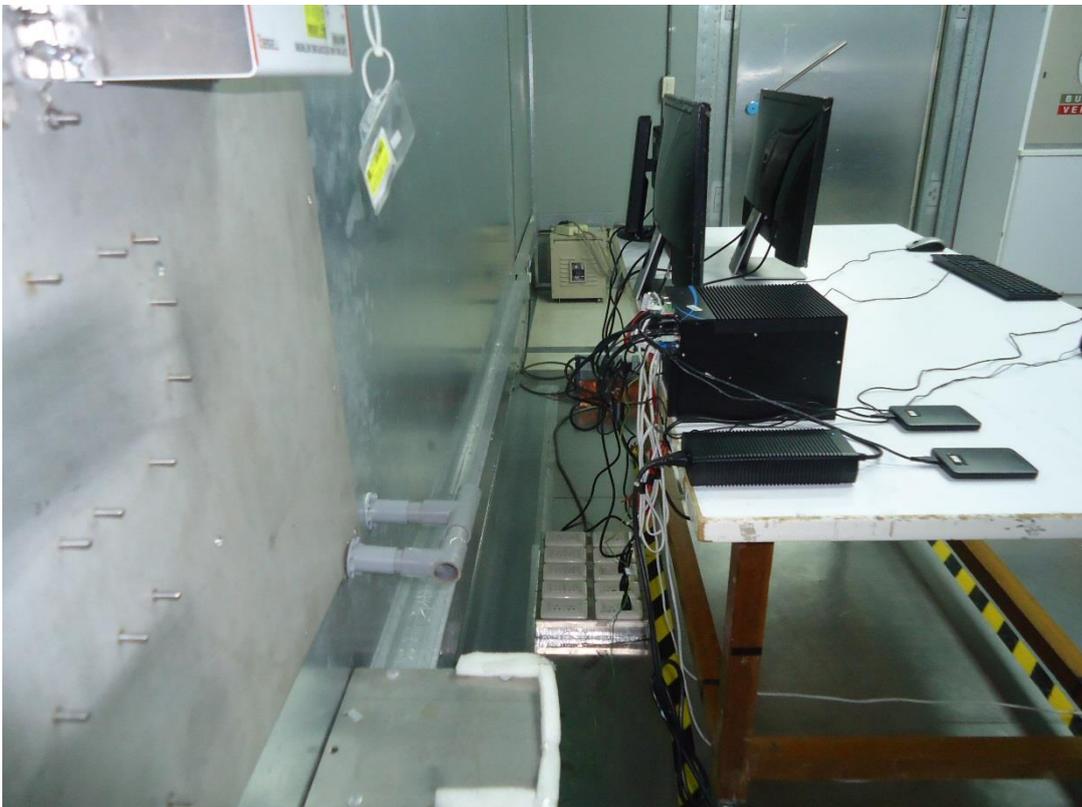

13.2 Radiated Disturbance up to 1 GHz

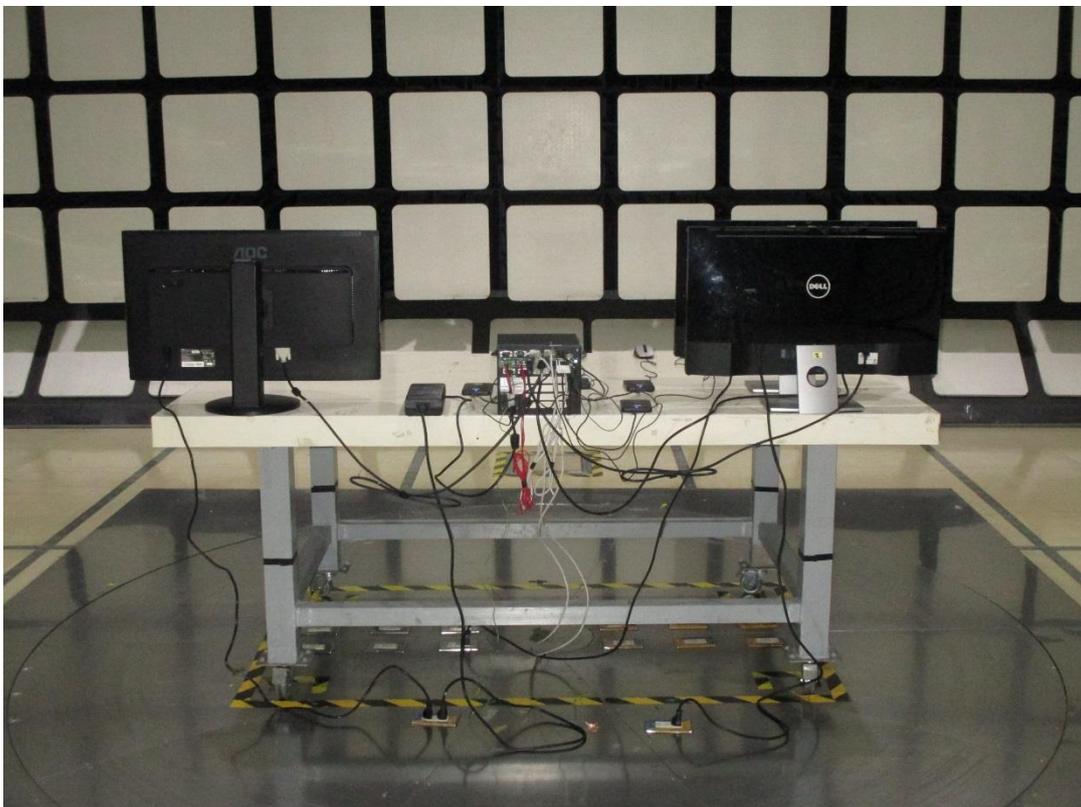

13.3 Radiated Disturbance above 1 GHz

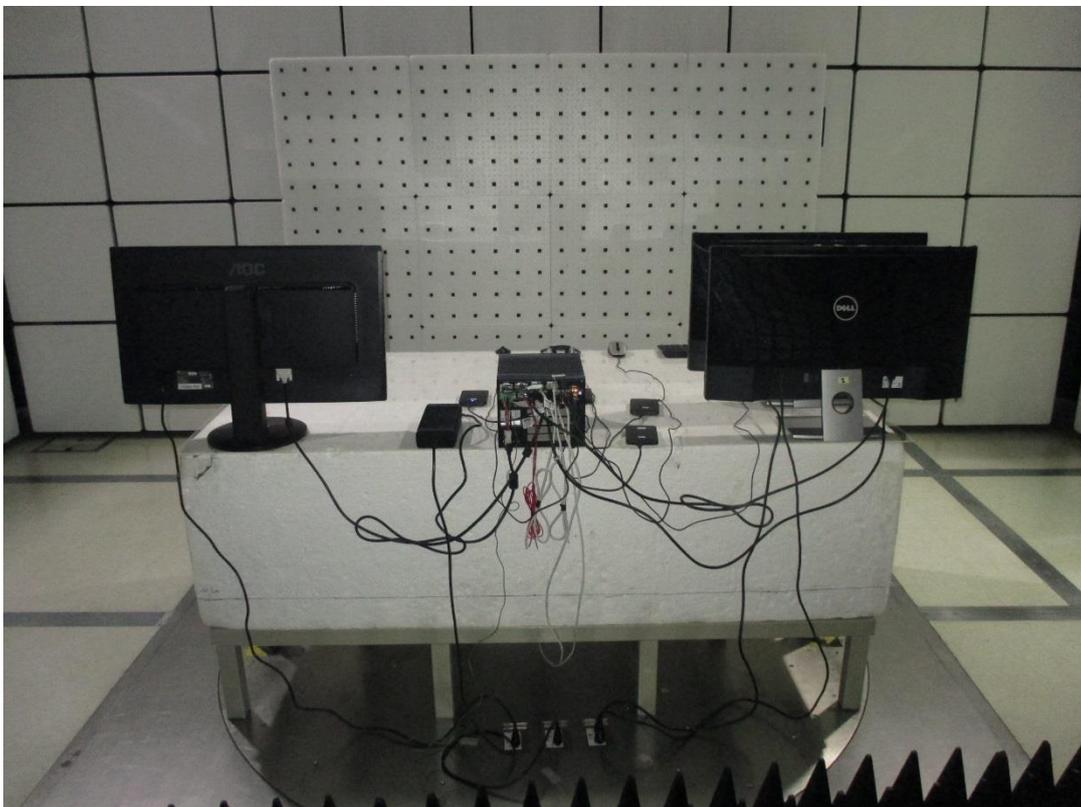


13.4 Electrostatic Discharge Immunity Test (ESD)




13.5 Radio-frequency Electromagnetic Field Immunity Test (RS)


(Mode 1_0 degree)

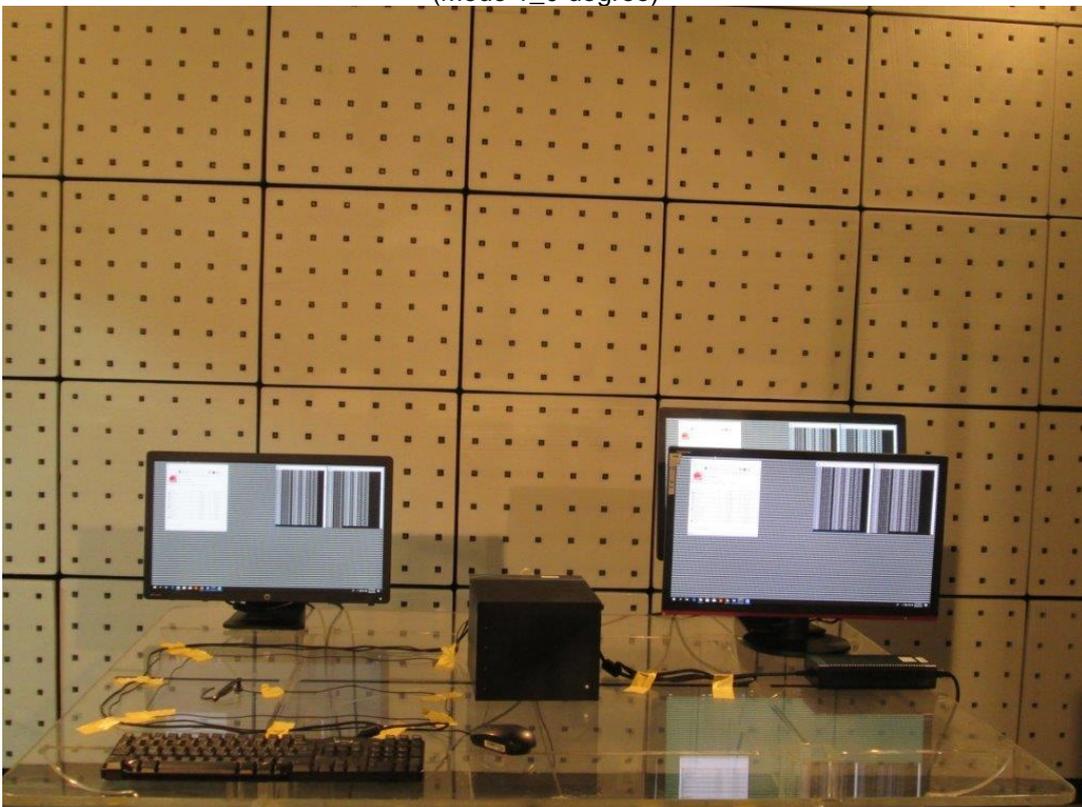

(Mode 1_90 degree)

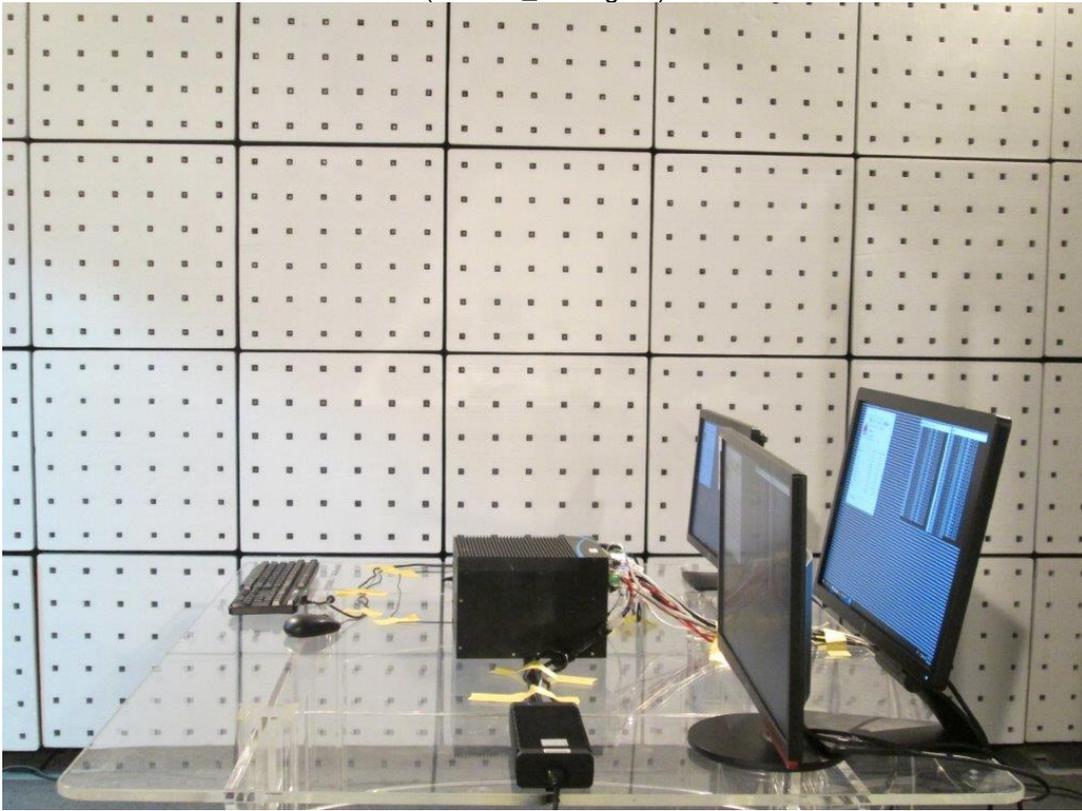

(Mode 1_180 degree)

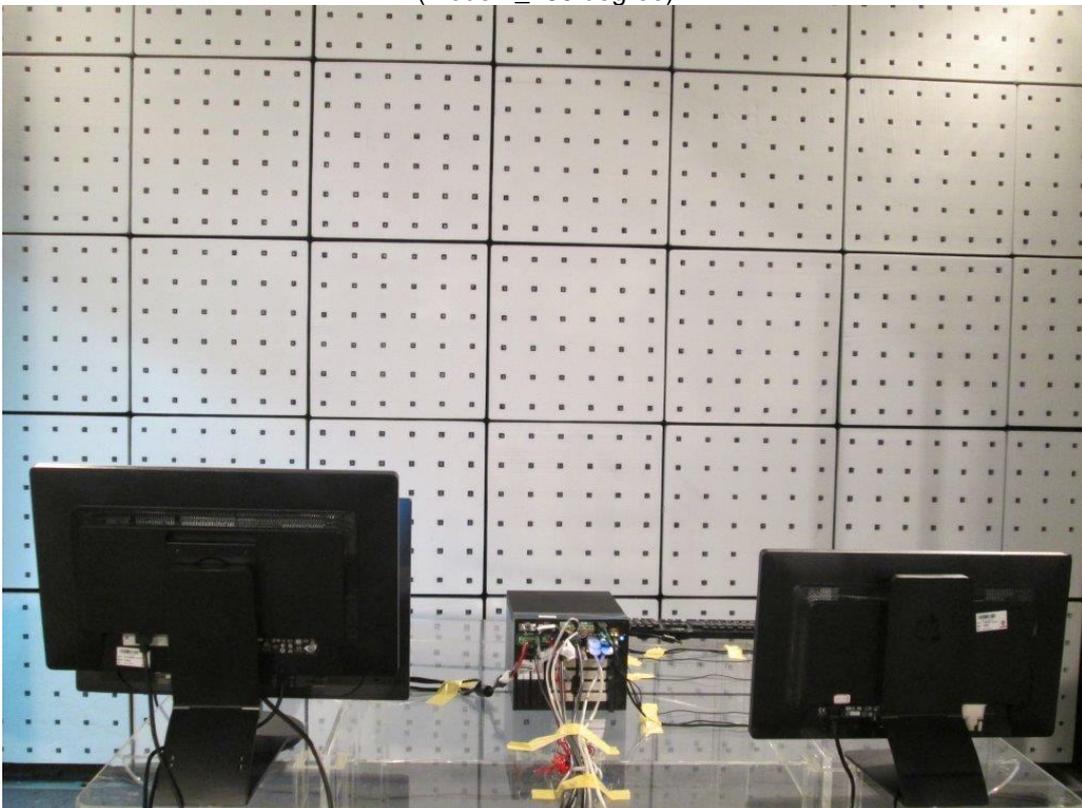

(Mode 1_270 degree)



13.6 Fast Transients (EFT)

(Mode 1_AC)



(Mode 2_LAN)



13.7 Surge



13.8 Radio-frequency common mode (CS)

(Mode 1_AC)



(Mode 2_LAN)



Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---