

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart B, Class A  
ANSI C63.4:2014

**Report No.:** FDBDBO-WTW-P22080202

**Model No.:** HPS-1000

**Series Model:** HPS-1XXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)

**Received Date:** 2022/8/4

**Test Date:** 2022/8/9~ 2022/8/10

**Issued Date:** 2022/9/1

**Applicant:** Vecow Co., Ltd.

**Address:** 3F., No. 10, Jiankang Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /**

**Designation Number:** 418586 / TW1078

**Approved by:** \_\_\_\_\_

*Jim Hsiang*

**Date:** \_\_\_\_\_

2022/9/1

Jim Hsiang / Associate Technical Manager

This test report consists of 30 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Jessica Cheng / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate.....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Supplementary Information .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 Description of EUT .....	6
3.2 Primary Clock Frequencies of Internal Source.....	6
3.3 Features of EUT .....	6
3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode .....	7
3.5 Test Program Used and Operation Descriptions .....	7
3.6 Connection Diagram of EUT and Peripheral Devices .....	8
3.7 Configuration of Peripheral Devices and Cable Connections .....	9
<b>4 Test Instruments.....</b>	<b>10</b>
4.1 Conducted Emissions from Power Ports .....	10
4.2 Radiated Emissions up to 1 GHz .....	11
4.3 Radiated Emissions above 1 GHz.....	12
<b>5 Limits of Test Items.....</b>	<b>13</b>
5.1 Conducted Emissions from Power Ports .....	13
5.2 Radiated Emissions up to 1 GHz .....	13
5.3 Radiated Emissions above 1 GHz.....	14
<b>6 Test Arrangements .....</b>	<b>15</b>
6.1 Conducted Emissions from Power Ports .....	15
6.2 Radiated Emissions up to 1 GHz .....	16
6.3 Radiated Emissions above 1 GHz.....	17
<b>7 Test Results of Test Item .....</b>	<b>18</b>
7.1 Conducted Emissions from Power Ports .....	18
7.2 Radiated Emissions up to 1 GHz .....	22
7.3 Radiated Emissions above 1 GHz.....	24
<b>8 Pictures of Test Arrangements .....</b>	<b>26</b>
8.1 Conducted Emissions from Power Ports .....	26
8.2 Radiated Emissions up to 1 GHz .....	28
8.3 Radiated Emissions above 1 GHz.....	29
<b>9 Information of the Testing Laboratories .....</b>	<b>30</b>



## Release Control Record

Issue No.	Description	Date Issued
FDBDBO-WTW-P22080202	Original release.	2022/9/1

## 1 Certificate

**Product:** High-performance Embedded System

**Brand:** Vecow

**Test Model:** HPS-1000

**Series Model:** HPS-1XXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)

**Sample Status:** Engineering sample

**Applicant:** Vecow Co., Ltd.

**Test Date:** 2022/8/9~ 2022/8/10

**Standard:** 47 CFR FCC Part 15, Subpart B, Class A  
ANSI C63.4:2014

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

## 2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces, evaluated functions, are as follows:

Standard / Clause	Test Item	Result	Remark
FCC Part 15.107	Conducted Emissions from Power Ports	Pass	Minimum passing Class A margin is -19.76 dB at 1.55206 MHz
FCC Part 15.109	Radiated Emissions up to 1 GHz	Pass	Minimum passing Class A margin is -3.52 dB at 45.47 MHz
FCC Part 15.109	Radiated Emissions above 1 GHz	Pass	Minimum passing Class A margin is -21.28 dB at 4800.17MHz

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)	Maximum allowable uncertainty (±)
Conducted Emissions from Power Ports	9 kHz ~ 30 MHz	3.00 dB	3.4 dB ( $U_{\text{CISPR}}$ )
Radiated Emissions up to 1 GHz	30 MHz ~ 1 GHz	3m : 5.64 dB 10m : 4.30 dB	6.3 dB ( $U_{\text{CISPR}}$ )
	1 GHz ~ 6 GHz	4.64 dB	5.2 dB ( $U_{\text{CISPR}}$ )
Radiated Emissions above 1 GHz	6 GHz ~ 18 GHz	4.60 dB	5.5 dB ( $U_{\text{CISPR}}$ )

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 Description of EUT

Product	High-performance Embedded System
Brand	Vecow
Test Model	HPS-1000
Series Model	HPS-1XXXXXXXXXXXXXXXXX ("X" can be 0-9, A-Z or blank for marketing purpose)
Model Difference	For marketing purpose.
Sample Status	Engineering sample
Operating Software	WIN10 PRO Burnintest 9.2
Power Supply Rating	DC from Adapter
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

The EUT uses following adapter.

Brand	LITEON
Model	PA-1181-28
Input Power	100-240V, 2.34A, 50-60Hz
Output Power	24V, 7.5A
Power Line	AC (3-Pin) cable (1.0m) DC cable (1.6m) with two ferrite cores.

#### 3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 3.6 GHz, provided by Vecow Co., Ltd., for detailed internal source, please refer to the manufacturer's specifications.

#### 3.3 Features of EUT

- The tests reported herein were performed according to the method specified by Vecow Co., Ltd., for detailed feature description, please refer to the manufacturer's specifications or user's manual.  
Please refer to appendix of the report if the applicant has provided additional descriptions of the EUT.
- The EUT configured with the following key components:

Components	Brand	Model	Specification
CPU	-	-	AMD Ryzen™ 3 PRO 5350GE
RAM	Kington	-	16GB 2Rx8 2Gx64-Bit PC4-2666 CL19 260-Pin SODIMM
SSD	MEMXPRO	-	2.5" SSD ET30 128GB WT

### 3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode


1. The EUT is designed with AC power of rating 100-240Vac, 50-60Hz.  
For radiated emission evaluation, 230Vac/50Hz (for EN 50155), 120Vac/60Hz (for FCC Part 15) had been covered during the pre-test. The worst data was found at **120Vac/60Hz** and recorded in the applied test report.
2. Test modes are presented in the report as below.

Test Condition	
Mode	Conducted Emissions from Power Ports
A	Full System+Input Power (120 Vac, 60 Hz)
B	Full System+Input Power (240 Vac, 60 Hz)
Mode	Radiated Emissions up to 1 GHz
A	Full System+Input Power (120 Vac, 60 Hz)
Mode	Radiated Emissions above 1 GHz
A	Full System+Input Power (120 Vac, 60 Hz)

### 3.5 Test Program Used and Operation Descriptions

- a. Turned on the power of all equipments.
- b. EUT ran a test program to enable all functions.
- c. EUT read and wrote messages to/ from SSD, and ext. HDD.
- d. EUT sent "H" messages to LCD panel and ext. LCD monitor. Then they displayed "H" messages on their screens simultaneously.
- e. EUT sent and received ping messages to/ from the Notebook PCs (kept in a remote area) via two STP LAN cables (10m each).
- f. Set EUT's RS-232 in loop back mode and enable it under transmission/receiving by itself.
- g. EUT sent "1kHz audio" signal to earphone.
- h. EUT sent messages to printer and printed them out.
- i. EUT receiving video image from POE camera, then EUT displayed it on screen.
- j. Steps c-i were repeated.

### 3.6 Connection Diagram of EUT and Peripheral Devices

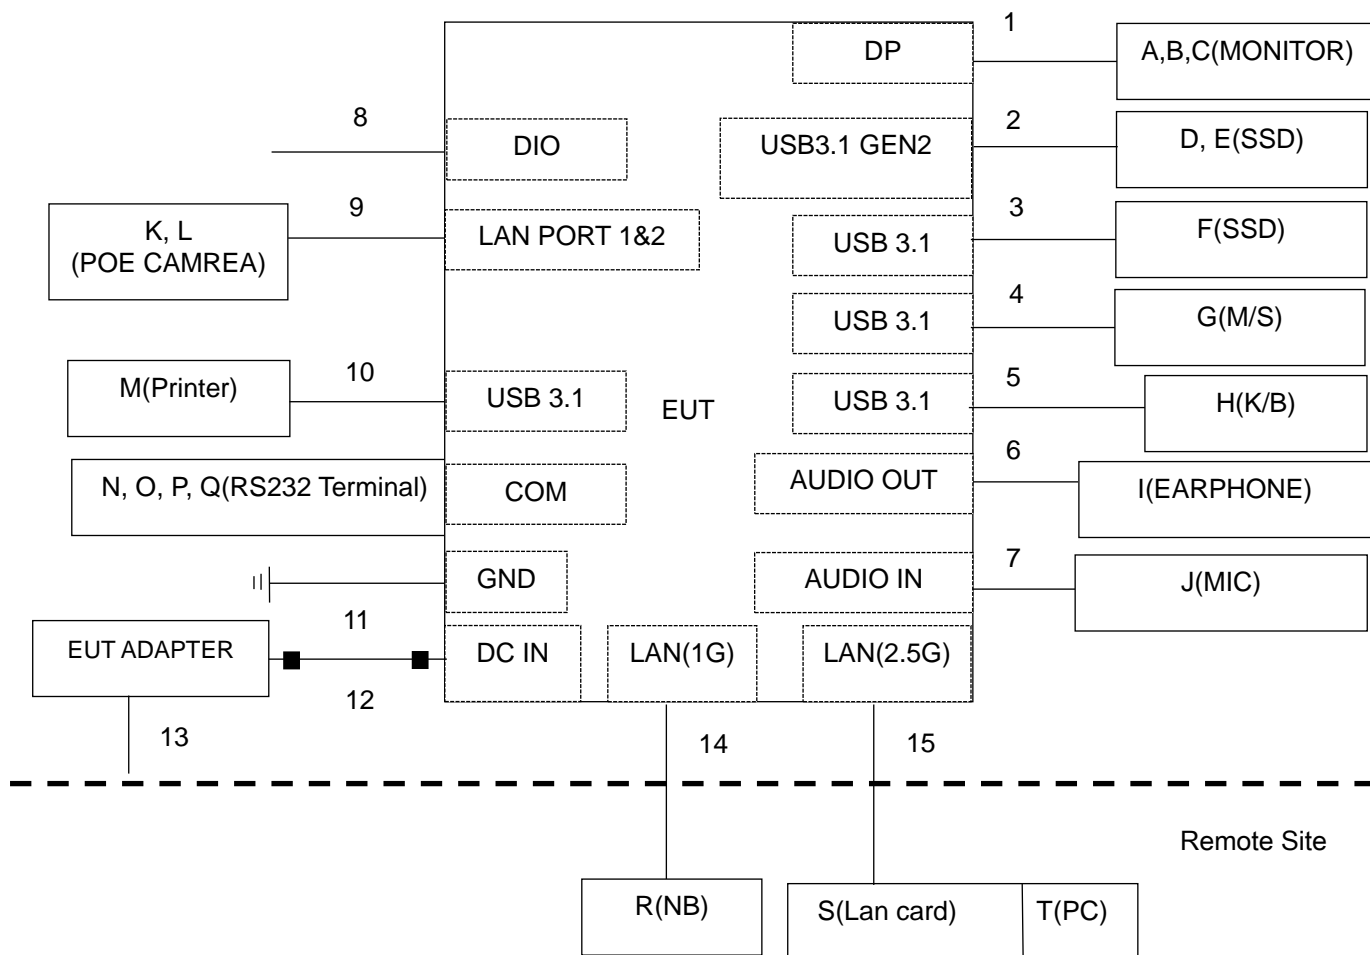



### 3.7 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Monitor	HP	LA2405wg	CN41210FHH	DoC	Provided by Lab
B	Monitor	HP	HP Z24s	6CM5172L58	NA	Provided by Lab
C	Monitor	DELL	U2410	CN082WXD728720 CC0KCL	DoC	Provided by Lab
D	USB 3.1 SSD	Crucial	CT500X8SSD9	1941E320114D	NA	Provided by Lab
E	USB 3.1 SSD	Crucial	CT500X8SSD9	1943E3201B6D	NA	Provided by Lab
F	USB 3.1 SSD	Crucial	CT500X8SSD9	1940E3200CFB	NA	Provided by Lab
G	USB Mouse	DELL	MOCZUL	CN-049TWY-PRC0 0-77B-007E	NA	Provided by Lab
H	USB Keyboard	Dell	KB216t	CN-0W33XP-LO30 0-7CL-1909	NA	Provided by Lab
I	EARPHONE	PHILIPS	SBC HL145	N/A	NA	Provided by Lab
J	Microphone	E-books	E-EPB099	N/A	NA	Provided by Lab
K	POE IP CAMARA	3MP	MBL030A-ORZ0310	NA	DOC	Supplied by applicant
L	POE IP CAMARA	3MP	MBL030A-ORZ0310	NA	DOC	Supplied by applicant
M	Printer	HP	HP Officejet Pro 251dW	NA	B94SDGOB1191	Provided by Lab
N	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
O	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
P	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
Q	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
R	Laptop	LENOVO	T480	PF1EZSAW	NA	Provided by Lab
S	10G LAN card	ASUS	XG-C100C	NA	DoC	Provided by Lab
T	PC	DELL	3010 SF	1JWQS02	NA	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DP cable	3	1.8	Yes	0	Provided by Lab
2	USB Type A to C cable	2	1	Yes	0	Provided by Lab
3	USB Type A to C cable	1	1	Yes	0	Provided by Lab
4	USB cable	1	1.8	Yes	0	Provided by Lab
5	USB cable	1	1.8	Yes	0	Provided by Lab
6	Audio (3.5") cable	1	1.2	No	0	Provided by Lab
7	Audio (3.5") cable	1	1.8	No	0	Provided by Lab
8	DIO cable	1	0.5	No	0	Provided by Lab
9	RJ45 (Cat. 5e) cable	2	2	Yes	0	Provided by Lab
10	USB 2.0 cable	1	1.8	Yes	0	Provided by Lab
11	GND (PE) cable	1	1.5	No	0	Provided by Lab
12	DC power cable	1	1.6	No	2	Accessory of EUT
13	AC power (3ping) cable	1	1	No	0	Accessory of EUT
14	RJ45 (Cat. 5e) cable	1	10	Yes	0	Provided by Lab
15	RJ45 (Cat. 5e) cable	1	10	Yes	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 Conducted Emissions from Power Ports

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Receiver R&S	ESCI	100412	2021/8/26	2022/8/25
LISN R&S	ENV216	101197	2022/7/5	2023/7/4
LISN R&S	ENV216	101195	2022/8/1	2023/7/31
LISN Schwarzbeck	NNLK8129	8129229	2022/6/8	2023/6/7
DC LISN Schwarzbeck	NNLK 8121	8121-808	2022/4/29	2023/4/28
LISN Schwarzbeck	NNLK 8121	8121-731	2022/5/26	2023/5/25
LISN Schwarzbeck	NNLK 8121	8121-00759	2021/8/17	2022/8/16
LISN R&S	ENV216	101196	2022/5/24	2023/5/23
LISN EMCO	3825/2	9504-2359	2022/8/2	2023/8/1
DC LISN R&S	ESH3-Z6	844950/018	2022/8/2	2023/8/1
LISN EMCO	3825/2	9204-1964	2022/6/17	2023/6/16
DC LISN R&S	ESH3-Z6	100219	2022/8/2	2023/8/1
Coupling/Dcoupling Network Schwarzbeck	CDNE-M2	00097	2022/6/1	2023/5/31
Coupling/Dcoupling Network Schwarzbeck	CDNE-M3	00091	2022/6/1	2023/5/31
Coupling/Dcoupling Network TESEQ	CDN A201A	44601	2021/12/22	2022/12/21
RF Coaxial Cable Commate	5D-FB	Cable-CO3-01	2021/9/15	2022/9/14
Attenuator STI	STI02-2200-10	NO.3	2021/10/22	2022/10/21
50 ohm terminal LYNICS	0900510	E1-011286	2021/10/1	2022/9/30
50 ohm terminal LYNICS	0900510	E1-011285	2021/10/1	2022/9/30
50 Ohms Terminator LYNICS	0900510	E1-01-305	2022/2/9	2023/2/8
Isolation Transformer Erika Fiedler	D-65396	017	2021/9/9	2022/9/8
Software BVADT	Cond_V7.3.7.4	NA	NA	NA

#### Notes:

1. The test was performed in Linkou Conduction 3.
2. Tested Date: 2022/8/10

## 4.2 Radiated Emissions up to 1 GHz

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
TEST RECEIVER R&S	ESCS 30	100292	2021/9/1	2022/8/31
TEST RECEIVER R&S	ESCS 30	100276	2022/4/19	2023/4/18
Bi-log Broadband Antenna Schwarzbeck	VULB9168	9168-303	2021/10/29	2022/10/28
Pre_Amplifier HP	8447D	2944A08313	2022/2/16	2023/2/15
Preamplifier Agilent	8447D	2944A11062	2022/2/16	2023/2/15
Pre_Amplifier EMCI	EMC9135	980711	2022/3/19	2023/3/18
Coupling/Dcoupling Network Schwarzbeck	CDNE-M2	00097	2022/6/1	2023/5/31
Coupling/Dcoupling Network Schwarzbeck	CDNE-M3	00091	2022/6/1	2023/5/31
RF Coaxial Cable Pacific	8D-FB	Cable-ST2-01	2021/10/22	2022/10/21
Attenuator Mini-Circuits	UNAT-5+	PAD-ST2-01	2021/10/22	2022/10/21
ADT. Turn Table	TT100	0205	NA	NA
ADT. Tower	AT100	0205	NA	NA
Software BVADT	Radiated_V7.6.15. 9.5	NA	NA	NA

### Notes:

1. The test was performed in Linkou Open Site2 , The test site validated date: 2022/7/16 (NSA)
2. Tested Date: 2022/8/9

### 4.3 Radiated Emissions above 1 GHz

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer Agilent	E4446A	MY51100009	2022/6/27	2023/6/26
Spectrum Keysight	N9020B	MY60110438	2021/12/8	2022/12/7
Spectrum Keysight	N9020B	MY60112260	2022/5/21	2023/5/20
Test Receiver Agilent	N9038A	MY51210137	2022/6/9	2023/6/8
Pre-amplifier HP	8449B	3008A01292	2022/2/17	2023/2/16
Pre_Amplifier EMCI	EMC0126545	980076	2022/2/17	2023/2/16
Horn Antenna ETS-Lindgren	3117-PA	00215857	2021/11/14	2022/11/13
Horn Antenna EMCO	3115	6714	2021/11/14	2022/11/13
Pre_Amplifier EMCI	EMC184045B	980235	2022/2/17	2023/2/16
Horn Antenna Schwarzbeck	BBHA 9170	212	2021/10/13	2022/10/12
RF Coaxial Cable EM	EM102-KMKM-3.5 +1M	EM102-KMKM-3.5 +1M-02	2022/7/7	2023/7/6
Attenuator Mini-Circuits	BW-N4W5+	PAD-CH10-02	2022/7/7	2023/7/6
Attenuator Mini-Circuits	BW-K3-2W44+	PAD-CH7-03	2022/7/7	2023/7/6
Band Pass Filter MICRO-TRONICS	BRM17690	005	2022/5/26	2023/5/25
Notch Filter MICRO-TRONICS	BRC50703-01	010	2022/5/26	2023/5/25
Fix tool for Boresight antenna tower BV	BAF-01	9	NA	NA
Turn Table & Tower Max Full	MF7802	MF780208216	NA	NA
Software BVADT	Radiated_V8.7.08	NA	NA	NA

Notes:

1. The test was performed in Linkou 966 Chamber 3 (CH 10).
2. Tested Date: 2022/8/10

## 5 Limits of Test Items

### 5.1 Conducted Emissions from Power Ports

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.2 Radiated Emissions up to 1 GHz

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6		
230-960			47	37
960-1000	49.5	43.5		

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40	50.5	40.5
88-216	54	43.5		
216-230	56.9	46		
230-960			57.5	47.5
960-1000	60	54		

- Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 3. QP detector shall be applied if not specified.

### 5.3 Radiated Emissions above 1 GHz

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 49.5	Avg: 43.5	Not defined	Not defined
Above 3000	Peak: 69.5	Peak: 63.5	Not defined	Not defined

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 60	Avg: 54	Avg: 56 Peak: 76	Avg: 50 Peak: 70
Above 3000	Peak: 80	Peak: 74	Avg: 60 Peak: 80	Avg: 54 Peak: 74

- Notes:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
  3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Frequency Range (For unintentional radiators)


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

## 6 Test Arrangements

### 6.1 Conducted Emissions from Power Ports

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the the floor standing EUT shall be insulated (by insulation of 12 mm) from the horizontal reference ground plane. The EUT is placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units are connected to the power mains through another LISN. They provide coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

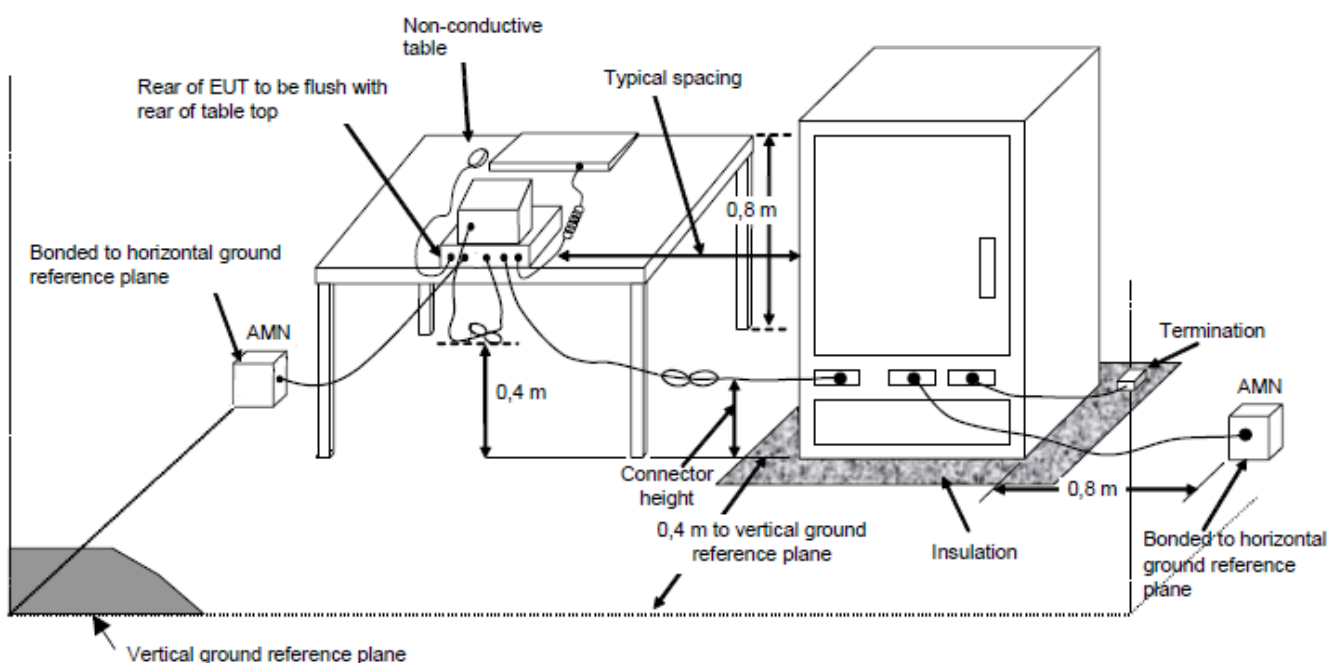


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

## 6.2 Radiated Emissions up to 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the the floor standing EUT shall be insulated (by insulation of 12 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

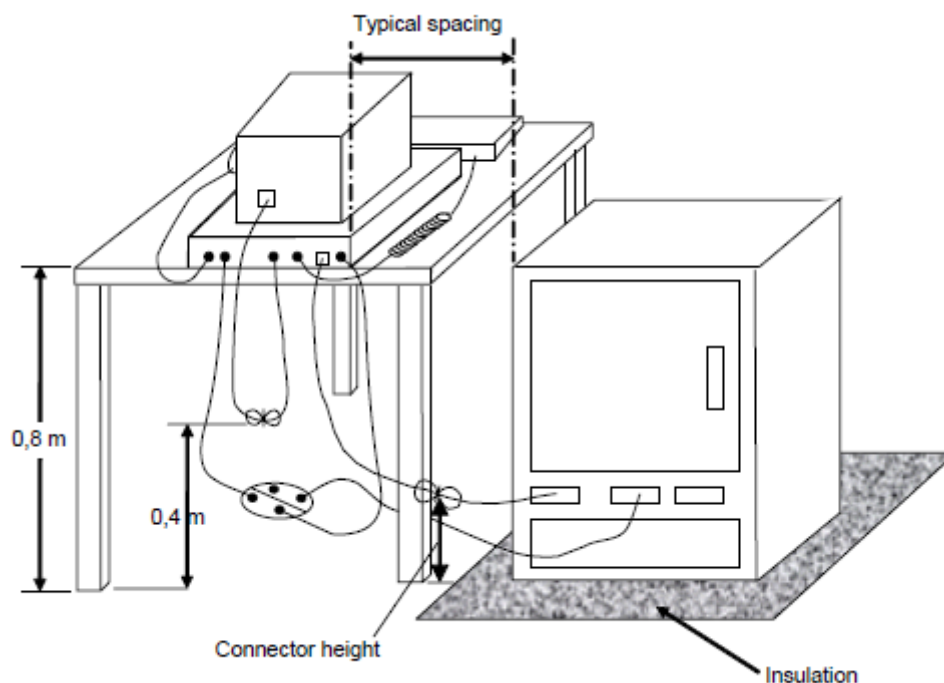


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.



### 6.3 Radiated Emissions above 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the the floor standing EUT shall be insulated (by insulation of 12 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set  $d = 3$  meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

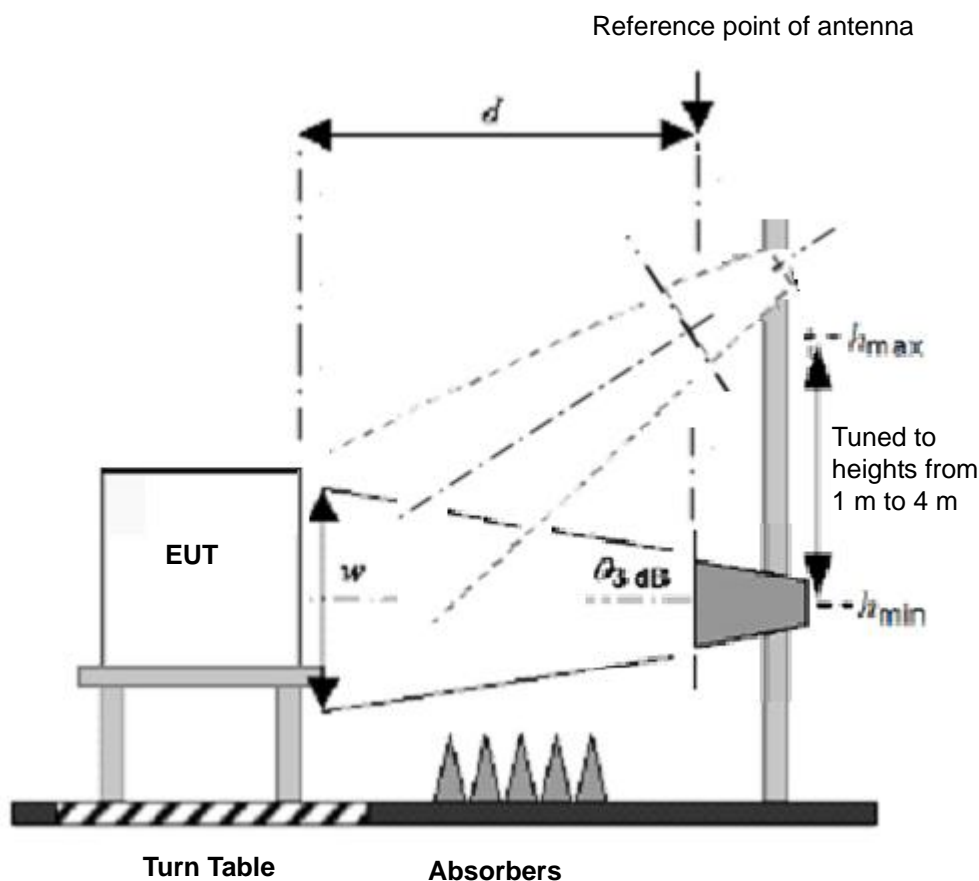

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 7 Test Results of Test Item

### 7.1 Conducted Emissions from Power Ports

#### Mode A


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	26°C, 73% RH
Tested by	John Liao		

#### Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16526	9.64	41.52	35.20	51.16	44.84	79.00	66.00	-27.84	-21.16
2	0.23962	9.65	41.35	35.36	51.00	45.01	79.00	66.00	-28.00	-20.99
3	0.94196	9.69	32.20	25.86	41.89	35.55	73.00	60.00	-31.11	-24.45
<b>4</b>	<b>1.55206</b>	<b>9.72</b>	<b>34.32</b>	<b>30.52</b>	<b>44.04</b>	<b>40.24</b>	<b>73.00</b>	<b>60.00</b>	<b>-28.96</b>	<b>-19.76</b>
5	4.05719	9.79	30.20	25.66	39.99	35.45	73.00	60.00	-33.01	-24.55
6	19.97913	9.93	26.35	23.20	36.28	33.13	73.00	60.00	-36.72	-26.87

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

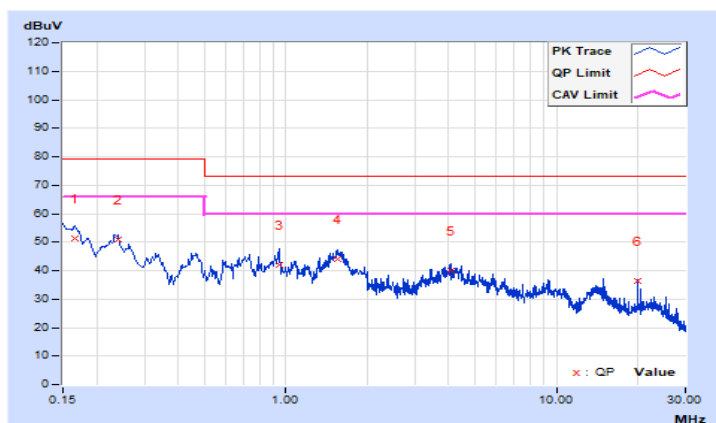


<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	26°C, 73% RH
<b>Tested by</b>	John Liao		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15001	9.65	43.36	36.20	53.01	45.85	79.00	66.00	-25.99	-20.15
2	0.47852	9.67	35.32	29.65	44.99	39.32	79.00	66.00	-34.01	-26.68
3	0.94196	9.70	34.20	28.10	43.90	37.80	73.00	60.00	-29.10	-22.20
4	1.62637	9.73	36.95	30.25	46.68	39.98	73.00	60.00	-26.32	-20.02
5	4.15105	9.80	30.20	26.85	40.00	36.65	73.00	60.00	-33.00	-23.35
6	19.98303	10.04	25.12	24.36	35.16	34.40	73.00	60.00	-37.84	-25.60

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

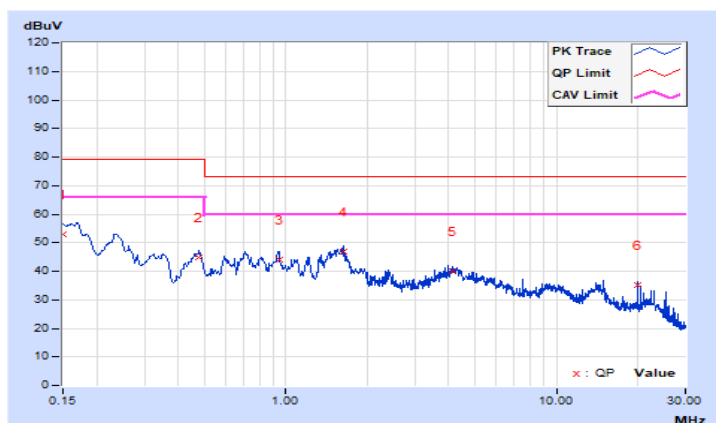


Mode B

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	240 Vac, 60 Hz	Environmental Conditions	26°C, 73% RH
Tested by	John Liao		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17147	9.64	40.12	34.25	49.76	43.89	79.00	66.00	-29.24	-22.11
2	0.25126	9.65	38.23	31.20	47.88	40.85	79.00	66.00	-31.12	-25.15
3	0.60169	9.68	35.32	29.10	45.00	38.78	73.00	60.00	-28.00	-21.22
4	0.91848	9.69	37.20	27.96	46.89	37.65	73.00	60.00	-26.11	-22.35
5	1.60681	9.72	34.23	30.15	43.95	39.87	73.00	60.00	-29.05	-20.13
6	19.97949	9.93	24.85	20.96	34.78	30.89	73.00	60.00	-38.22	-29.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

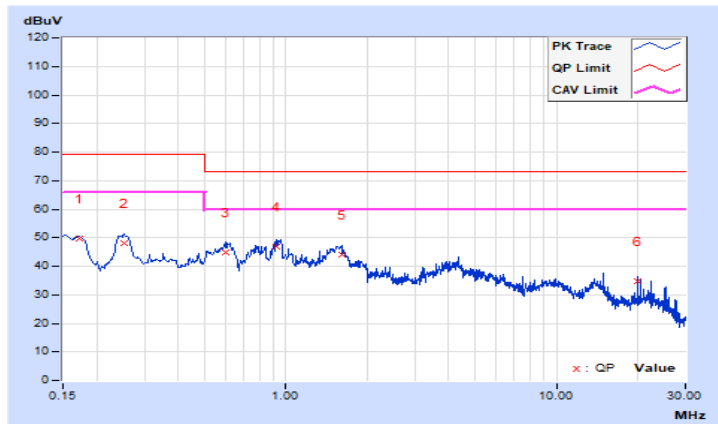


<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	240 Vac, 60 Hz	<b>Environmental Conditions</b>	26°C, 73% RH
<b>Tested by</b>	John Liao		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.25459	9.65	40.23	32.85	49.88	42.50	79.00	66.00	-29.12	-23.50
2	0.60560	9.68	34.52	28.36	44.20	38.04	73.00	60.00	-28.80	-21.96
3	0.96155	9.70	36.85	30.45	46.55	40.15	73.00	60.00	-26.45	-19.85
4	1.61855	9.73	35.23	30.25	44.96	39.98	73.00	60.00	-28.04	-20.02
5	3.87337	9.80	29.63	26.32	39.43	36.12	73.00	60.00	-33.57	-23.88
6	19.98302	10.04	24.32	22.06	34.36	32.10	73.00	60.00	-38.64	-27.90

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

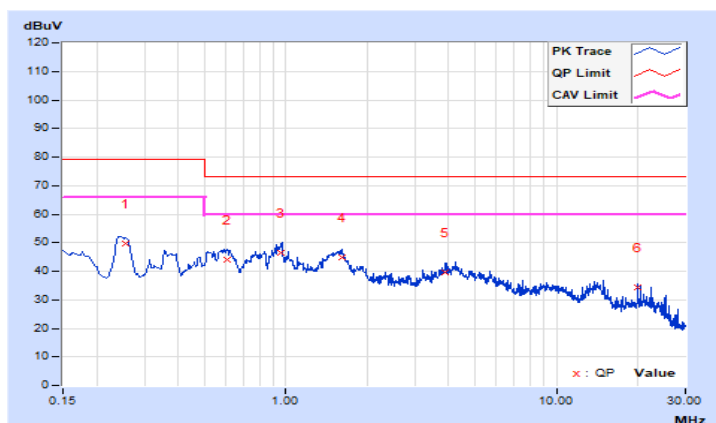

## 7.2 Radiated Emissions up to 1 GHz


### Mode A

Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Tested By	Paul Chen	Environmental Conditions	32°C, 75% RH

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.48	31.39 QP	40.00	-8.61	4.00 H	286	49.49	-18.10
2	85.25	28.40 QP	40.00	-11.60	4.00 H	98	51.87	-23.47
3	125.00	27.74 QP	40.00	-12.26	4.00 H	95	46.44	-18.70
4	186.43	32.26 QP	40.00	-7.74	4.00 H	155	51.44	-19.18
5	250.01	34.62 QP	47.00	-12.38	3.72 H	225	52.16	-17.54
6	350.14	35.20 QP	47.00	-11.80	3.07 H	121	49.79	-14.59
7	425.20	33.89 QP	47.00	-13.11	2.15 H	279	46.16	-12.27
8	525.20	31.58 QP	47.00	-15.42	1.82 H	263	41.43	-9.85
9	662.48	36.77 QP	47.00	-10.23	1.00 H	254	43.52	-6.75

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

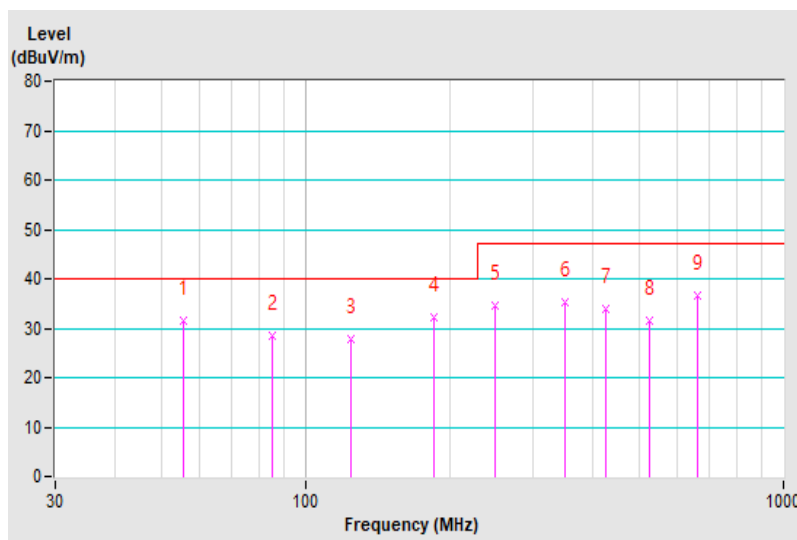


<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP), 120 kHz
<b>Tested By</b>	Paul Chen	<b>Environmental Conditions</b>	32°C, 75% RH

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.47	36.48 QP	40.00	-3.52	1.34 V	350	54.52	-18.04
2	84.81	32.53 QP	40.00	-7.47	1.71 V	250	55.95	-23.42
3	125.00	33.54 QP	40.00	-6.46	1.00 V	108	52.24	-18.70
4	168.16	28.75 QP	40.00	-11.25	1.00 V	227	45.76	-17.01
5	181.78	31.89 QP	40.00	-8.11	1.00 V	233	50.49	-18.60
6	249.99	31.69 QP	47.00	-15.31	1.00 V	225	49.23	-17.54
7	272.37	33.12 QP	47.00	-13.88	1.00 V	134	49.71	-16.59
8	375.01	30.03 QP	47.00	-16.97	1.00 V	117	43.79	-13.76
9	662.48	34.35 QP	47.00	-12.65	3.36 V	213	41.10	-6.75

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

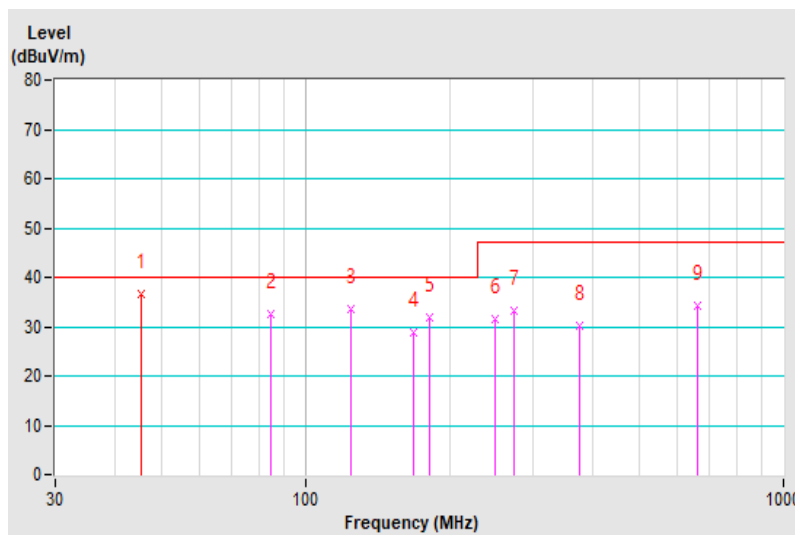

### 7.3 Radiated Emissions above 1 GHz


#### Mode A

<b>Frequency Range</b>	1GHz ~ 18GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Tested By</b>	Adam Chen	<b>Environmental Conditions</b>	25°C, 72% RH

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1066.46	51.68 PK	80.00	-28.32	2.05 H	311	56.32	-4.64
2	1066.46	34.05 AV	60.00	-25.95	2.05 H	311	38.69	-4.64
3	1324.91	54.46 PK	80.00	-25.54	1.79 H	51	58.29	-3.83
4	1324.91	37.25 AV	60.00	-22.75	1.79 H	51	41.08	-3.83
5	4800.17	47.59 PK	80.00	-32.41	1.00 H	341	41.37	6.22
6	<b>4800.17</b>	<b>38.72 AV</b>	<b>60.00</b>	<b>-21.28</b>	<b>1.00 H</b>	<b>341</b>	<b>32.50</b>	<b>6.22</b>

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

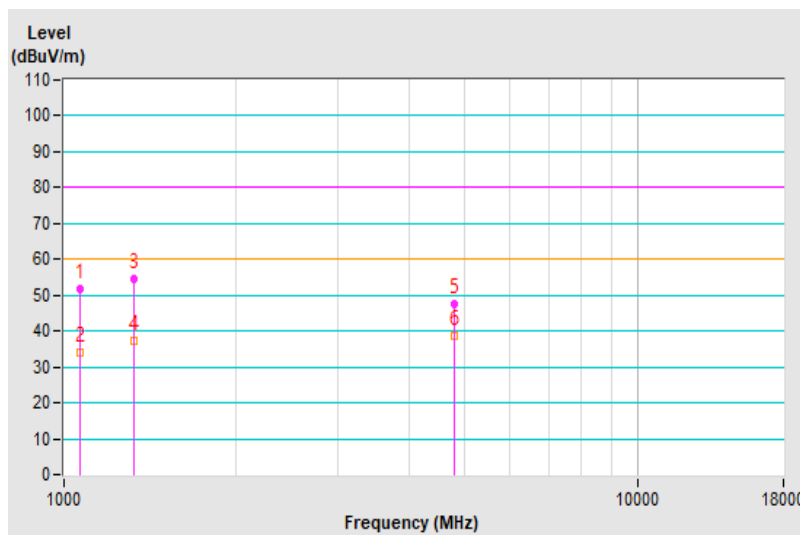




<b>Frequency Range</b>	1GHz ~ 18GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Tested By</b>	Adam Chen	<b>Environmental Conditions</b>	25°C, 72% RH

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1324.92	56.07 PK	80.00	-23.93	2.67 V	35	59.90	-3.83
2	1324.92	35.12 AV	60.00	-24.88	2.67 V	35	38.95	-3.83
3	2400.15	51.39 PK	80.00	-28.61	2.32 V	11	51.31	0.08
4	2400.15	35.31 AV	60.00	-24.69	2.32 V	11	35.23	0.08
5	4800.07	49.03 PK	80.00	-30.97	2.07 V	170	42.81	6.22
6	4800.07	38.41 AV	60.00	-21.59	2.07 V	170	32.19	6.22

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

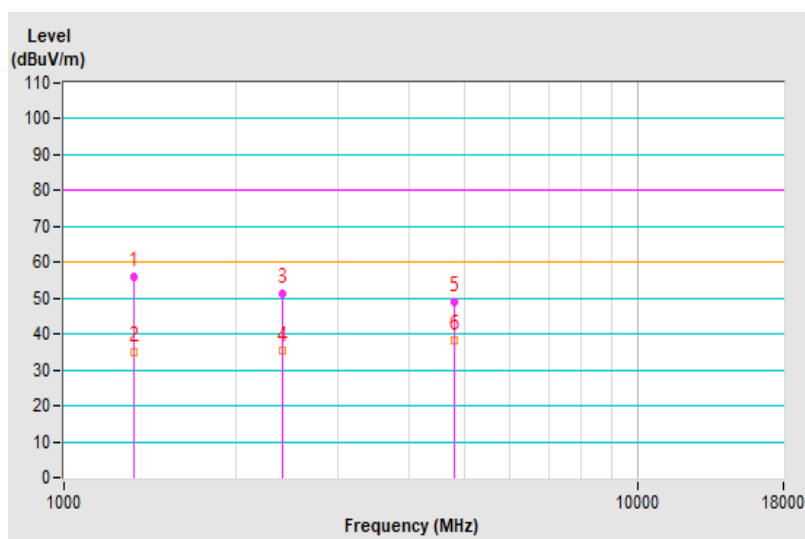

## 8 Pictures of Test Arrangements

### 8.1 Conducted Emissions from Power Ports

#### Mode A



Mode B







## 8.2 Radiated Emissions up to 1 GHz

### Mode A



### 8.3 Radiated Emissions above 1 GHz

#### Mode A

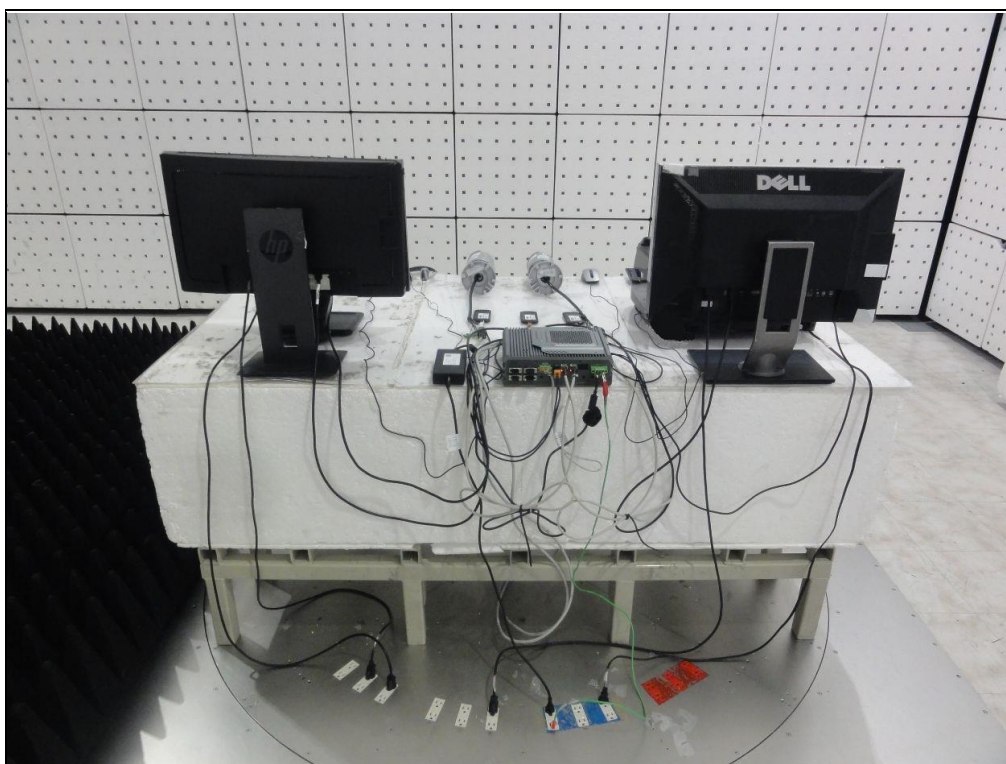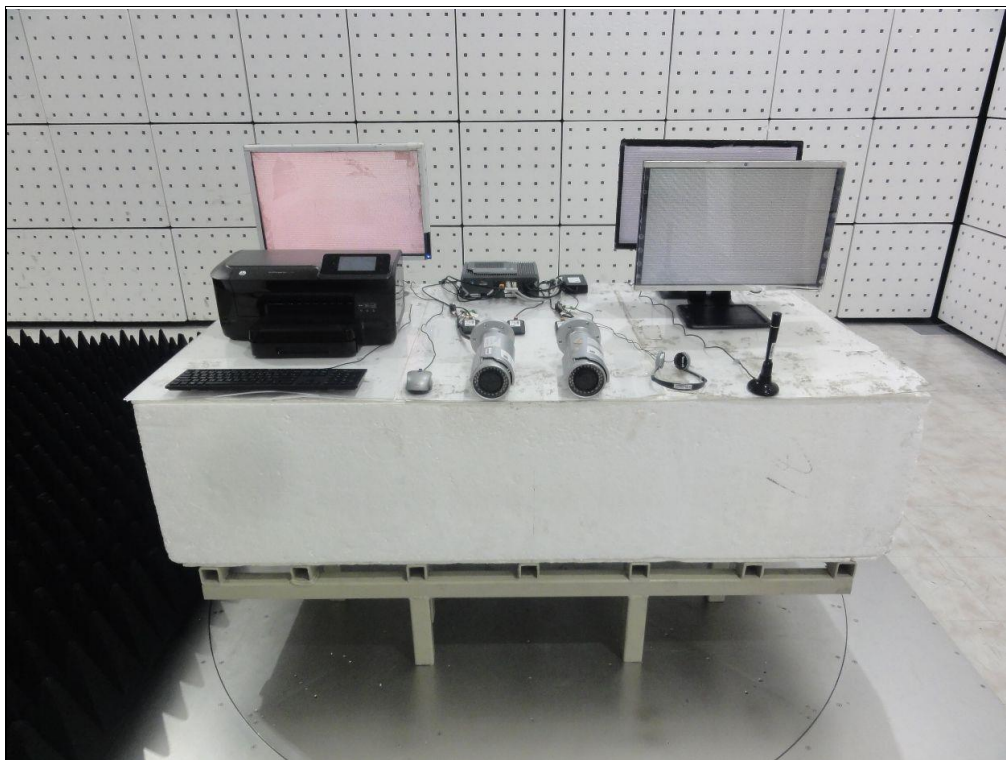

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---