

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** EN 55032:2015 +A11:2020, Class A  
EN 61000-3-2:2014 (Not Applicable)  
EN IEC 61000-3-2:2019 +A1:2021 (Not Applicable)  
EN 61000-3-3:2013 +A2:2021 (Not Applicable)  
EN 55035:2017 +A11:2020

**Report No.:** CEBDBO-WTW-P22070677

**Model No.:** PE-2004MX

**Received Date:** 2022/7/22

**Test Date:** 2022/8/11 ~ 2022/8/27

**Issued Date:** 2022/9/21

**Applicant:** Vecow Co., Ltd.

**Address:** 3F., No.10, Jiankang Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Approved by:** Jim Hsiang, **Date:** 2022/9/21  
Jim Hsiang / Associate Technical Manager

This test report consists of 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vivian Chen / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Performance Criteria .....	7
2.2 Measurement Uncertainty .....	9
2.3 Supplementary Information .....	9
<b>3 General Information</b> .....	<b>10</b>
3.1 Description of EUT .....	10
3.2 Primary Clock Frequencies of Internal Source .....	10
3.3 Features of EUT .....	10
3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode .....	10
3.5 Test Program Used and Operation Descriptions .....	11
3.6 Connection Diagram of EUT and Peripheral Devices .....	12
3.7 Configuration of Peripheral Devices and Cable Connections .....	14
<b>4 Test Instruments</b> .....	<b>17</b>
4.1 Conducted Emissions from Power Ports .....	17
4.2 Conducted Emissions from Wired Network Ports .....	18
4.3 Radiated Emissions up to 1 GHz .....	19
4.4 Radiated Emissions above 1 GHz .....	20
4.5 Electrostatic Discharges (ESD) .....	20
4.6 Radio Frequency Electromagnetic Field (RS) .....	21
4.7 Fast Transients Common Mode (EFT) .....	22
4.8 Radio Frequency Common Mode (CS) .....	22
4.9 Power Frequency Magnetic Field (PFMF) .....	23
<b>5 Limits of Test Items</b> .....	<b>24</b>
5.1 Conducted Emissions from Power Ports .....	24
5.2 Conducted Emissions from Wired Network Ports .....	24
5.3 Radiated Emissions up to 1 GHz .....	24
5.4 Radiated Emissions above 1 GHz .....	25
5.5 General immunity requirements .....	26
<b>6 Test Arrangements</b> .....	<b>28</b>
6.1 Conducted Emissions from Power Ports .....	28
6.2 Conducted Emissions from Wired Network Ports .....	29
6.3 Radiated Emissions up to 1 GHz .....	32
6.4 Radiated Emissions above 1 GHz .....	33
6.5 Electrostatic Discharges (ESD) .....	34
6.6 Radio Frequency Electromagnetic Field (RS) .....	36
6.7 Fast Transients Common Mode (EFT) .....	37
6.8 Radio Frequency Common Mode (CS) .....	38
6.9 Power Frequency Magnetic Field (PFMF) .....	40
<b>7 Test Results of Test Item</b> .....	<b>41</b>
7.1 Conducted Emissions from Power Ports .....	41
7.2 Conducted Emissions from Wired Network Ports .....	45
7.3 Radiated Emissions up to 1 GHz .....	47
7.4 Radiated Emissions above 1 GHz .....	49
7.5 Electrostatic Discharges (ESD) .....	51
7.6 Radio Frequency Electromagnetic Field (RS) .....	56
7.7 Fast Transients Common Mode (EFT) .....	56
7.8 Radio Frequency Common Mode (CS) .....	57
7.9 Power Frequency Magnetic Field (PFMF) .....	57
<b>8 Pictures of Test Arrangements</b> .....	<b>58</b>
8.1 Conducted Emissions from Power Ports .....	58



8.2	Conducted Emissions from Wired Network Ports .....	59
8.3	Radiated Emissions up to 1 GHz .....	60
8.4	Radiated Emissions above 1 GHz.....	61
8.5	Electrostatic Discharges (ESD) .....	62
8.6	Radio Frequency Electromagnetic Field (RS).....	63
8.7	Fast Transients Common Mode (EFT) .....	64
8.8	Radio Frequency Common Mode (CS).....	65
8.9	Power Frequency Magnetic Field (PFMF).....	65
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>66</b>



## Release Control Record

Issue No.	Description	Date Issued
CEBDBO-WTW-P22070677	Original release.	2022/9/21

## 1 Certificate

**Product:** PCI Express PoE+ Expansion Card

**Brand:** Vecow

**Test Model:** PE-2004MX

**Sample Status:** Engineering sample

**Applicant:** Vecow Co., Ltd.

**Test Date:** 2022/8/11 ~ 2022/8/27

**Standard:** EN 55032:2015 +A11:2020, Class A  
EN 61000-3-2:2014 (Not Applicable)  
EN IEC 61000-3-2:2019 +A1:2021 (Not Applicable)  
EN 61000-3-3:2013 +A2:2021 (Not Applicable)  
EN 55035:2017 +A11:2020

**Measurement procedure:** EN 61000-4-2:2009 / IEC 61000-4-2:2008 ED. 2.0  
EN 61000-4-3:2006 +A1:2008 +A2:2010 / IEC 61000-4-3:2010 ED. 3.2  
EN IEC 61000-4-3:2020 / IEC 61000-4-3:2020 ED. 4.0  
EN 61000-4-4:2012 / IEC 61000-4-4:2012 ED. 3.0  
EN 61000-4-5:2014 +A1:2017 / IEC 61000-4-5:2017 ED. 3.1 (Not Applicable)  
EN 61000-4-6:2014 +AC:2015 / IEC 61000-4-6:2013 ED. 4.0  
EN 61000-4-8:2010 / IEC 61000-4-8:2009 ED. 2.0  
EN 61000-4-11:2004 +A1: 2017 / IEC 61000-4-11:2017 ED. 2.1 (Not Applicable)  
EN IEC 61000-4-11:2020 / IEC 61000-4-11:2020 ED. 3.0 (Not Applicable)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

## 2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces and evaluated functions are as follows:

Standard	Test Item	Result	Remark
EN 55032	Conducted Emissions from Power Ports	Pass	Minimum passing Class A margin is -24.37 dB at 12.57561 MHz
EN 55032	Conducted Emissions from Wired Network Ports	Pass	Minimum passing Class A margin is -15.02 dB at 12.57561 MHz
EN 55032	Radiated Emissions up to 1 GHz	Pass	Minimum passing Class A margin is -6.14 dB at 324.06 MHz
EN 55032	Radiated Emissions above 1 GHz	Pass	Minimum passing Class A margin is -6.70 dB at 5400.08 MHz
IEC 61000-4-2	Electrostatic Discharges (ESD)	Pass	For EN 55035 Performance Criteria B
IEC 61000-4-3	Radio Frequency Electromagnetic Field (RS)	Pass	For EN 55035 Performance Criteria A
IEC 61000-4-4	Fast Transients Common Mode (EFT)	Pass	For EN 55035 Performance Criteria A
IEC 61000-4-6	Radio Frequency Common Mode (CS)	Pass	For EN 55035 Performance Criteria A
IEC 61000-4-8	Power Frequency Magnetic Field (PFMF)	Pass	For EN 55035 Performance Criteria A

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## 2.1 Performance Criteria

### General Performance Criteria

These criteria shall be used during the testing of primary functions where no specified in the normative annexes of EN 55035 is applicable.

#### Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

### Product Specific Performance criteria for network functions

Equipment that provides these functions transmits and receives data through ports such as an analogue/digital data port. The networking functions are just like network switching and routing ; data transmission ; supervisory...etc.

The particular performance criteria which are specified in the normative annexes of CISPR 35/ EN 55035 take precedence over the corresponding parts of the general performance criteria.

#### Performance criterion A

Where relevant, during the application of the test the network function shall, as a minimum, operate ensuring that:

- established connections shall be maintained throughout the application of the test;
- no change of operational state or corruption of stored data occurs;
- no increase in error rate above the figure defined by the manufacturer occurs. The manufacturer should select the most appropriate performance measurement criteria for the product or system, for example bit error rate, block error rate;
- no request for retry above the figure defined by the manufacturer;
- the data transmission rate does not reduce below the figure defined by the manufacturer;
- no protocol failure occurs;
- other verifications are described in F.3.3.1 of CISPR 35/ EN 55035.

### Performance criterion B

Established connections shall be maintained throughout the test, or shall self-recover in a way and timescale that is imperceptible to the user.

The error rate, request for retry and data transmission rates may be degraded during the application of the test. Degradation of the performance as described in criterion A is permitted, provided that the normal operation of the EUT is self-recoverable to the condition established prior to the application of the test.

Where required, as defined in Clause 5 of CISPR 35/ EN 55035, the acceptable operation of the function shall be verified at the completion of the test as described in Table H.1 of CISPR 35/ EN 55035, by confirming the following:

- the EUT's ability to establish a connection,
- the EUT's ability to clear a connection.

During surge testing disconnection is allowed on the analogue/digital data port being tested.

If the EUT is a supervisory equipment, it shall not impact the normal operation of the network being monitored. In addition, any supervisory functions impacted during the period of the test shall return to the state prior to the test. Elements to consider include: alarms, signalling lamps, printer output, network traffic rates, network monitoring.

### Performance criterion C

Degradation of performance as described in criteria A and B is permitted provided that the normal operation of the EUT is self-recoverable to the condition immediately before the application of the test, or can be restored after the test by the operator.

### Product Specific Performance Criteria for xDSL

The particular performance criteria which are specified in the normative annexes of CISPR 35/ EN 55035 take precedence over the corresponding parts of the general performance criteria.

### Performance criterion A

#### Applicable for the test requirement defined in table clause 2.1 of EN 55035

During the swept frequency test the established connection shall be maintained throughout the testing and the information transferred without any additional reproducible errors or loss of synchronisation. If a degradation in performance is observed and the system is adaptive, for example has the capability to automatically retrain in the presence of an interfering signal, then for conducted immunity tests only, the following procedure shall be followed:

- a) For each range of interfering frequencies in which degradation in performance is observed, three frequencies (beginning, middle and end) shall be identified.
- b) At each of the frequencies identified in step a), the interfering signal shall be turned on and the system is allowed to retrain.
- c) If the system is able to retrain and then functions correctly for a dwell time of at least 60 seconds without any additional reproducible errors or loss of synchronisation, then the performance level of the system is considered acceptable.
- d) The frequencies identified in step a) and the data rates achieved in step b) shall be recorded in the test report.

#### Applicable for the test requirement defined in table clause 2.2 of EN 55035

It is important that the modems are able to train in the presence of repetitive impulsive noise and minimize disruption to the end-user where a repetitive impulsive noise source starts after the link has synchronized. Therefore the following procedure and performance criteria shall apply.

The manufacturer shall select the class of impulsive noise protection (INP) to be used for the immunity test and should state this information in the technical documentation and in the test report. The maximum delay shall be set to 8 ms.

**In the absence of impulsive noise:** The modem shall operate without retraining at its target noise margin with a bit rate value depending on the line attenuation and the stationary noise being present on the line. (The actual value will be between the minimum and maximum bit rate values programmed in the port).

The impulsive noise source shall then be applied at the required test level.

**With the impulsive noise applied:** The modem shall operate without retraining and without SES at the bit rate established prior to the application of the impulsive noise. No extra CRC errors shall occur due to the impulsive noise. After the test, the noise margin value shall return to the target noise margin.



## Performance criterion B

### Applicable for the test requirement defined in table clause 2.3 of EN 55035

Modems shall withstand the occurrence of isolated impulsive noise events. The performance criteria defined in below Table shall be applied.

Impulse duration (ms)	Performance criteria
0.24	The application of the impulse shall not cause the xDSL link to lose synchronisation. No CRC errors are permitted.
10	The application of the 5 impulses shall result in less than 75 CRC errors and shall not cause the link to lose synchronisation.
300	The application of the impulse shall not cause the xDSL link to lose synchronisation.

### Applicable for the test requirements defined in table clauses 2.5 and 4.5 of EN 55035

For application of this test to the xDSL port, a repetition rate of 100 kHz (burst length 0.75 ms) shall be used.

Degradation of the performance as described in criterion A is permitted in that errors are acceptable during the application of the test. However the application of the test shall not cause the system to lose the established connection or re-train. At the cessation of the test the system shall operate in the condition established prior to the application of the test without user intervention.

After the application of the EFT/B tests to the xDSL or AC mains port, the CRC error count shall not have increased by more than 600 when compared to the count prior to the application of the test.

### Performance criterion C

Degradation of the performance as described in criteria A and B is permitted provided that the normal operation of the EUT is self-recoverable to the condition established prior to application of the test or can be restored after the test by the operator.

## 2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)	Maximum allowable uncertainty (±)
Conducted Emissions from Power Ports	9 kHz ~ 30 MHz	3.00 dB	3.4 dB ( $U_{CISPR}$ )
Conducted Emissions from Wired Network Ports	150 kHz ~ 30 MHz	ISN Cat3 : 3.48 dB ISN Cat5 : 3.94 dB ISN Cat6 : 4.44 dB Current Probe : 1.94 dB Voltage Probe : 3.02 dB Coaxial : 2.48 dB	5.0 dB ( $U_{CISPR}$ ) using AAN 2.9 dB ( $U_{CISPR}$ ) using CP 3.9 dB ( $U_{CISPR}$ ) using CVP
Radiated Emissions up to 1 GHz	30 MHz ~ 1 GHz	3m : 5.64 dB 10m : 4.30 dB	6.3 dB ( $U_{CISPR}$ )
Radiated Emissions above 1 GHz	1 GHz ~ 6 GHz	4.64 dB	5.2 dB ( $U_{CISPR}$ )
	6 GHz ~ 18 GHz	4.60 dB	-

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

## 2.3 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 Description of EUT

Product	PCI Express PoE+ Expansion Card
Brand	Vecow
Test Model	PE-2004MX
Sample Status	Engineering sample
Operating Software	N/A
Power Supply Rating	DC from System
Accessory Device	N/A
Data Cable Supplied	N/A

#### 3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 2.5 GHz, provided by Vecow Co., Ltd., for detailed internal source, please refer to the manufacturer's specifications.

#### 3.3 Features of EUT

The tests reported herein were performed according to the method specified by Vecow Co., Ltd., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

Please refer to appendix of the report if the applicant has provided additional descriptions of the EUT.

#### 3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode

1. The EUT was pre-tested under operating and standby condition and the worst emission level was found under **operating condition**.
2. The EUT consumes power from System, which designed with AC power supply of 100-240Vac, 50-60Hz. For radiated emission evaluation, 230Vac/ 50Hz & 110Vac/ 60Hz had been covered during the pre-test. The worst radiated emission data was found at **110Vac/ 60Hz** and recorded in the applied test report.
3. Test modes are presented in the report as below.

Mode	Test Condition	Input Power (System)
Conducted emission test		
A	Full System	110Vac/ 60Hz
B		230Vac/ 50Hz
Conducted Emissions from Wired network ports test		
A	Full System –LAN Card PoE 1 (Speed: 100Mbps)	230Vac/ 50Hz
B	Full System –LAN Card PoE 4 (Speed: 100Mbps)	
The idle mode of conducted emission test at telecom port was pre-tested based on the worst case of link mode. Due to emissions of idle mode being very low compared to link mode, only the link mode data were presented in the test report.		
Radiated emission test		
A	Full System	110Vac/ 60Hz
Immunity tests		
A	Full System	230Vac/ 50Hz

### 3.5 Test Program Used and Operation Descriptions

#### Emission tests:


- a. Installed the EUT into Server.
- b. Turned on the power of all equipments.
- c. Server ran a test program to enable all functions.
- d. Server read and wrote messages to/ from SSD, and ext. HDDs.
- e. IP camera captured video / audio signal to Server.
- f. Server sent and received ping messages to/ from the Notebook PCs (kept in a remote area) via two STP LAN cables (10m each).
- g. Server sent “color bars with moving element” messages to ext. LCD monitors. Then they displayed “color bars with moving element” messages on their screens simultaneously.
- h. Server sent “1kHz audio” signal to earphone.
- i. Server sent messages to printer and printed them out.
- j. Steps c-i were repeated.

#### Immunity tests:


- a. Installed the EUT into Server.
- b. Turned on the power of all equipments.
- c. Server ran a test program to enable all functions.
- d. Server read and wrote messages to/ from SSD, and USB Flash.
- e. IP camera captured video / audio signal to Server.
- f. Server sent and received ping messages to/ from the Notebook PCs (kept in a remote area) via two STP LAN cables (10m each).
- g. Server sent “color bars with moving element” messages to ext. LCD monitors. Then they displayed “color bars with moving element” messages on their screens simultaneously.
- h. Server sent audio signal to speaker.
- i. Steps c-h were repeated.

### 3.6 Connection Diagram of EUT and Peripheral Devices

Emission tests:

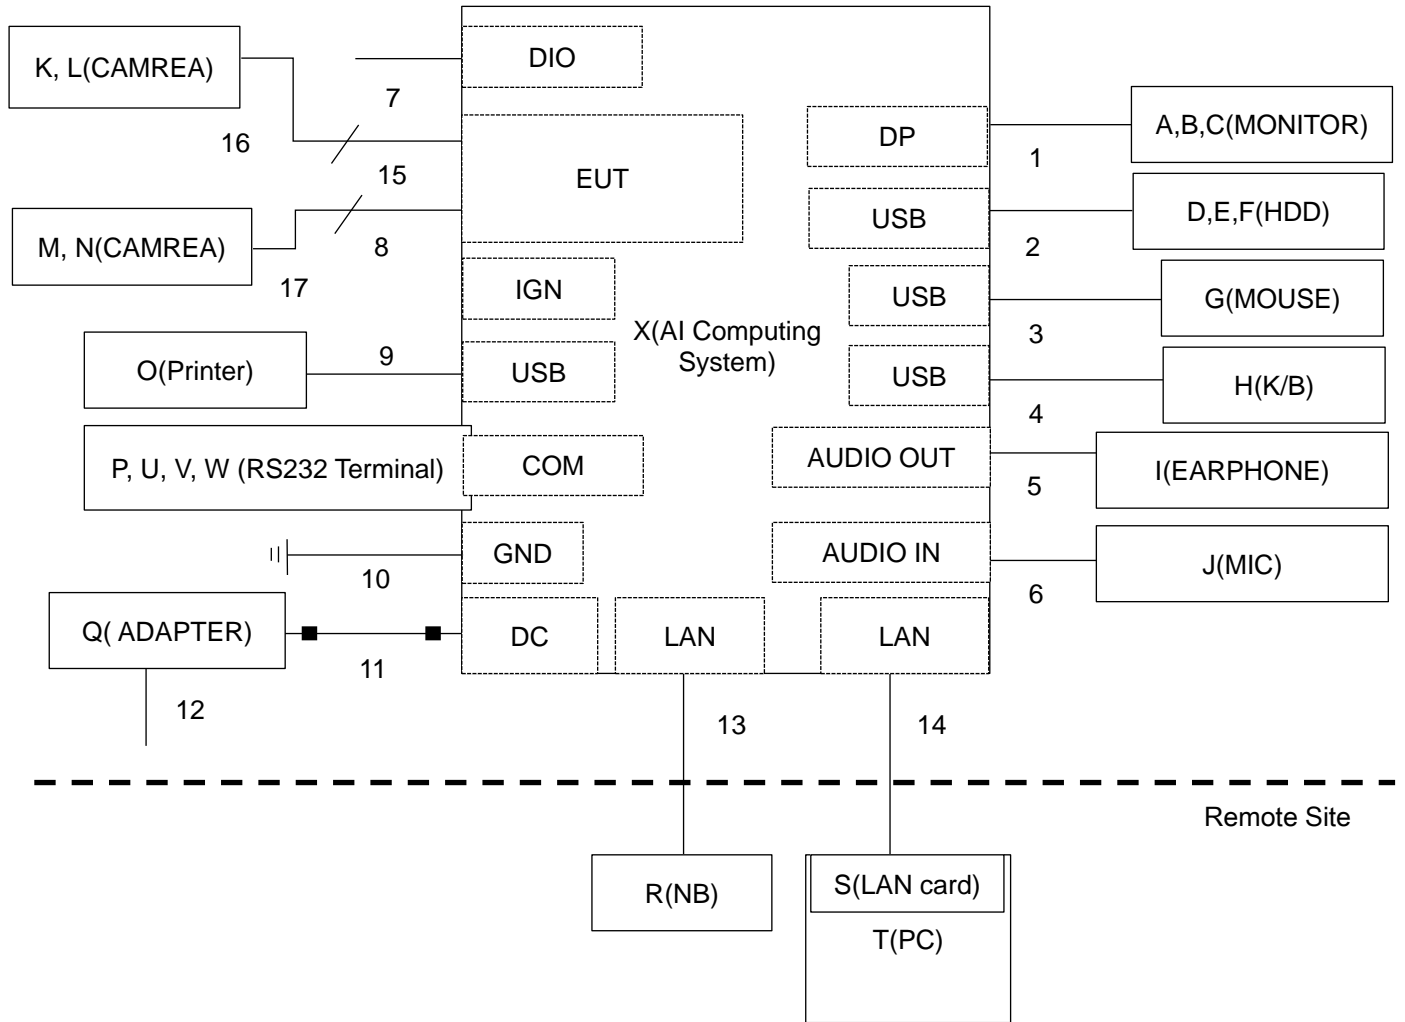

Immunity tests:

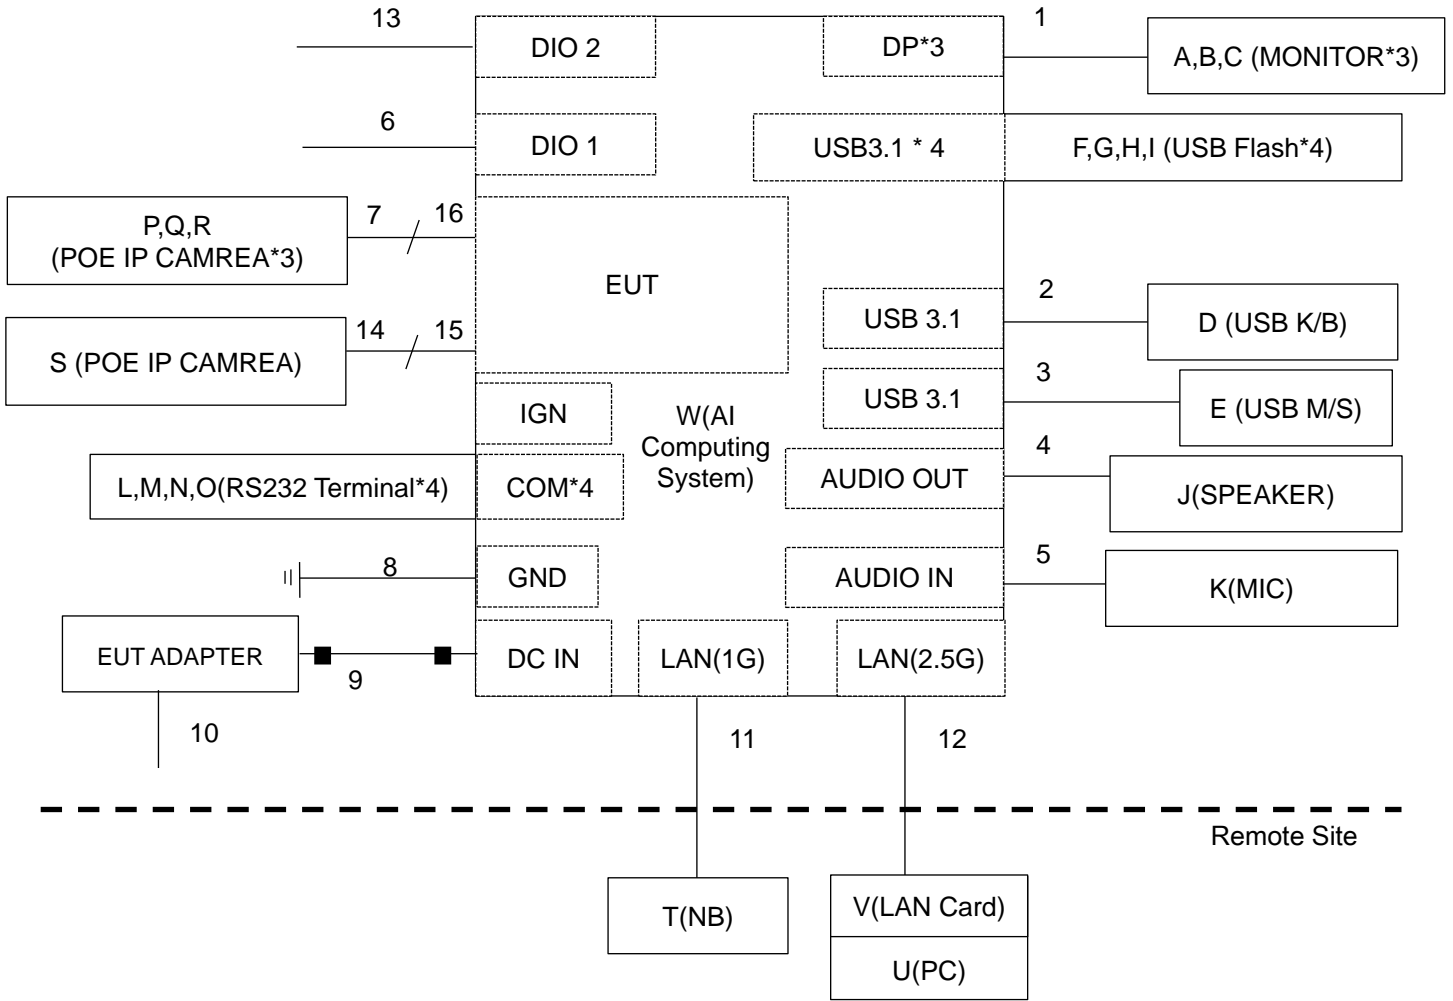

### 3.7 Configuration of Peripheral Devices and Cable Connections

Emission tests:

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Monitor	ASUS	VG289Q	M1LMTF385740	NA	M1-010634
B	Monitor	ASUS	VG289Q	M1LMTF385742	NA	M1-010635
C	Monitor	ASUS	VG289Q	M1LMTF385832	NA	M1-010637
D	USB 3.1 SSD	Crucial	CT500X8SSD9	1941E320114D	NA	H4-010856
E	USB 3.1 SSD	Crucial	CT500X8SSD9	1943E3201B6D	NA	H4-010859
F	USB 3.1 SSD	Crucial	CT500X8SSD9	1940E3200CFB	NA	H4-010849
G	USB Mouse	DELL	MOCZUL	CN-049TWY- PRC00-77B-007E	NA	M4-010884
H	USB Keyboard	Dell	KB216t	CN-0W33XP- LO300-7CL-1909	NA	K1-010798
I	EARPHONE	PHILIPS	SBC HL145	N/A	NA	H2-010180
J	Microphone	E-books	E-EPB099	N/A	NA	M5-010144
K	IP CAMARA	3MP	MBL030A-ORZ0310	NA	DOC	Supplied by applicant
L	IP CAMARA	3MP	MBL030A-ORZ0310	NA	DOC	Supplied by applicant
M	IP CAMARA	3MP	MBL030A-ORZ0310	NA	DOC	Supplied by applicant
N	IP CAMARA	3MP	MBL030A-ORZ0310	NA	DOC	Supplied by applicant
O	Printer	HP	HP Officejet Pro 251dW	NA	B94SDGOB1191	Provided by Lab
P	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
Q	ADAPTER	LITEON	PA-1331-92E	N/A	NA	Supplied by applicant
R	Laptop	LENOVO	T480	PF1EZSAW	NA	N1-010484
S	10G LAN card	ASUS	XG-C100C	NA	DoC	Provided by Lab
T	PC	DELL	3010 SF	1JWQS02	NA	Provided by Lab
U	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
V	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
W	RS232 Terminal	N/A	NA	N/A	NA	Supplied by applicant
X	AI Computing System	Vecow	RCX-2750R-PEG	NA	NA	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DP cable	3	1.8	Yes	0	Provided by Lab
2	USB Type A to C cable	3	1	Yes	0	Provided by Lab
3	USB 2.0 cable	1	1.8	Yes	0	Provided by Lab
4	USB 2.0 cable	1	1.8	Yes	0	Provided by Lab
5	Audio (3.5") cable	1	1.2	No	0	Provided by Lab
6	Audio (3.5") cable	1	2	No	0	Provided by Lab
7	DIO cable	2	1	No	0	Provided by Lab
8	RJ45 (Cat. 5e) cable	2	2	Yes	0	Supplied by applicant
9	USB cable	1	1.5	Yes	0	Provided by Lab
10	GND (PE) cable	1	1.5	No	0	Provided by Lab
11	DC power cable	1	1	No	2	Supplied by applicant
12	AC power cable	1	1.8	No	0	Accessory of EUT
13	RJ45 (Cat. 5e) cable	1	10	Yes	0	Provided by Lab
14	RJ45 (Cat. 5e) cable	1	10	Yes	0	Provided by Lab
15	RJ45 (Cat. 5e) cable	2	1	Yes	0	Supplied by applicant
16	RJ45 (Cat. 5e) cable	2	0.1	Yes	0	Supplied by applicant
17	RJ45 (Cat. 5e) cable	2	0.1	Yes	0	Supplied by applicant

**Immunity tests:**

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Monitor	Vita	VT-270JTG2	204270JTFE001	DoC	Provided by Lab
B	Monitor	DELL	P2415Qb	CN-OGTTPW-74261-662-OAGL	N/A	Provided by Lab
C	Monitor	DELL	P2415Qb	CN-OGTTPW-74261-662-OAAL	N/A	Provided by Lab
D	USB K/B	Microsoft	1576	N/A	N/A	Provided by Lab
E	USB M/S	Microsoft	MSK-1113(B)	N/A	N/A	Provided by Lab
F	USB 3.0 Dongle	HP	x750w	N/A	N/A	Provided by Lab
G	USB 3.0 Dongle	HP	x750w	N/A	N/A	Provided by Lab
H	USB 3.0 Dongle	HP	x750w	N/A	N/A	Provided by Lab
I	USB 3.0 Dongle	HP	x750w	N/A	N/A	Provided by Lab
J	Speaker	N/A	N/A	N/A	N/A	Provided by Lab
K	Microphone	V-COOL	M2/MIC01	N/A	N/A	Provided by Lab
L	RS232 Terminal	N/A	N/A	N/A	N/A	Supplied by applicant
M	RS232 Terminal	N/A	N/A	N/A	N/A	Supplied by applicant
N	RS232 Terminal	N/A	N/A	N/A	N/A	Supplied by applicant
O	RS232 Terminal	N/A	N/A	N/A	N/A	Supplied by applicant
P	POE IP CAMARA	3MP	MBL030A-ORZ0310	N/A	DOC	Supplied by applicant
Q	POE IP CAMARA	3MP	MBL030A-ORZ0310	N/A	DOC	Supplied by applicant
R	POE IP CAMARA	3MP	MBL030A-ORZ0310	N/A	DOC	Supplied by applicant
S	POE IP CAMARA	3MP	MBL030A-ORZ0310	N/A	DOC	Supplied by applicant
T	Laptop	DELL	P41G	FT4W952	N/A	Provided by Lab
U	PC	DELL	OptiPlex 390SF Base	F3PVWBX	N/A	Provided by Lab
V	10G LAN card	ASUS	XG-C100C	N/A	DoC	Provided by Lab
W	AI Computing System	Vecow	RCX-2750R-PEG	NA	NA	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DP cable	3	1.8	Yes	0	Provided by Lab
2	USB 2.0 cable	1	2	Yes	0	Provided by Lab
3	USB 2.0 cable	1	1.8	Yes	0	Provided by Lab
4	Audio (3.5") cable	1	1.2	No	0	Provided by Lab
5	Audio (3.5") cable	1	1.5	No	0	Provided by Lab
6	Data cable	1	0.55	No	0	Supplied by applicant
7	Shield RJ45 (Cat. 5e) cable	3	0.3	Yes	0	Supplied by applicant
8	GND	1	3	No	0	Provided by Lab
9	DC power cable	1	1	No	2	Accessory of EUT
10	AC power(3pin) cable	1	1.8	No	0	Accessory of EUT
11	Shield RJ45 (Cat. 5e) cable	1	10	Yes	0	Provided by Lab
12	Shield RJ45 (Cat. 5e) cable	1	10	Yes	0	Provided by Lab
13	Data cable	2	0.9	No	0	Supplied by applicant
14	Shield RJ45 (Cat. 5e) cable	1	0.3	Yes	0	Supplied by applicant
15	Shield RJ45 (Cat. 5e) cable	1	2	Yes	0	Supplied by applicant
16	Shield RJ45 (Cat. 5e) cable	1	1	Yes	0	Supplied by applicant



## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 Conducted Emissions from Power Ports

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal LYNICS	0900510	E1-011285	2021/10/1	2022/9/30
		E1-011286	2021/10/1	2022/9/30
50 Ohms Terminator LYNICS	0900510	E1-01-305	2022/2/9	2023/2/8
Attenuator STI	STI02-2200-10	NO.3	2021/10/22	2022/10/21
Coupling/Dcoupling Network Schwarzbeck	CDNE-M2	00097	2022/6/1	2023/5/31
	CDNE-M3	00091	2022/6/1	2023/5/31
Coupling/Dcoupling Network TESEQ	CDN A201A	44601	2021/12/22	2022/12/21
DC LISN R&S	ESH3-Z6	100219	2022/8/2	2023/8/1
		844950/018	2022/8/2	2023/8/1
DC LISN Schwarzbeck	NNLK 8121	8121-808	2022/4/29	2023/4/28
Isolation Transformer Erika Fiedler	D-65396	017	2021/9/9	2022/9/8
LISN EMCO	3825/2	9204-1964	2022/6/17	2023/6/16
		9504-2359	2022/8/2	2023/8/1
LISN R&S	ENV216	101195	2022/8/1	2023/7/31
		101196	2022/5/24	2023/5/23
		101197	2022/7/5	2023/7/4
LISN Schwarzbeck	NNLK 8121	8121-731	2022/5/26	2023/5/25
		8121-00759	2021/8/17	2022/8/16
	NNLK8129	8129229	2022/6/8	2023/6/7
Receiver R&S	ESCI	100412	2021/8/26	2022/8/25
RF Coaxial Cable Commate	5D-FB	Cable-CO3-01	2021/9/15	2022/9/14
Software BVADT	Cond_V7.3.7.4	N/A	N/A	N/A

#### Notes:

1. The test was performed in Linkou Conduction 3.
2. Tested Date: 2022/8/11

#### 4.2 Conducted Emissions from Wired Network Ports

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver R & S	ESCS 30	838251/021	2021/10/13	2022/10/12
LISN R&S	ENV216	101197	2022/7/5	2023/7/4
LISN R&S	ENV216	101195	2022/8/1	2023/7/31
LISN Schwarzbeck	NNLK8129	8129229	2022/6/8	2023/6/7
DC LISN Schwarzbeck	NNLK 8121	8121-808	2022/4/29	2023/4/28
LISN Schwarzbeck	NNLK 8121	8121-731	2022/5/26	2023/5/25
LISN Schwarzbeck	NNLK 8121	8121-00759	2021/8/17	2022/8/16
LISN R&S	ENV216	101196	2022/5/24	2023/5/23
LISN EMCO	3825/2	9504-2359	2022/8/2	2023/8/1
LISN EMCO	3825/2	9204-1964	2022/6/17	2023/6/16
Coupling/Dcoupling Network Schwarzbeck	CDNE-M2	00097	2022/6/1	2023/5/31
Coupling/Dcoupling Network Schwarzbeck	CDNE-M3	00091	2022/6/1	2023/5/31
Coupling/Dcoupling Network TESEQ	CDN A201A	44601	2021/12/22	2022/12/21
RF Coaxial Cable Commate	5D-FB	Cable-CO3-01	2021/9/15	2022/9/14
50 ohm terminal LYNICS	0900510	E1-011286	2021/10/1	2022/9/30
50 ohm terminal LYNICS	0900510	E1-011285	2021/10/1	2022/9/30
Isolation Transformer Erika Fiedler	D-65396	017	2021/9/9	2022/9/8
ISN FCC	F-071115-1057-1	20650	2022/6/15	2023/6/14
ISN FCC	F-071115-1057-1	20651	2022/4/17	2023/4/16
ISN FCC	F-071115-1057-1	20652	2022/1/19	2023/1/18
ISN FCC	F-071115-1057-1-09	120033	2022/6/16	2023/6/15
Impedance-stabilization-network TESEQ	ISN T8-Cat.6	53159	2022/3/22	2023/3/21
RF Current Probe FCC	F-33-4	56	2022/8/1	2023/7/31
Software BVADT	ISN_V7.3.7.4	NA	NA	NA

Notes:

1. The test was performed in Linkou Conduction 3 (ISN 3).
2. Tested Date: 2022/8/11

### 4.3 Radiated Emissions up to 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
ADT. Tower	AT100	0205	N/A	N/A
ADT. Turn Table	TT100	0205	N/A	N/A
Attenuator Mini-Circuits	UNAT-5+	PAD-ST2-01	2021/10/22	2022/10/21
Bi-log Broadband Antenna Schwarzbeck	VULB9168	9168-303	2021/10/29	2022/10/28
Coupling/Dcoupling Network Schwarzbeck	CDNE-M2	00097	2022/6/1	2023/5/31
	CDNE-M3	00091	2022/6/1	2023/5/31
Preamplifier Agilent	8447D	2944A11062	2022/2/16	2023/2/15
Pre_Amplifier EMCI	EMC9135	980711	2022/3/19	2023/3/18
Pre_Amplifier HP	8447D	2944A08313	2022/2/16	2023/2/15
RF Coaxial Cable Pacific	8D-FB	Cable-ST2-01	2021/10/22	2022/10/21
Software BVADT	Radiated_V7.6.15.9.5	N/A	N/A	N/A
TEST RECEIVER R&S	ESCS 30	100276	2022/4/19	2023/4/18
		100292	2021/9/1	2022/8/31

Notes:

1. The test was performed in Linkou Open Site2 , The test site validated date: 2022/7/16 (NSA)
2. Tested Date: 2022/8/12

#### 4.4 Radiated Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator Mini-Circuits	BW-K3-2W44+	PAD-CH7-03	2022/7/7	2023/7/6
	BW-N4W5+	PAD-CH10-02	2022/7/7	2023/7/6
Band Pass Filter MICRO-TRONICS	BRM17690	005	2022/5/26	2023/5/25
Fix tool for Boresight antenna tower BV	BAF-01	9	N/A	N/A
Horn Antenna EMCO	3115	6714	2021/11/14	2022/11/13
Horn Antenna ETS-Lindgren	3117-PA	00215857	2021/11/14	2022/11/13
Horn Antenna Schwarzbeck	BBHA 9170	212	2021/10/13	2022/10/12
Notch Filter MICRO-TRONICS	BRC50703-01	010	2022/5/26	2023/5/25
Pre-amplifier HP	8449B	3008A01292	2022/2/17	2023/2/16
Pre_Amplifier EMCI	EMC0126545	980076	2022/2/17	2023/2/16
	EMC184045B	980235	2022/2/17	2023/2/16
RF Coaxial Cable EM	EM102-KMKM-3.5+1M	EM102-KMKM-3.5+1M-02	2022/7/7	2023/7/6
Software BVADT	Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Keysight	N9020B	MY60110438	2021/12/8	2022/12/7
		MY60112260	2022/5/21	2023/5/20
Spectrum Analyzer Agilent	E4446A	MY51100009	2022/6/27	2023/6/26
Test Receiver Agilent	N9038A	MY51210137	2022/6/9	2023/6/8
Turn Table & Tower Max Full	MF7802	MF780208216	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 3 (CH 10).
2. Tested Date: 2022/8/13

#### 4.5 Electrostatic Discharges (ESD)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
ESD Generator EM Test	Dito//DM-150/330//DM-150/330-rfci	P1315117252/P1317117852	2022/7/7	2023/7/6

Notes:

1. The test was performed in Linkou ESD Room No.03.
2. Tested Date: 2022/8/27

#### 4.6 Radio Frequency Electromagnetic Field (RS)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Amplifier BONN	BSA 0125-800	1912556	N/A	N/A
Amplifier TESTQ	CBA 1G-275	T44344	N/A	N/A
Audio analyzer R&S	UPV	104565	2022/5/10	2023/5/9
Band pass filter B&K	WH3278	N/A	2021/11/17	2022/11/16
BiconiLog Antenna EMCO	3141	1001	N/A	N/A
CHANCE MOST Full Anechoic Chamber (9x5x3m)	Chance Most	RS-002	2022/2/3	2023/2/2
Controller AR	SC1000M3	305910	N/A	N/A
Ear Simulator Telephonometry B&K	4185	2553594	N/A	N/A
High Gain Horn Antenna AR	AT4010	0329800	N/A	N/A
LOG ANTENNA Schwarzbeck	Schwarzbeck Stlp 9149	9149-260	N/A	N/A
Log-Periodic Antenna AR	AT6080	0329465	N/A	N/A
Power Amplifier AR	35S4G8AM4	0326094	N/A	N/A
	100S1G4M3	0329249	N/A	N/A
Power Meter BOONTON	4232A	94901	2022/6/6	2023/6/5
Power Sensor BOONTON	51011-EMC	32807	2022/6/6	2023/6/5
		32832	2022/6/6	2023/6/5
Pressure-field Microphone B&K	4192	3190854	2021/12/20	2022/12/19
Signal Generator Agilent	E8257D	MY48050465	2022/6/29	2023/6/28
Software BVADT	RS_V7.6	N/A	N/A	N/A
Software	ABMS_ V7.4.3	N/A	N/A	N/A
Two channel microphone conditioning amplifier B&K	2690 OS2	3001996	2021/11/17	2022/11/16
Wireless Connection Tester R&S	CMW270	101075	2022/4/18	2023/4/17

Notes:

1. The test was performed in Linkou RS Room No.02.
2. Tested Date: 2022/8/24

#### 4.7 Fast Transients Common Mode (EFT)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Burst generator Haefely	PEFT 4010	154954	2022/3/29	2023/3/28

Notes:

1. The test was performed in Linkou EFT Room.
2. Tested Date: 2022/8/26

#### 4.8 Radio Frequency Common Mode (CS)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Amplifier AR	75A250AM1	306331	N/A	N/A
Audio analyzer R&S	UPV	104565	2022/5/10	2023/5/9
CDN FCC	FCC-801-M5-50A	100018	2022/1/18	2023/1/17
CDN TESEQ	CDN S200	53490	2022/2/24	2023/2/23
	CDN S400	52115	2022/2/24	2023/2/23
CDN Calibration Kit TESEQ	CDN T8S	29459	2022/2/22	2023/2/21
CDN M2-16Amp FCC	FCC-801-M2-16A	01047	2022/2/23	2023/2/22
Coupling Decoupling Network TESEQ	CDN M432S	56519	2022/2/23	2023/2/22
	CDN S751A	56435	2022/2/21	2023/2/20
		56436	2022/2/22	2023/2/21
	CDN ST08A	56525	2022/2/21	2023/2/20
		56527	2022/2/21	2023/2/20
	CDN T2A-10	54942	2022/2/22	2023/2/21
	CDN T8-10	40376	2022/2/22	2023/2/21
	CDN T8-230	56641	2022/2/22	2023/2/21
		56642	2022/2/22	2023/2/21
		56643	2022/2/22	2023/2/21
CDN T800	34428	2022/2/22	2023/2/21	
CDN T400A	49918	2022/2/23	2023/2/22	
Coupling/Dcoupling Network EM TEST	CDN M1/32A	306508	2022/2/23	2023/2/22
Coupling/Dcoupling Network TESEQ	CDN M232	37702	2022/2/23	2023/2/22
	CDN M332	41256	2022/2/23	2023/2/22
		41258	2022/2/23	2023/2/22
Current Clamp FCC	F-120-9A	361	2022/8/17	2023/8/16
Digital Sweep Function Generator Topward	8120	984801	N/A	N/A
Ear Simulator Telephonometry B&K	4185	2553594	N/A	N/A
FCC EM Injection Clamp FCC	F-203I-23mm	455	N/A	N/A



Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Mouth Simulator B&K	4227	2630632	N/A	N/A
POWER AMPLIFIER B&K	2716C	2610979	N/A	N/A
Power Meter R & S	NRVD	837794/040	2021/10/19	2022/10/18
Power Sensor R & S	NRV-Z5	837878/039	2021/10/19	2022/10/18
Pressure-field Microphone B&K	4192	2735407	2021/11/19	2022/11/18
R&S SML03 S.G R&S	SML03	101801	2022/1/11	2023/1/10
Software BVADT	ABMS_ V7.4.3	N/A	N/A	N/A
	CS_V7.4.2	N/A	N/A	N/A
Two channel microphone conditioning amplifier B&K	2690 OS2	3001996	2021/11/17	2022/11/16
Wireless Connection Tester R&S	CMW270	101075	2022/4/18	2023/4/17

Notes:

1. The test was performed in Linkou CS Room No.1.
2. Tested Date: 2022/8/22

**4.9 Power Frequency Magnetic Field (PFMF)**

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Magnetic field generator NARDA	PMM 1008	0100X30701	2022/8/23	2023/8/22
Magnetic Field Meter Combinova	MFM 10	224	2021/10/20	2022/10/19

Notes:

1. The test was performed in Linkou EMS Room No.02.
2. Tested Date: 2022/8/25

## 5 Limits of Test Items

### 5.1 Conducted Emissions from Power Ports

For AC mains power input/output Port

Frequency (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.2 Conducted Emissions from Wired Network Ports

Frequency (MHz)	Coupling Device	Class A				Class B			
		Voltage Limit (dBuV)		Current limits (dBuA)		Voltage Limit (dBuV)		Current limits (dBuA)	
		Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	Using AAN	97-87	84-74	-	-	84-74	74-64	-	-
0.5-30		87	74	-	-	74	64	-	-
0.15-0.5	Using CVP and Current probe	97-87	84-74	53-43	40-30	84-74	74-64	40-30	30-20
0.5-30		87	74	43	30	74	64	30	20
0.15-0.5	Using a 150 $\Omega$ load	-	-	53-43	40-30	-	-	40-30	30-20
0.5-30		-	-	43	30	-	-	30	20

Note: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

### 5.3 Radiated Emissions up to 1 GHz

Frequency (MHz)	Class A Quasi-peak (dBuV/m)		Class B Quasi-peak (dBuV/m)	
	at 3m	at 10m	at 3m	at 10m
30 - 230	50	40	40	30
230 - 1000	57	47	47	37

Notes: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



#### 5.4 Radiated Emissions above 1 GHz

Frequency (GHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Average	Peak	Average	Peak
1 to 3	56	76	50	70
3 to 6	60	80	54	74

- Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### Frequency Range of Radiated Measurement (For unintentional radiators)

Highest internal frequency ( $F_x$ ) (MHz)	Highest measurement frequency ( $F_M$ ) (GHz)
$F_x \leq 108 \text{ MHz}$	1
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz

$F_x$  is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

## 5.5 General immunity requirements

Port	Basic Standard	Test item	Test specification	Performance criteria
Power input (AC)	IEC 61000-4-4	Fast Transients, Common Mode (EFT)	±1 kV 5/50 ns (Tr/Th) 5 kHz, repetition frequency	B
	IEC 61000-4-5	Surge	Line to line: ±1 kV, 1.2/50 µs Line to earth: ±2 kV, 1.2/50 µs	B
	IEC 61000-4-6	Radio Frequency, Common Mode (CS)	0.15-10 MHz, 3V, 80% AM (1kHz), 10-30 MHz, 3V-1V, 80% AM (1kHz), 30-80 MHz, 1V, 80% AM (1kHz),	A
	IEC 61000-4-11	Voltage dips and interruptions (DIP)	<b>Voltage Dips:</b> < 5 % residual voltage, 0.5 cycle 70% residual voltage, 25 cycles (at 50Hz) <b>Voltage Interruption:</b> < 5 % residual voltage, 250 cycles (at 50 Hz)	B C C
DC power/ Wired network and Signal/ Control port	IEC 61000-4-4	Fast Transients, Common Mode (EFT)	±0.5 kV 5/50 ns (Tr/Th) 100 kHz, repetition frequency for xDSL port 5 kHz, repetition frequency for other port	B
	IEC 61000-4-5	Surge	<b>Wired network ports</b> (directly connected to outdoor cables): Symmetrically operated: 10/700µs w/o primary protectors: ±1.0kV, or with primary protectors fitted: ±1.0kV and ±4.0kV, Coaxial or shielded operated: 1.2/50µs shield to ground: ±0.5 kV,	C B
			<b>DC power ports</b> (directly connected to outdoor cables): 1.2/50 µs each individual line to earth, or shield to ground: ±0.5 kV,	B
	IEC 61000-4-6	Radio Frequency, Common Mode (CS)	0.15-10 MHz, 3V, 80% AM (1kHz), 10-30 MHz, 3V-1V, 80% AM (1kHz), 30-80 MHz, 1V, 80% AM (1kHz),	A
		Broadband impulse noise disturbances (Applicable only to xDSL ports.)	<b>Repetitive :</b> Impulse frequency profile : 0.15 – 0.5 MHz, 107 dBuV ; 0.5 – 10 MHz, 107 – 36 dBuV ; 10 – 30 MHz, 36 – 30 dBuV Burst duration : 0.70 ms Burst period :10 ms(for 50 Hz) At least 2 minutes for each port under test. <b>Isolated :</b> Impulse frequency profile : 0.15 –30 MHz, 110 dBuV Burst duration : 0.24 ms, 10 ms and 300 ms Isolated impulses : 5 times Interval : at least 60 seconds	A B

Port	Basic Standard	Test item	Test specification	Performance criteria
Enclosure	IEC 61000-4-2	Electrostatic Discharge (ESD)	±4 kV (contact) ±8 kV (Air)	B
	IEC 61000-4-3	Radio Frequency Electromagnetic Field (RS)	Swept Frequency Test: 80 to 1000(MHz), 3 V/m, 80 % AM (1 kHz) Spot Frequency Test: 1800, 2600, 3500, 5000 MHz (±1 %), 3V/m, 80% AM (1kHz)	A
	IEC 61000-4-8	Power Frequency Magnetic Field (PFMF)	1A/m, 50Hz	A




## 6.2 Conducted Emissions from Wired Network Ports

### Method of Using AANs:

- The EUT is placed 0.4 meters from the conducting wall of the shielded room and connected to AAN directly to reference ground plane.
- If voltage measurement is used, measure voltage at the measurement port of the AAN, correct the reading by adding the AAN voltage division factor, and compare to the voltage limit.
- It is not necessary to apply the current limit if a AAN is used.
- The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

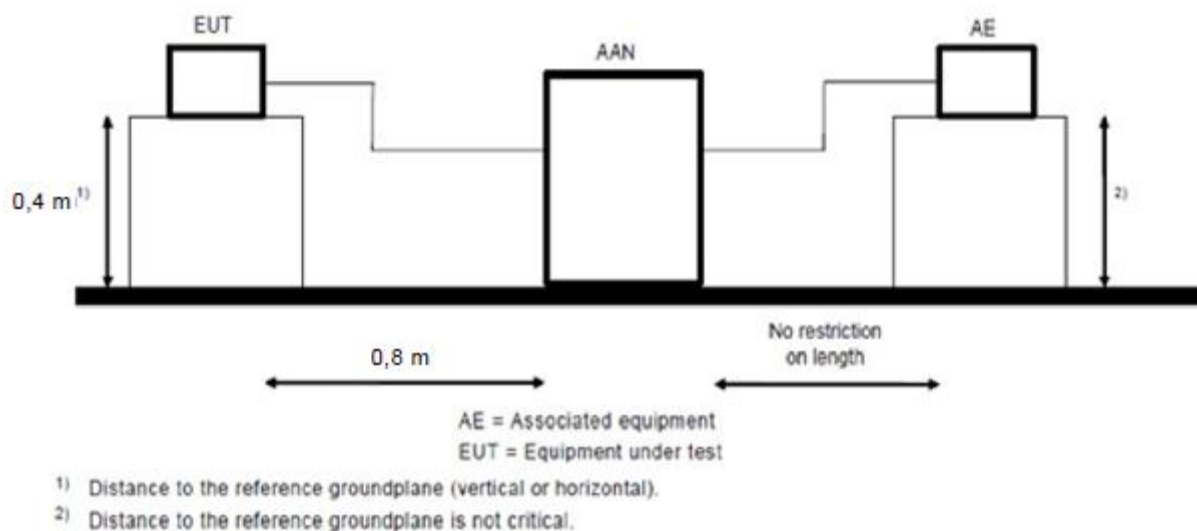


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### Method of Using a 150 Ω load to the outside surface of the shielding cable:

- Breaks the external protective insulation (exposing the shield) and connect a 150Ω resistor from the outside surface of the shield to ground.
- A current probe shall be placed at 0.1 m from the 150Ω resistor. The current probe to EUT horizontal distance is between 0.3 m to 0.8 m.
- If current measurement is used, measure current at the measurement port of the current probe, correct the reading by adding the current probe division factor, and compare to the current limit.
- It is not necessary to apply the voltage limit if a current probe is used.
- The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

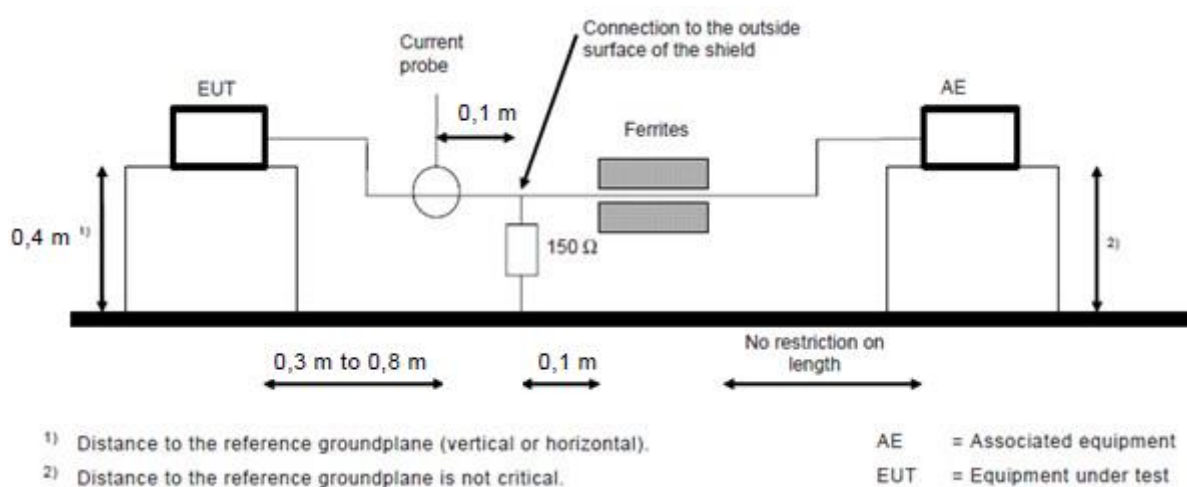


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### Method of Using a combination of current probe and capacitive voltage probe:

- a. Measure current with a current probe.
- b. Compare the measured current with the applicable current limit.
- c. Measure voltage with a capacitive voltage probe as specified in 5.2.2 of CISPR 16-1-2.
- d. Adjust the measured voltage as follows:
  - current margin  $\leq 6$  dB – subtract the actual current margin from measured voltage;
  - current margin  $> 6$  dB – subtract 6 dB from measured voltage.
- e. Compare adjusted voltage with the applicable voltage limit
- f. Both the measured current and the adjusted voltage shall be below the applicable
- g. The test results of disturbance at telecommunication ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

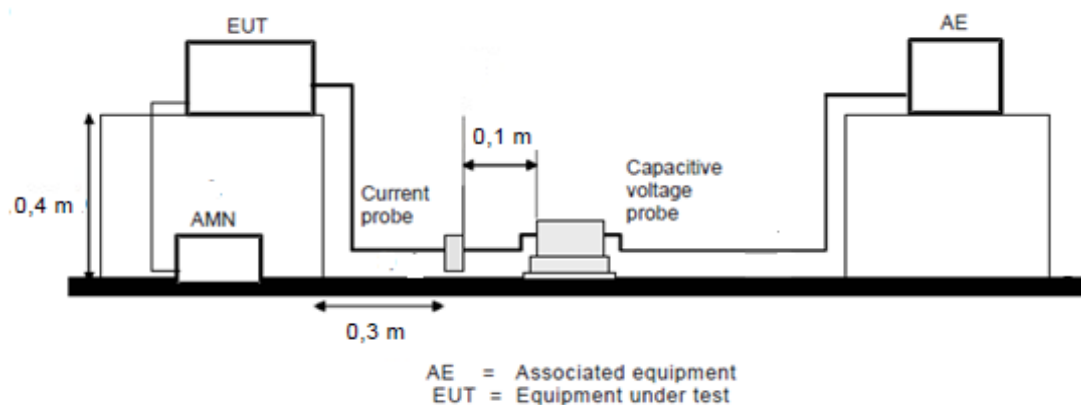


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 6.3 Radiated Emissions up to 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT is set 10 meters for 0.03 GHz to 1 GHz away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1 m to 4 m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

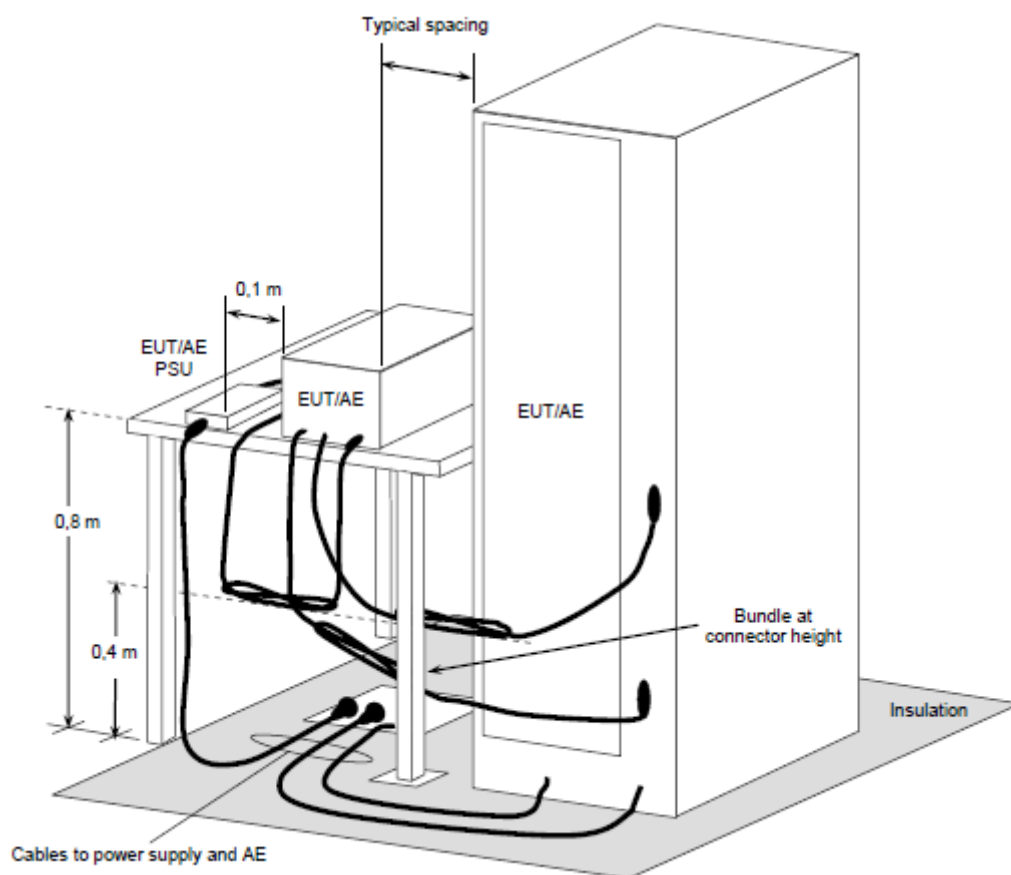


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.



## 6.4 Radiated Emissions above 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the the floor standing EUT shall be insulated (by insulation of 12 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set  $d = 3$  meters for 1 GHz to 5 GHz away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

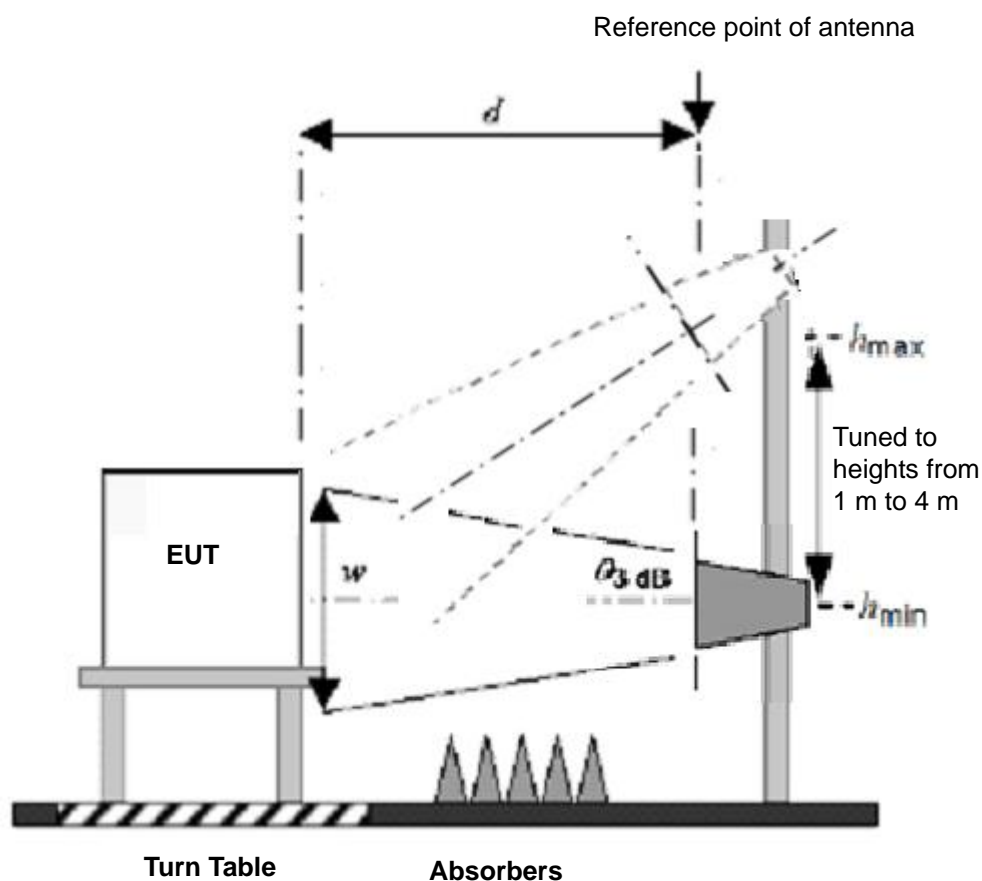


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 6.5 Electrostatic Discharges (ESD)

<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Number of Discharge:</b>	Air – Direct: 10 discharges per location (each polarity) Contact – Direct & Indirect: 10 discharges per location (each polarity)
<b>Discharge Period:</b>	1-second minimum

The basic test procedure was in accordance with EN/IEC 61000-4-2:

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

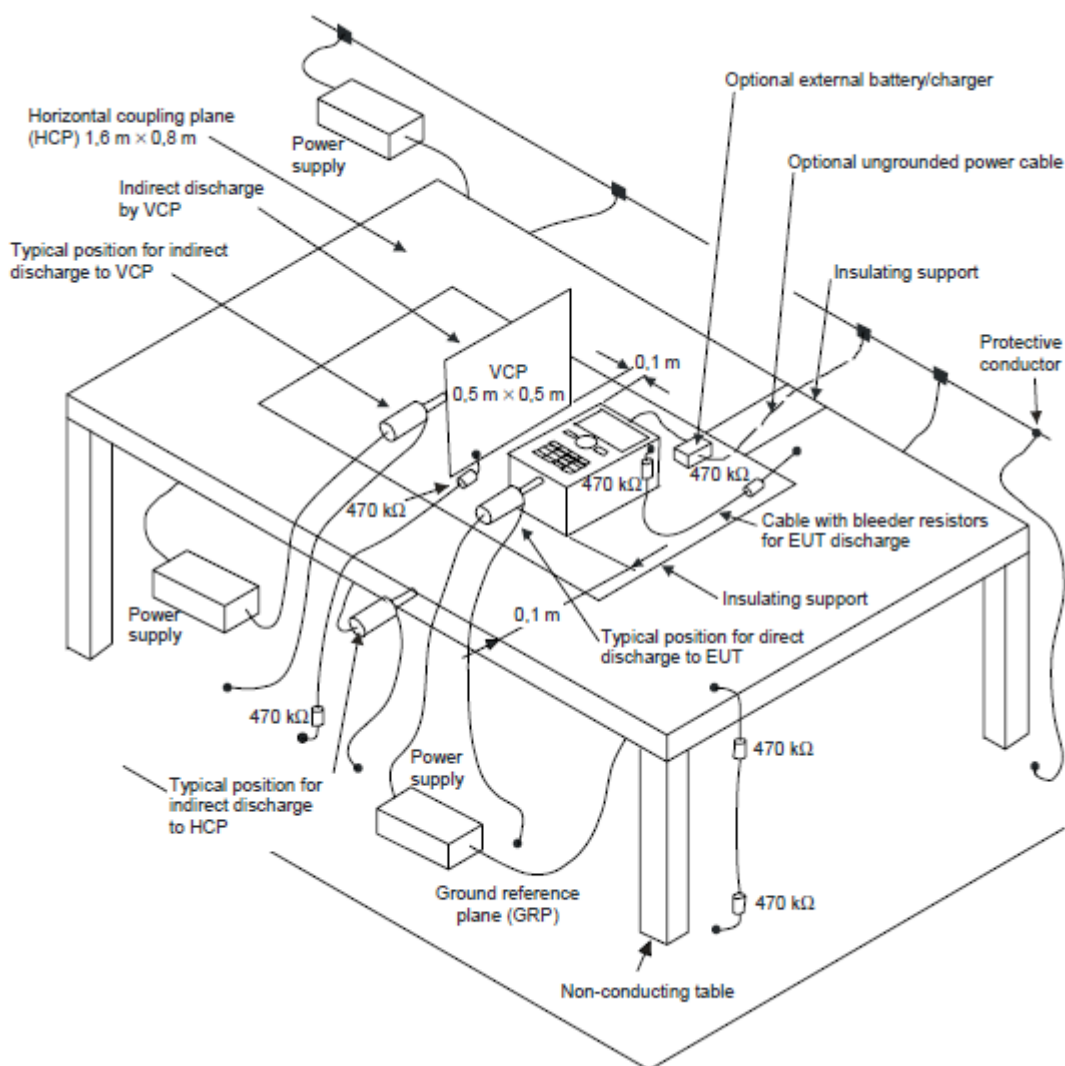

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**NOTE:**

**TABLE-TOP EQUIPMENT**

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN/IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

**FLOOR-STANDING EQUIPMENT**


The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 m.

## 6.6 Radio Frequency Electromagnetic Field (RS)

Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Dwell Time:	3 seconds

The test procedure was in accordance with EN/IEC 61000-4-3.

- The testing was performed in a modified semi-anechoic chamber.
- The frequency range shall be swept, with the signal 80% amplitude modulated with a 1kHz sine wave.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

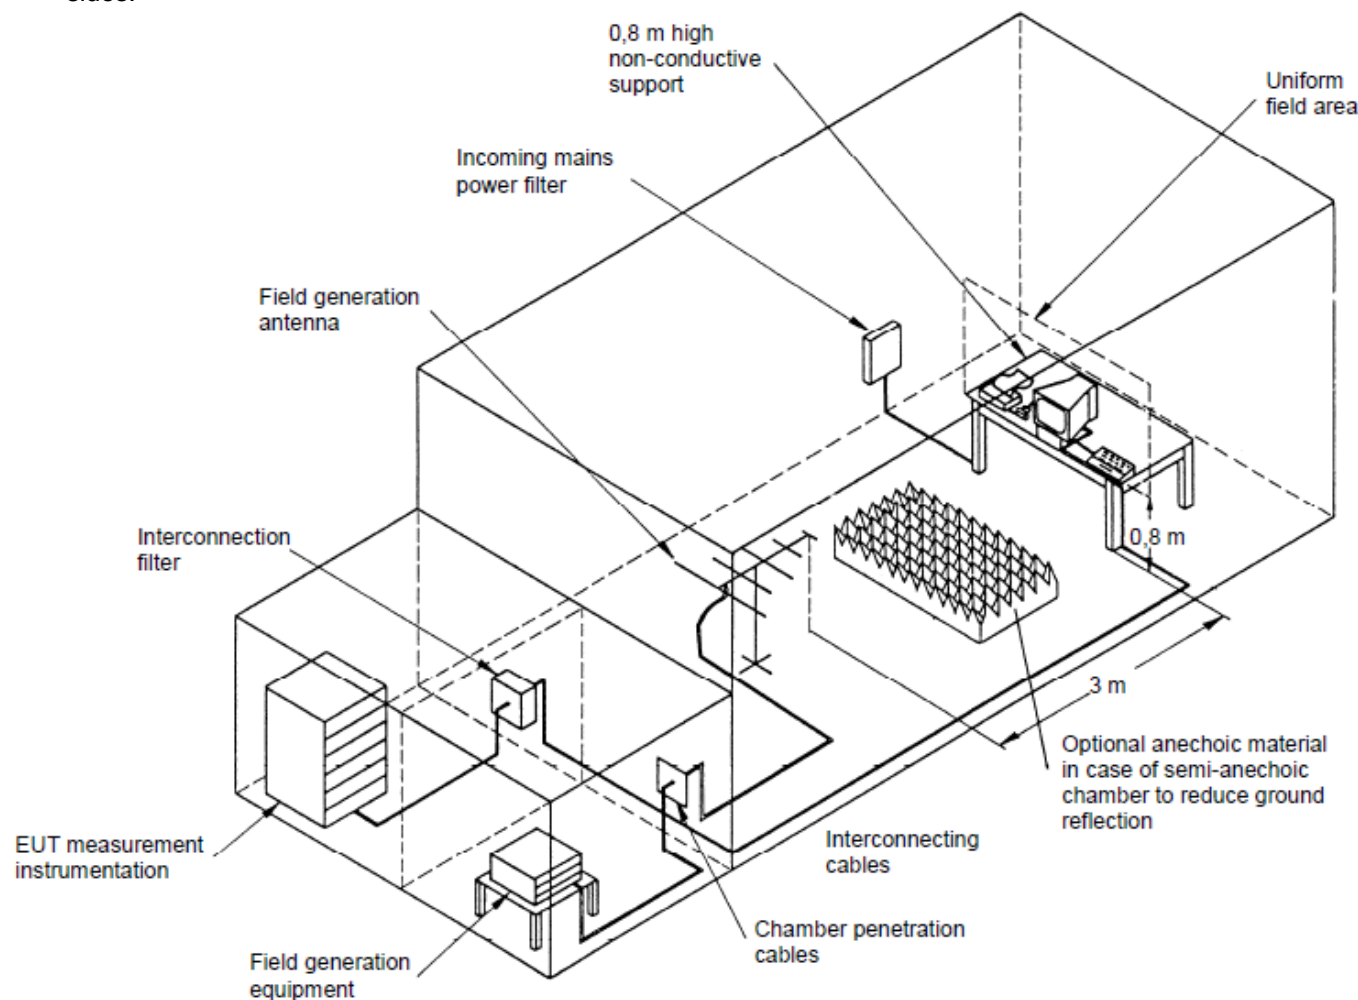

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### NOTE:

#### **TABLETOP EQUIPMENT**

The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

#### **FLOOR STANDING EQUIPMENT**


The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.





**Broadband impulse noise disturbances, Repetitive and Isolated** (Applicable only to xDSL ports.)

- a. The EUT shall be tested within its intended operating and climatic conditions.
- b. An artificial hand was placed on the hand-held accessory and connected to the ground reference plane.
- c. One of the CDNs not used for injection was terminated with 50 ohm, providing only one return path. All other CDNs were coupled as decoupling networks.
- d. For the repetitive impulse test the disturbance shall be applied for a period of at least 2 minutes for each port under test.
- e. For the isolated impulse test a minimum of 5 isolated impulses shall be applied with an interval of at least 60 seconds between successive impulses.
- f. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

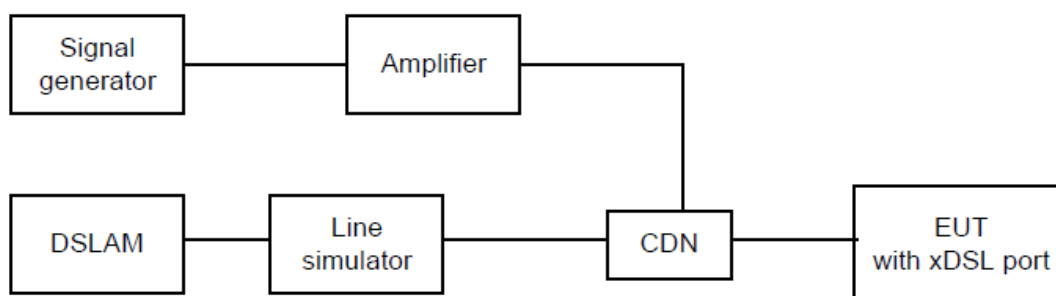



**Example schematic of the broadband impulsive conducted disturbances test setup**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 6.9 Power Frequency Magnetic Field (PFMF)

<b>Observation Time:</b>	1 minute
<b>Inductance Coil:</b>	Rectangular coil, 1 m x 1 m (L x W) or 2.6 m x 1 m (L x W)

- The equipment is configured and connected to satisfy its functional requirements.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

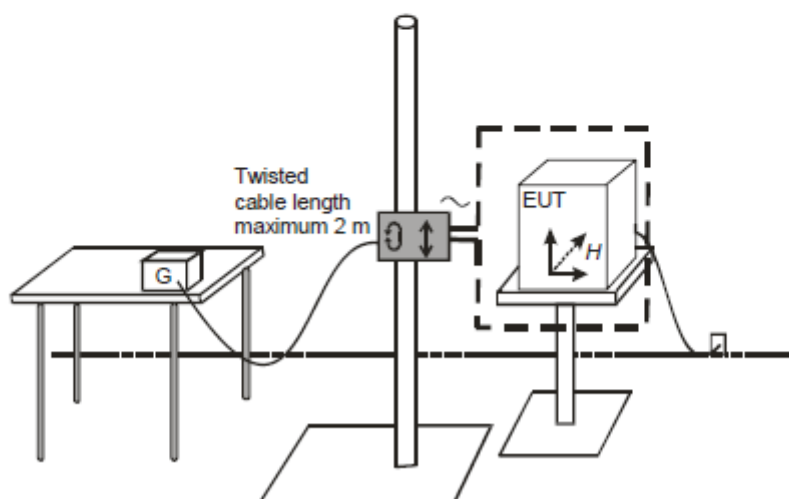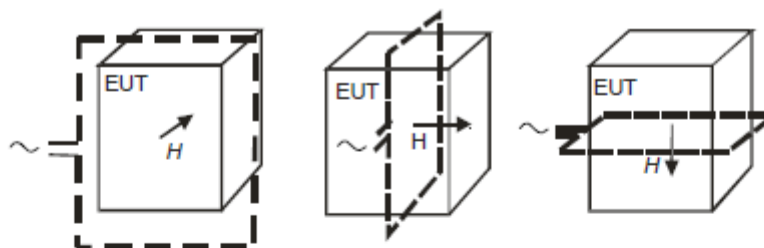

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



## 7 Test Results of Test Item

### 7.1 Conducted Emissions from Power Ports


#### Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power (System)	110 Vac, 60 Hz	Environmental Conditions	26°C, 70% RH
Tested by	Ed. Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.64	36.35	13.47	45.99	23.11	79.00	66.00	-33.01	-42.89
2	0.25865	9.65	30.99	20.82	40.64	30.47	79.00	66.00	-38.36	-35.53
3	1.30958	9.71	22.53	10.64	32.24	20.35	73.00	60.00	-40.76	-39.65
4	5.63358	9.81	27.20	19.16	37.01	28.97	73.00	60.00	-35.99	-31.03
5	8.96967	9.86	21.63	11.34	31.49	21.20	73.00	60.00	-41.51	-38.80
6	12.57561	9.90	26.89	25.73	36.79	35.63	73.00	60.00	-36.21	-24.37

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

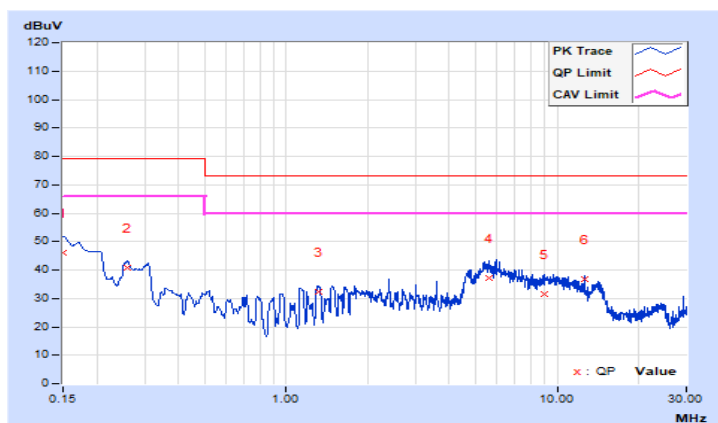


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power (System)	110 Vac, 60 Hz	Environmental Conditions	26°C, 70% RH
Tested by	Ed. Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.65	37.34	13.43	46.99	23.08	79.00	66.00	-32.01	-42.92
2	0.25865	9.65	32.74	23.43	42.39	33.08	79.00	66.00	-36.61	-32.92
3	2.39110	9.76	26.44	22.88	36.20	32.64	73.00	60.00	-36.80	-27.36
4	4.68295	9.81	23.90	15.82	33.71	25.63	73.00	60.00	-39.29	-34.37
5	6.16939	9.84	24.11	17.17	33.95	27.01	73.00	60.00	-39.05	-32.99
6	12.57561	9.96	26.89	25.15	36.85	35.11	73.00	60.00	-36.15	-24.89

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

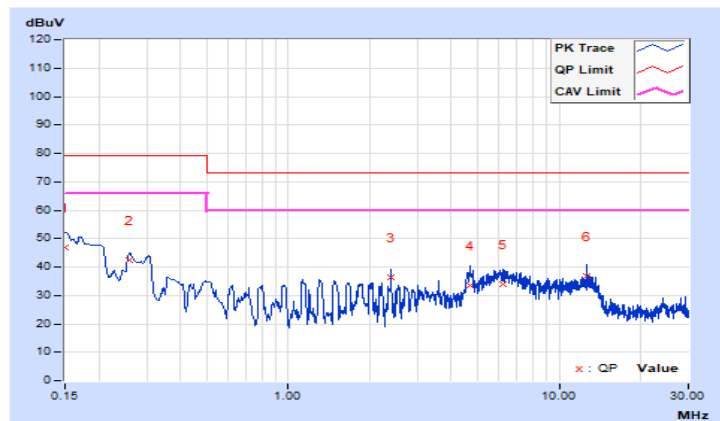


**Mode B**

<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power (System)</b>	230 Vac, 50 Hz	<b>Environmental Conditions</b>	26°C, 70% RH
<b>Tested by</b>	Ed. Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17283	9.64	28.31	20.53	37.95	30.17	79.00	66.00	-41.05	-35.83
2	0.23586	9.65	29.94	17.12	39.59	26.77	79.00	66.00	-39.41	-39.23
3	2.39110	9.75	24.43	22.66	34.18	32.41	73.00	60.00	-38.82	-27.59
4	4.68686	9.80	24.12	14.33	33.92	24.13	73.00	60.00	-39.08	-35.87
5	6.04424	9.82	23.95	16.62	33.77	26.44	73.00	60.00	-39.23	-33.56
6	12.57561	9.90	25.96	24.91	35.86	34.81	73.00	60.00	-37.14	-25.19

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

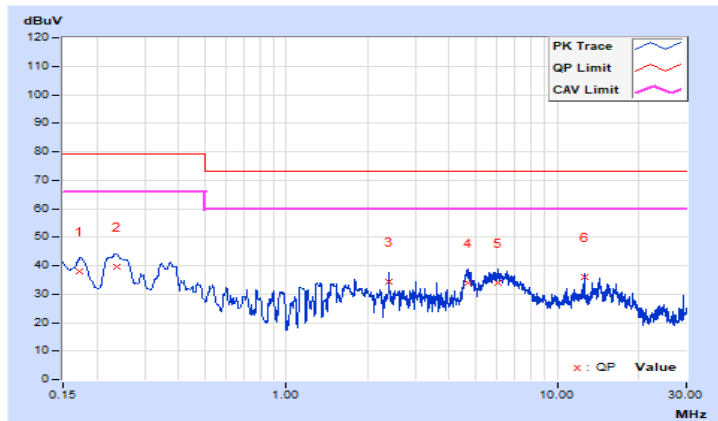


<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power (System)</b>	230 Vac, 50 Hz	<b>Environmental Conditions</b>	26°C, 70% RH
<b>Tested by</b>	Ed. Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17605	9.65	30.25	23.98	39.90	33.63	79.00	66.00	-39.10	-32.37
2	0.23586	9.65	31.40	18.37	41.05	28.02	79.00	66.00	-37.95	-37.98
3	0.37207	9.67	28.35	13.36	38.02	23.03	79.00	66.00	-40.98	-42.97
4	2.38719	9.76	22.83	18.90	32.59	28.66	73.00	60.00	-40.41	-31.34
5	4.79245	9.82	23.76	18.45	33.58	28.27	73.00	60.00	-39.42	-31.73
6	6.33365	9.85	22.53	16.24	32.38	26.09	73.00	60.00	-40.62	-33.91

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

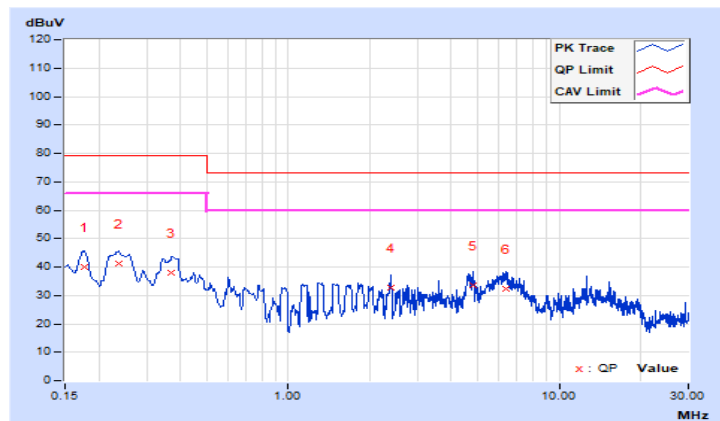

## 7.2 Conducted Emissions from Wired Network Ports


### Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	25°C, 70% RH
Tested by	Ed. Lin		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	1.19616	9.75	40.39	38.83	50.14	48.58	87.00	74.00	-36.86	-25.42
2	2.99339	9.85	46.67	45.42	56.52	55.27	87.00	74.00	-30.48	-18.73
3	3.59178	9.88	48.38	47.38	58.26	57.26	87.00	74.00	-28.74	-16.74
4	4.19016	9.90	48.73	48.08	58.63	57.98	87.00	74.00	-28.37	-16.02
5	12.57561	10.13	49.41	48.80	59.54	58.93	87.00	74.00	-27.46	-15.07
6	20.35850	10.17	41.80	41.13	51.97	51.30	87.00	74.00	-35.03	-22.70

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

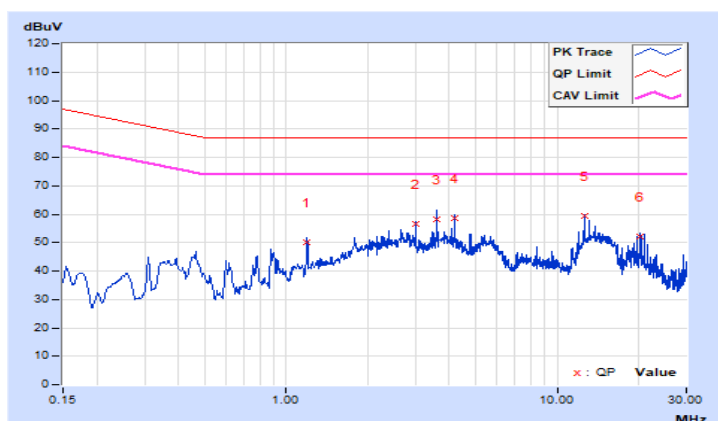


**Mode B**

<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power (System)</b>	230 Vac, 50 Hz	<b>Environmental Conditions</b>	25°C, 70% RH
<b>Tested by</b>	Ed. Lin		

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	1.19616	9.75	39.41	37.70	49.16	47.45	87.00	74.00	-37.84	-26.55
2	2.99339	9.85	47.17	46.08	57.02	55.93	87.00	74.00	-29.98	-18.07
3	3.58787	9.88	48.48	47.49	58.36	57.37	87.00	74.00	-28.64	-16.63
4	4.19065	9.90	48.67	48.04	58.57	57.94	87.00	74.00	-28.43	-16.06
<b>5</b>	<b>12.57561</b>	<b>10.13</b>	<b>48.98</b>	<b>48.85</b>	<b>59.11</b>	<b>58.98</b>	<b>87.00</b>	<b>74.00</b>	<b>-27.89</b>	<b>-15.02</b>
6	20.35850	10.17	40.95	40.67	51.12	50.84	87.00	74.00	-35.88	-23.16

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

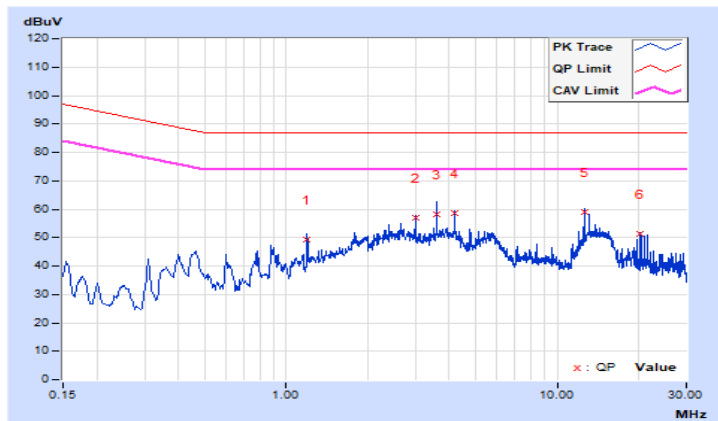

### 7.3 Radiated Emissions up to 1 GHz


#### Mode A

<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP), 120 kHz
<b>Tested By</b>	Paul Chen	<b>Environmental Conditions</b>	33°C, 69% RH

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.17	27.83 QP	40.00	-12.17	4.00 H	71	36.56	-8.73
2	124.91	28.99 QP	40.00	-11.01	4.00 H	258	38.70	-9.71
3	216.03	33.10 QP	40.00	-6.90	4.00 H	223	43.32	-10.22
4	297.12	35.46 QP	47.00	-11.54	3.68 H	238	41.65	-6.19
<b>5</b>	<b>324.06</b>	<b>40.86 QP</b>	<b>47.00</b>	<b>-6.14</b>	<b>3.31 H</b>	<b>229</b>	<b>46.20</b>	<b>-5.34</b>
6	475.07	34.46 QP	47.00	-12.54	2.23 H	230	36.84	-2.38
7	500.01	37.31 QP	47.00	-9.69	1.86 H	267	39.11	-1.80
8	550.02	39.52 QP	47.00	-7.48	1.75 H	120	40.23	-0.71
9	662.74	39.95 QP	47.00	-7.05	1.33 H	291	37.89	2.06

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

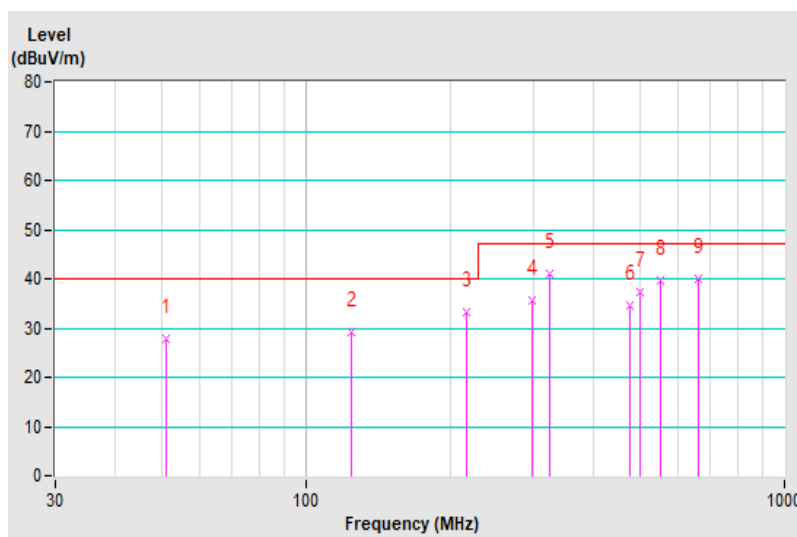


<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP), 120 kHz
<b>Tested By</b>	Paul Chen	<b>Environmental Conditions</b>	33°C, 69% RH

**Antenna Polarity & Test Distance : Vertical at 10 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.27	32.84 QP	40.00	-7.16	1.19 V	247	42.17	-9.33
2	53.20	28.73 QP	40.00	-11.27	1.68 V	180	37.54	-8.81
3	124.99	32.15 QP	40.00	-7.85	1.00 V	55	41.84	-9.69
4	158.64	30.59 QP	40.00	-9.41	1.00 V	133	38.31	-7.72
5	216.03	33.58 QP	40.00	-6.42	1.00 V	184	43.80	-10.22
6	297.12	34.16 QP	47.00	-12.84	1.00 V	250	40.35	-6.19
7	324.01	38.60 QP	47.00	-8.40	1.00 V	133	43.94	-5.34
8	424.41	33.81 QP	47.00	-13.19	1.00 V	216	37.15	-3.34
9	500.00	34.99 QP	47.00	-12.01	1.00 V	118	36.79	-1.80
10	662.48	35.96 QP	47.00	-11.04	3.21 V	118	33.92	2.04

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

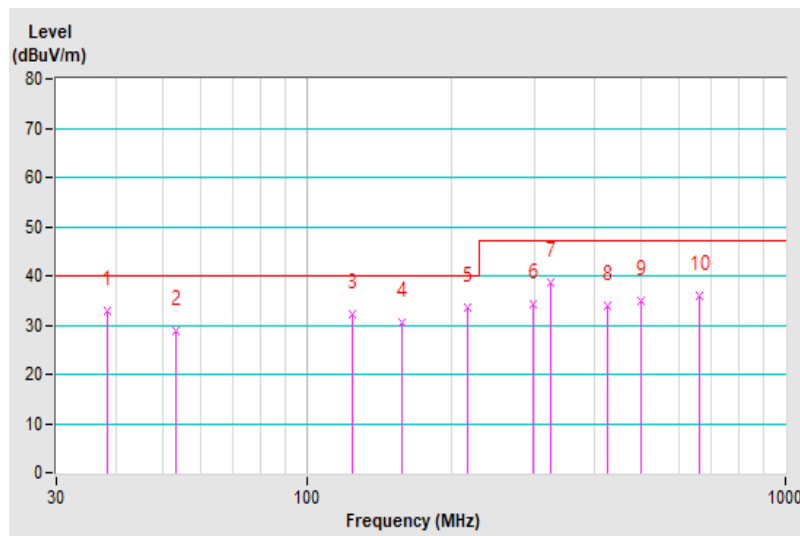



## 7.4 Radiated Emissions above 1 GHz


### Mode A

Frequency Range	1GHz ~ 6GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1MHz
Tested By	Adam Chen	Environmental Conditions	25°C, 71% RH

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1324.97	54.87 PK	76.00	-21.13	1.02 H	153	58.70	-3.83
2	1324.97	47.83 AV	56.00	-8.17	1.02 H	153	51.66	-3.83
3	1986.04	50.18 PK	76.00	-25.82	1.53 H	167	51.58	-1.40
4	1986.04	37.05 AV	56.00	-18.95	1.53 H	167	38.45	-1.40
5	2179.21	50.56 PK	76.00	-25.44	1.00 H	199	51.36	-0.80
6	2179.21	36.75 AV	56.00	-19.25	1.00 H	199	37.55	-0.80
7	2399.56	54.63 PK	76.00	-21.37	1.32 H	204	54.55	0.08
8	2399.56	37.78 AV	56.00	-18.22	1.32 H	204	37.70	0.08
9	3646.74	55.37 PK	80.00	-24.63	1.00 H	4	50.76	4.61
10	3646.74	41.87 AV	60.00	-18.13	1.00 H	4	37.26	4.61
11	5400.08	60.40 PK	80.00	-19.60	2.40 H	104	52.61	7.79
12	<b>5400.08</b>	<b>53.30 AV</b>	<b>60.00</b>	<b>-6.70</b>	<b>2.40 H</b>	<b>104</b>	<b>45.51</b>	<b>7.79</b>

#### Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)  
– Pre-Amplifier Factor (dB)
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value

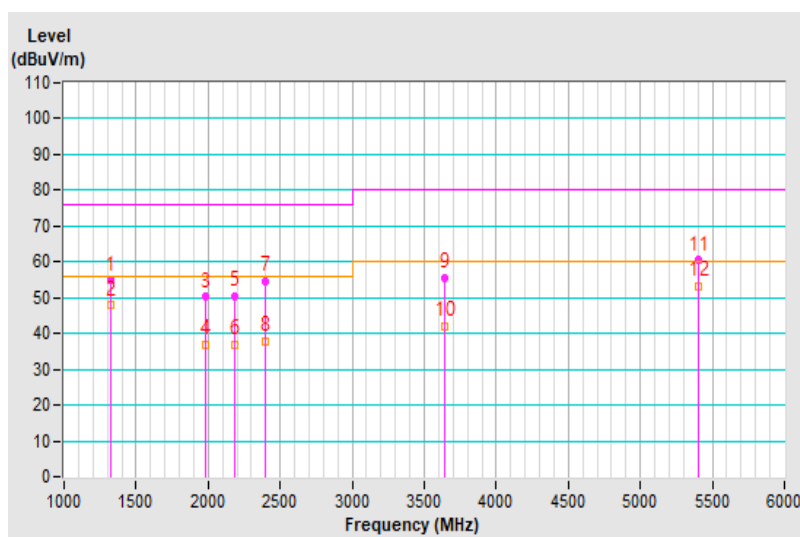


<b>Frequency Range</b>	1GHz ~ 6GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Tested By</b>	Adam Chen	<b>Environmental Conditions</b>	25°C, 71% RH

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1325.06	56.01 PK	76.00	-19.99	2.54 V	0	59.83	-3.82
2	1325.06	47.63 AV	56.00	-8.37	2.54 V	0	51.45	-3.82
3	2133.58	53.50 PK	76.00	-22.50	2.25 V	190	54.29	-0.79
4	2133.58	39.69 AV	56.00	-16.31	2.25 V	190	40.48	-0.79
5	2400.07	56.51 PK	76.00	-19.49	1.35 V	199	56.43	0.08
6	2400.07	37.70 AV	56.00	-18.30	1.35 V	199	37.62	0.08
7	2981.31	55.58 PK	76.00	-20.42	1.09 V	360	53.52	2.06
8	2981.31	47.51 AV	56.00	-8.49	1.09 V	360	45.45	2.06
9	4000.13	55.80 PK	80.00	-24.20	1.53 V	158	50.48	5.32
10	4000.13	40.09 AV	60.00	-19.91	1.53 V	158	34.77	5.32
11	5400.06	59.51 PK	80.00	-20.49	2.50 V	112	51.72	7.79
12	5400.06	52.35 AV	60.00	-7.65	2.50 V	112	44.56	7.79

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

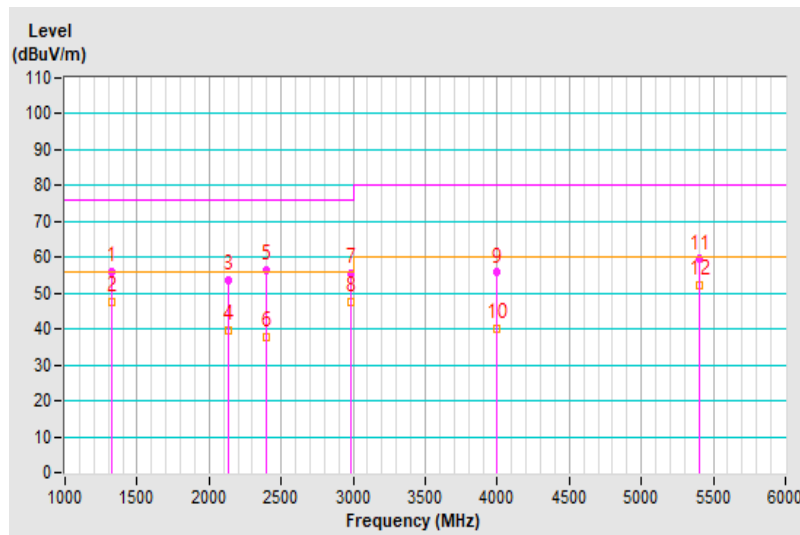

## 7.5 Electrostatic Discharges (ESD)

### Mode A

#### For EN 55035

Input Power (System)	AC 230V / 50Hz	Environmental conditions	24 °C, 44 % RH 1000 mbar
Tested by	Joey Liu		

Test Results of Direct Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge	Performance Criteria
2	+/-	1~6,20~26,36~40	Note 1	---	A
4	+/-	1~6,20~26,36~40	Note 2	---	B
2, 4	+/-	7~19,27~35,41,42	---	Note 1	A
8	+/-	7~8,35,41,42	---	Note 1	A
8	+/-	9~19,27~34	---	Note 2	B

Description of test points of direct application: Please refer to following page for representative mark only.

Test Results of Indirect Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criteria
2, 4	+/-	Four Side	Note 1	Note 1	A

Description of test points of indirect application:


1. Front side                      2. Rear side                      3. Right side                      4. Left side

Please refer to the attached page for description of test points.

Notes:

1. The EUT is operated normal during the test.
2. There are flicker on the Display screen, but auto recover after test.


### Description of test point


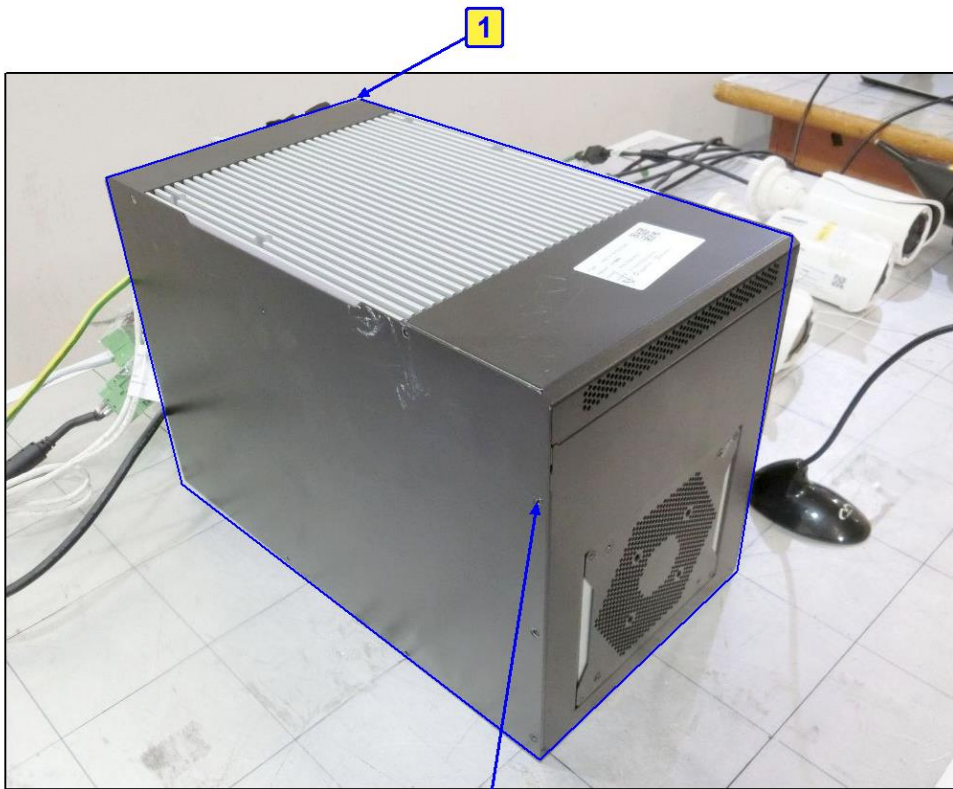




2


3

4

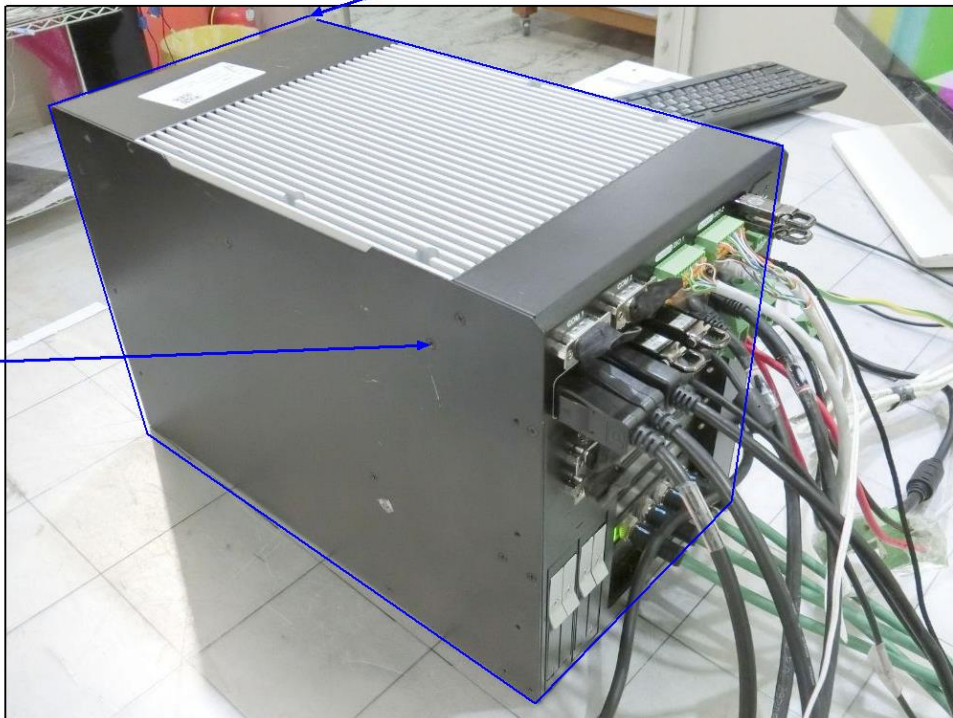

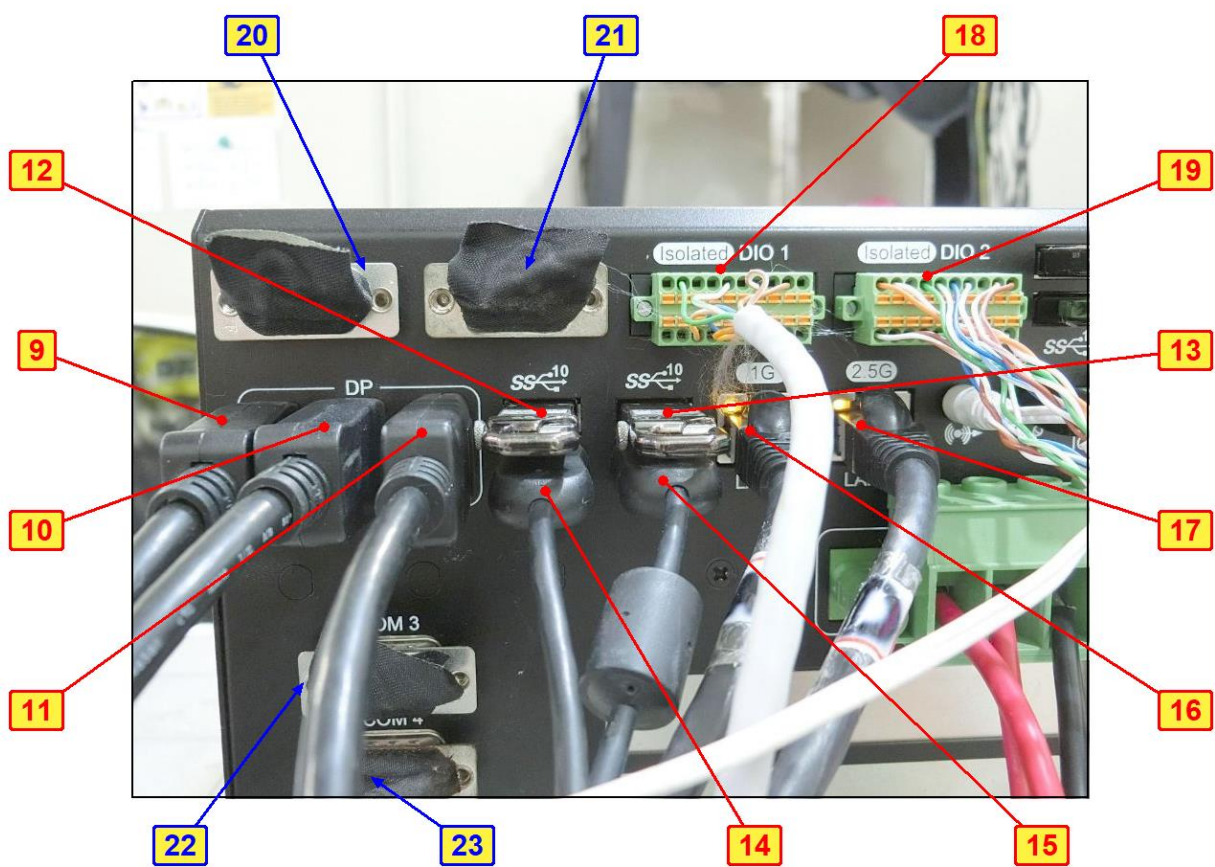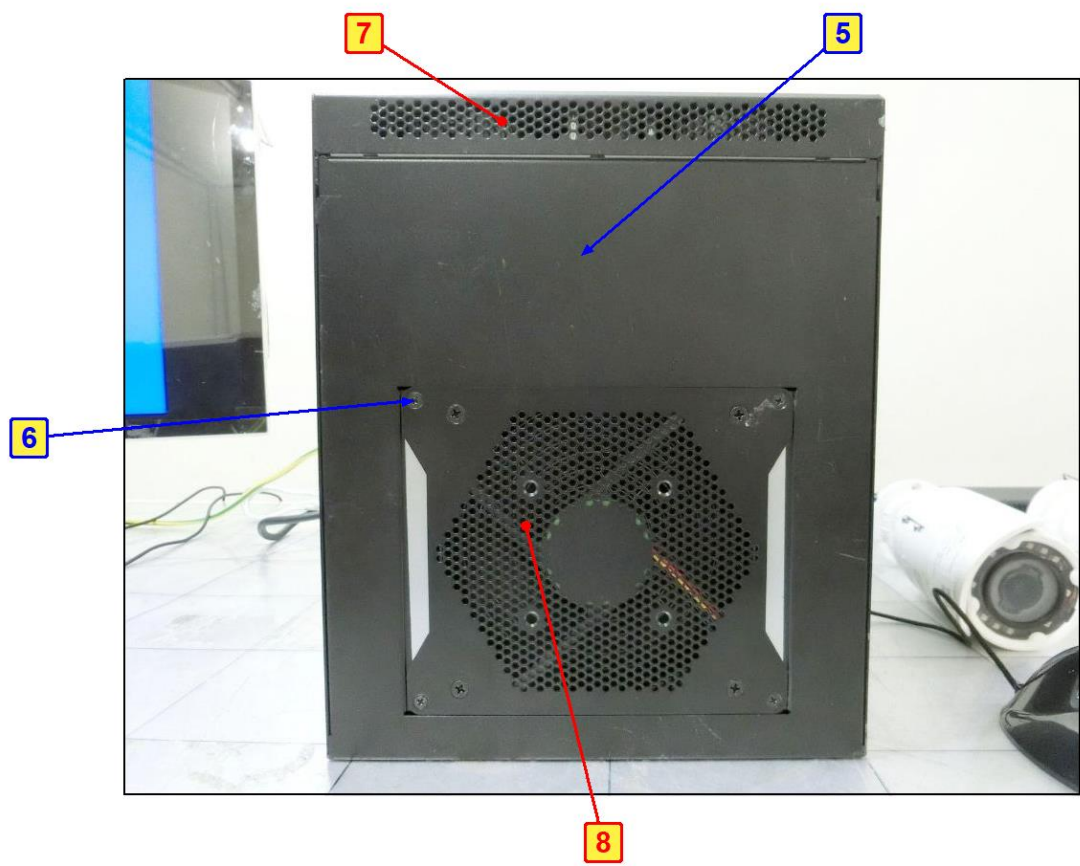

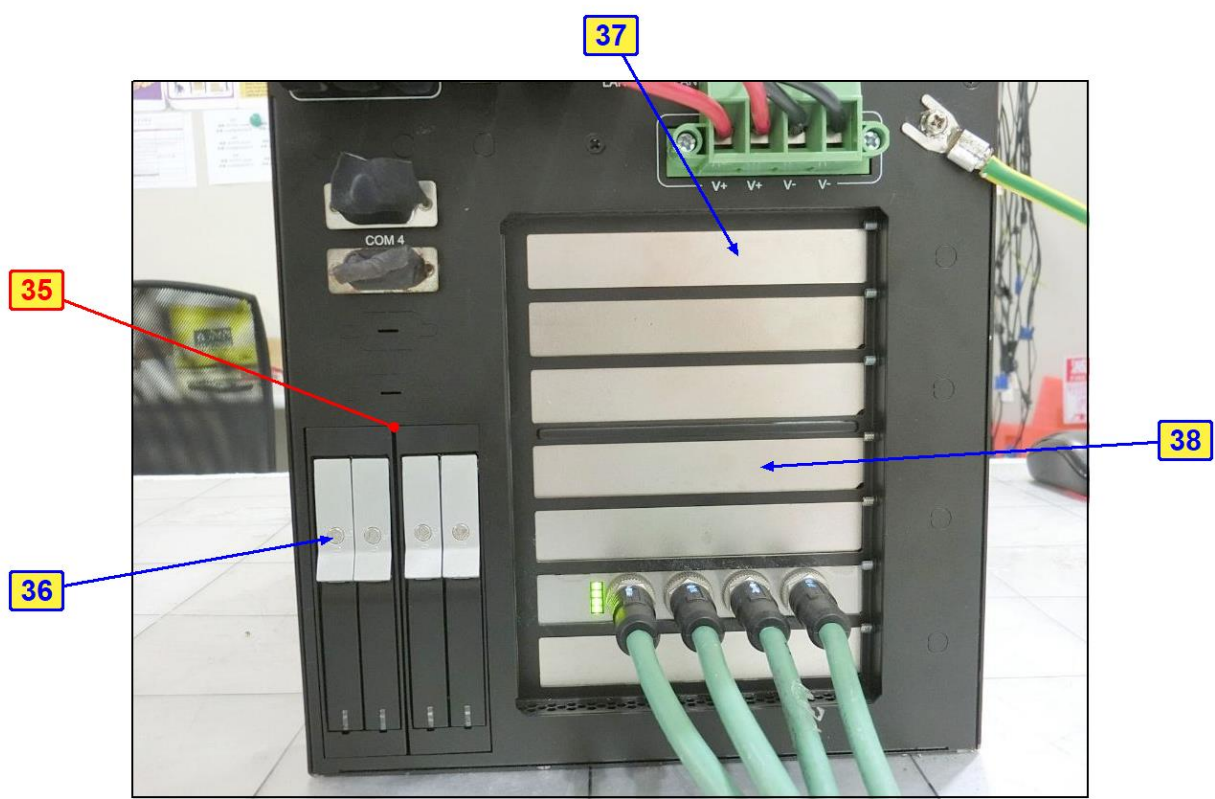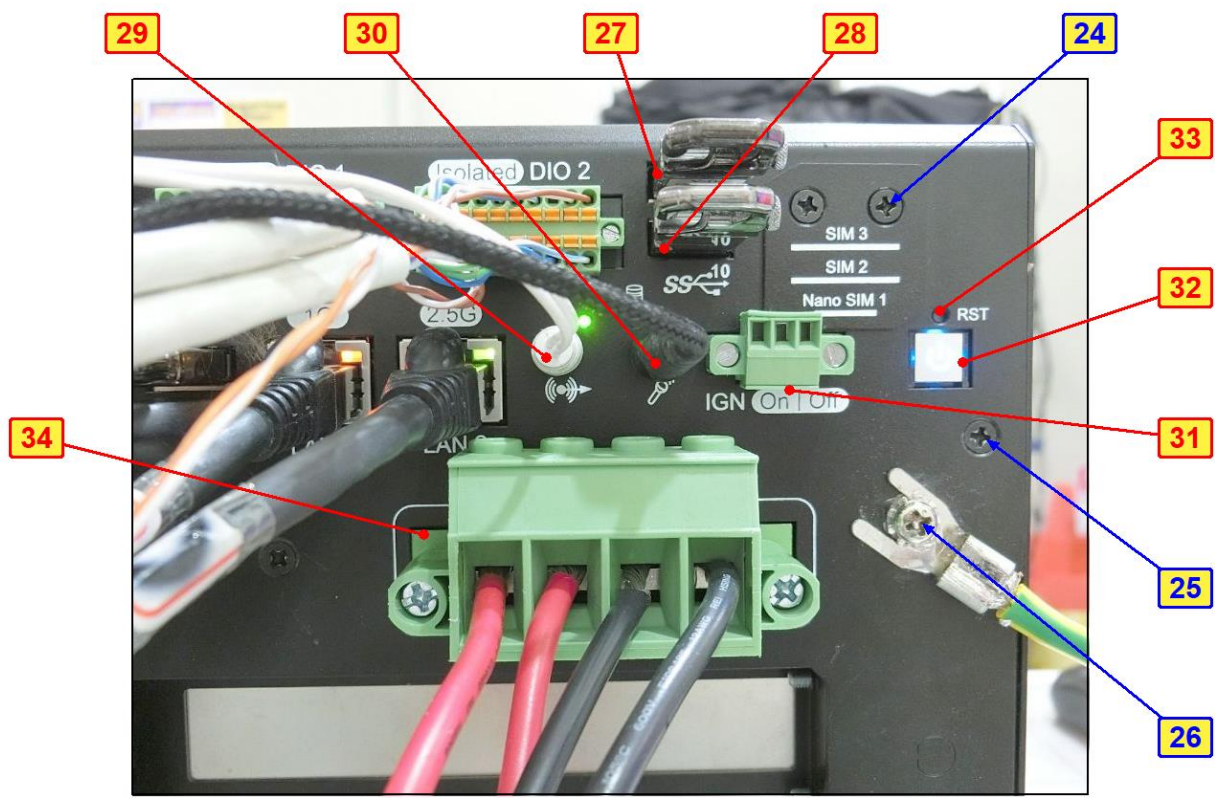

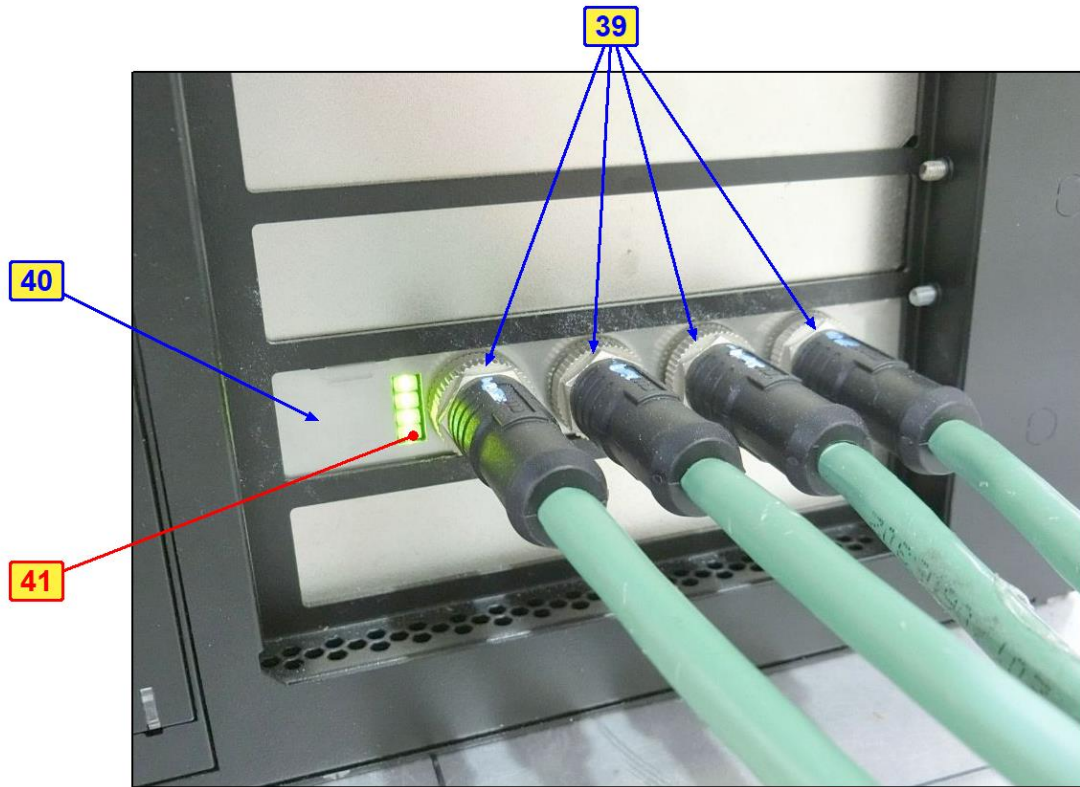

## 7.6 Radio Frequency Electromagnetic Field (RS)

### Mode A

#### For EN 55035

Input Power (System)	AC 230V / 50Hz	Environmental conditions	24 °C, 76 % RH 996 mbar
Tested by	Joey Liu		

Frequency (MHz)	Polarity	Azimuth(°)	Applied Field Strength		Observation	Performance Criteria
			(V/m)	Modulation		
80 - 1000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note 1	A
1800, 2600, 3500, 5000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note 1	A
80 - 1000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note 2	A
1800, 2600, 3500, 5000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note 2	A

#### Notes:

1. The EUT is operated normal during the test.
2. Audio Out Function (Speaker out) Acoustic Reference level Pass.

## 7.7 Fast Transients Common Mode (EFT)

### Mode A

#### For EN 55035

Input Power (System)	AC 230V / 50Hz	Environmental conditions	23 °C, 72 % RH 1000 mbar
Tested by	Joey Liu		

Wired network and signal/ control port				
Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criteria
0.5	LAN CARD Port 1	+/-	Note	A
0.5	LAN CARD Port 4	+/-	Note	A

Note: The EUT is operated normal during the test.



## 7.8 Radio Frequency Common Mode (CS)

### Mode A

#### For EN 55035

Input Power (System)	AC 230V / 50Hz	Environmental conditions	23 °C, 69 % RH 997 mbar
Tested by	Joey Liu		

Wired network and signal/ control port							
Frequency (MHz)	Level (V rms)	Modulation	Tested Line	Injection Method	Return Path	Observation	Performance Criteria
0.15 – 10	3	80% AM (1kHz)	LAN Card Port 1	CDN-ST08A	CDN-M3	Note 1	A
10 – 30	3~1	80% AM (1kHz)	LAN Card Port 1	CDN-ST08A	CDN-M3	Note 1	A
30 – 80	1	80% AM (1kHz)	LAN Card Port 1	CDN-ST08A	CDN-M3	Note 1	A
0.15 – 10	3	80% AM (1kHz)	LAN Card Port 4	CDN-ST08A	CDN-M3	Note 1	A
10 – 30	3~1	80% AM (1kHz)	LAN Card Port 4	CDN-ST08A	CDN-M3	Note 1	A
30 – 80	1	80% AM (1kHz)	LAN Card Port 4	CDN-ST08A	CDN-M3	Note 1	A
0.15 – 10	3	80% AM (1kHz)	LAN Card Port 1	CDN-ST08A	CDN-M3	Note 2	A
10 – 30	3~1	80% AM (1kHz)	LAN Card Port 1	CDN-ST08A	CDN-M3	Note 2	A
30 – 80	1	80% AM (1kHz)	LAN Card Port 1	CDN-ST08A	CDN-M3	Note 2	A
0.15 – 10	3	80% AM (1kHz)	LAN Card Port 4	CDN-ST08A	CDN-M3	Note 2	A
10 – 30	3~1	80% AM (1kHz)	LAN Card Port 4	CDN-ST08A	CDN-M3	Note 2	A
30 – 80	1	80% AM (1kHz)	LAN Card Port 4	CDN-ST08A	CDN-M3	Note 2	A

#### Notes:

1. The EUT is operated normal during the test.
2. Audio Out Function (Speaker out) Acoustic Reference level Pass.

## 7.9 Power Frequency Magnetic Field (PFMF)

### Mode A

#### For EN 55035

Input Power (System)	AC 230V / 50Hz	Environmental conditions	24 °C, 73 % RH 1001 mbar
Tested by	Joey Liu		

Application	Frequency (Hz)	Field Strength (A/m)	Observation	Performance Criteria
X - Axis	50	1	Note	A
Y - Axis	50	1	Note	A
Z - Axis	50	1	Note	A

Note: The EUT is operated normal during the test.

## Pictures of Test Arrangements

### 8.1 Conducted Emissions from Power Ports

#### Mode A & Mode B




## 8.2 Conducted Emissions from Wired Network Ports

### Mode A ~ Mode B




### 8.3 Radiated Emissions up to 1 GHz

#### Mode A

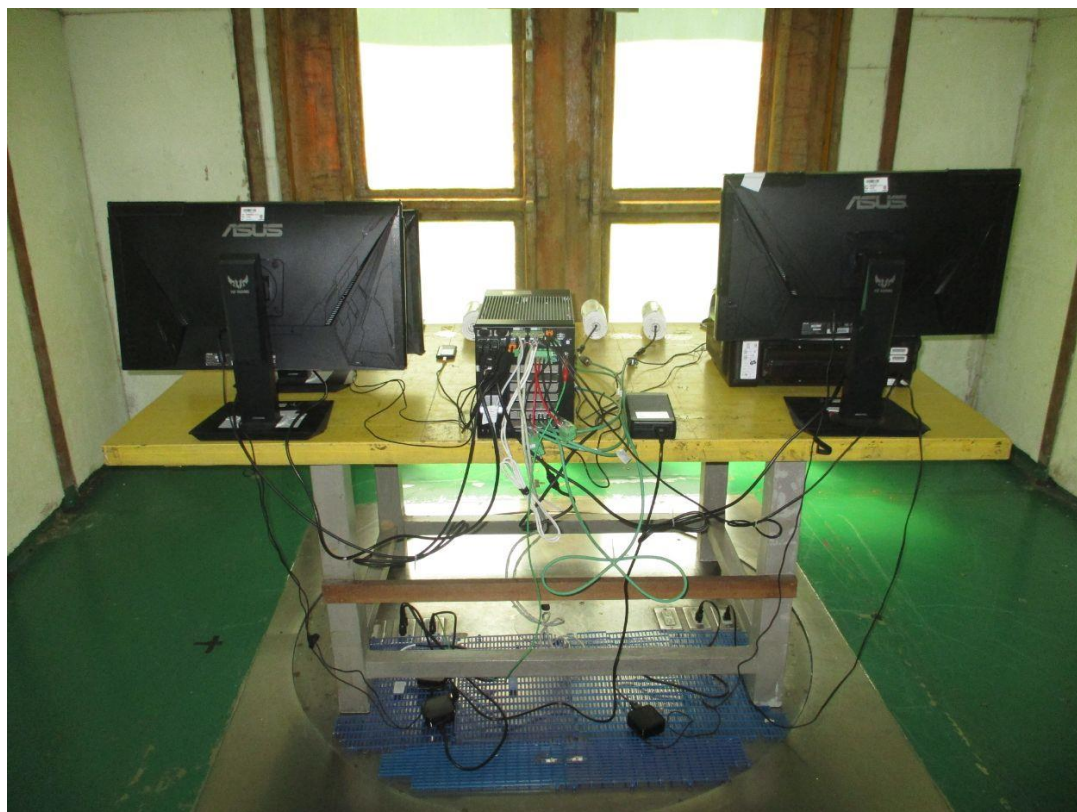


## 8.4 Radiated Emissions above 1 GHz

### Mode A

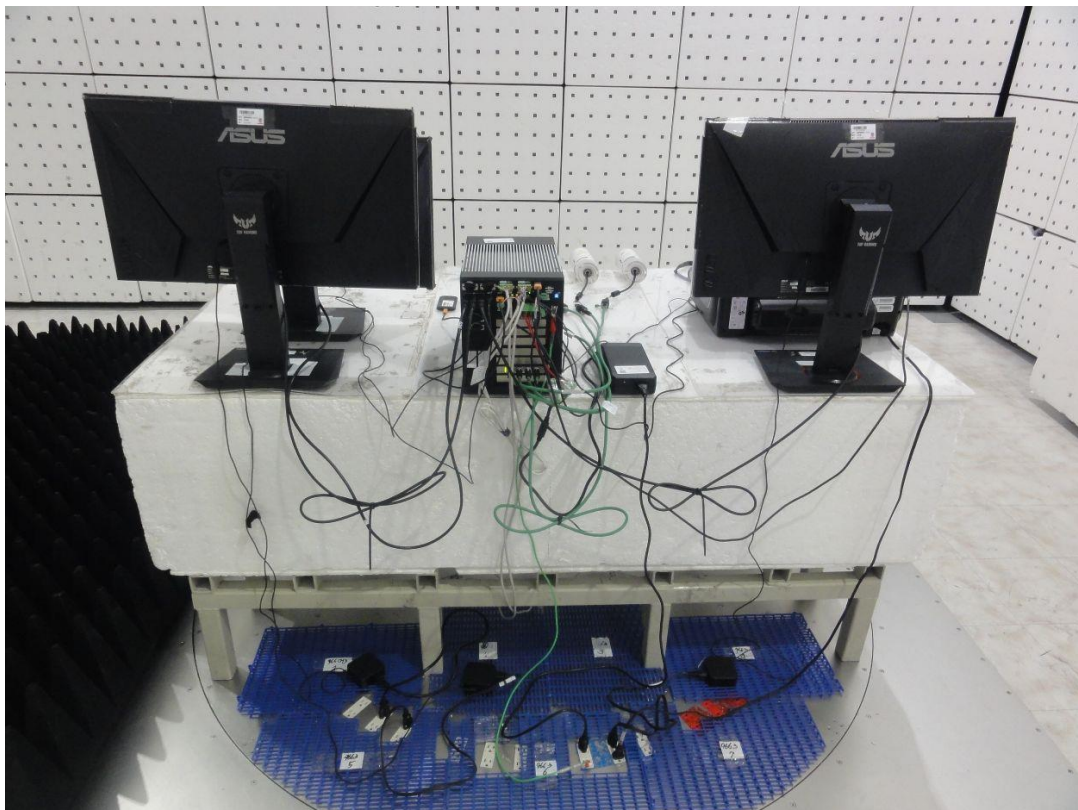

## 8.5 Electrostatic Discharges (ESD)

### Mode A

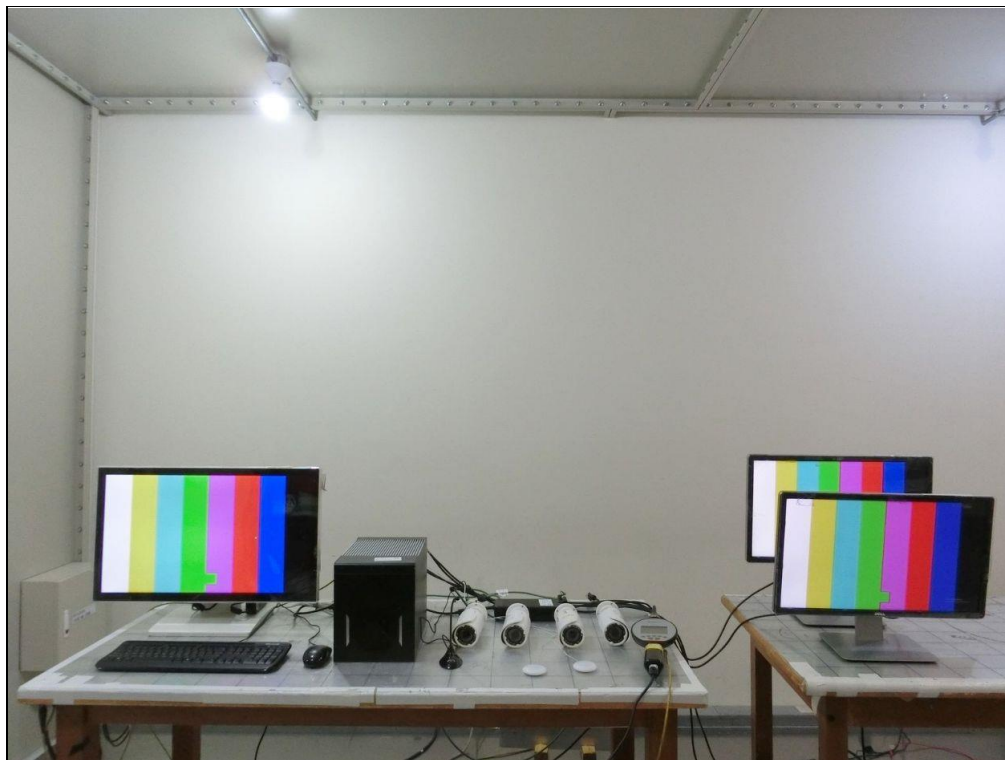

## 8.6 Radio Frequency Electromagnetic Field (RS)

### Mode A



## 8.7 Fast Transients Common Mode (EFT)

### Mode A

#### LAN Card






## 8.8 Radio Frequency Common Mode (CS)


### Mode A

LAN Card

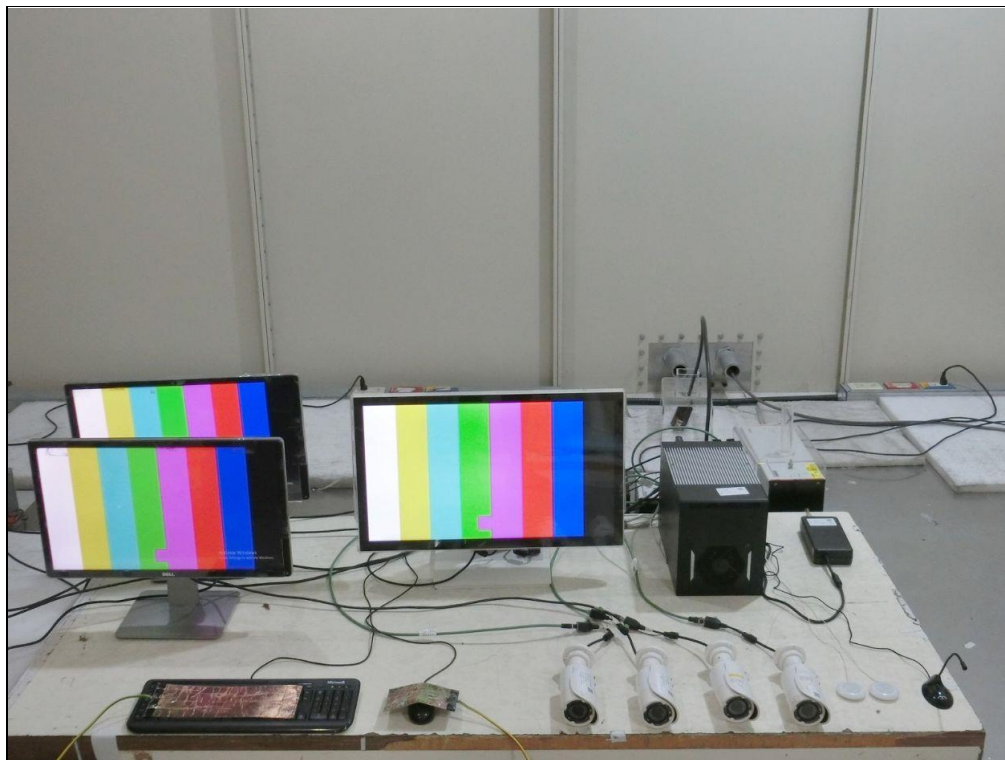

## 8.9 Power Frequency Magnetic Field (PFMF)

### Mode A

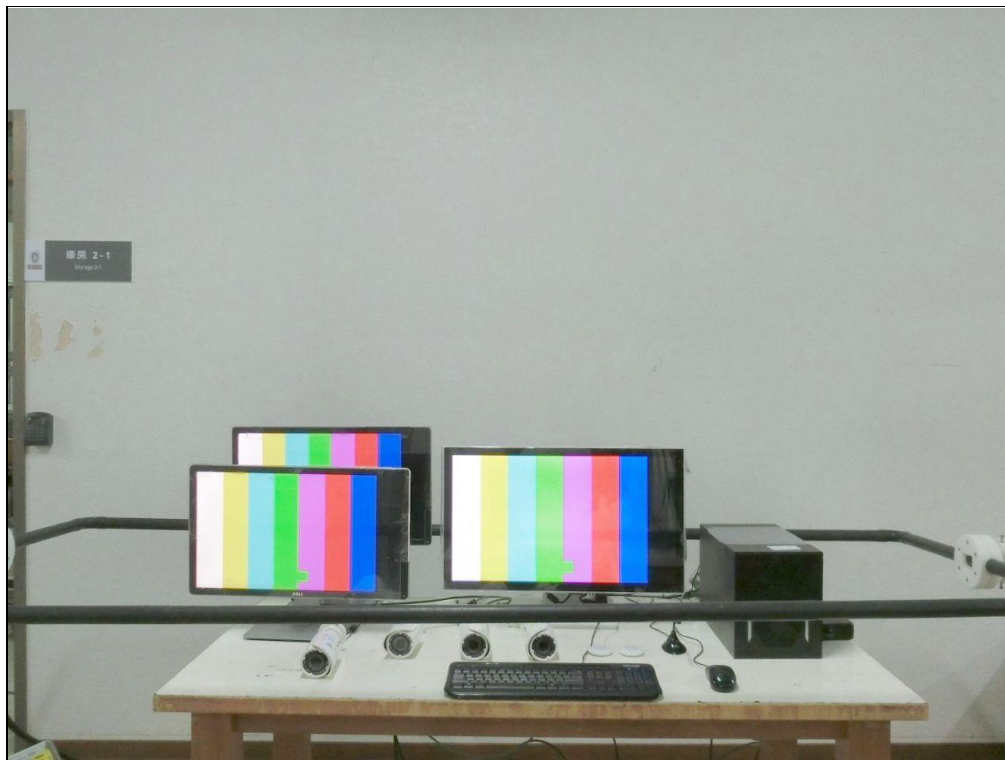

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---