





# **CE EMC Test Report**

Issued date: Jun. 03, 2025

Project No.: 24Q122702

**Product:** AI Computing System

**Model:** MIG-3000

**Series Model:** MIG-3XXXXXXXXXX ("X" can be 0-9, A-Z or blank)

**Applicant:** Vecow Co., Ltd

Address: 3F, No. 10, Jiankang Rd., Zhonghe Dist., New Taipei City 23586,

Taiwan

Report No: WD-EE-R-250171-A0

# According to

EN 55032: 2015 + A11: 2020, Class A IEC 61000-4-2: 2008 BS EN 55032: 2015 + A11: 2020 IEC 61000-4-3: 2020 CISPR 32: 2015 + COR1: 2016 IEC 61000-4-4: 2012

**EN 55032: 2015 + A1: 2020, Class A** IEC 61000-4-5: 2014 + A1: 2017

BS EN 55032: 2015 + A1: 2020 IEC 61000-4-6: 2023 CISPR 32: 2015 + A1: 2019 IEC 61000-4-8: 2009

**AS/NZS CISPR 32: 2015 + A1: 2020** IEC 61000-4-11: 2020 + COR2: 2022

EN 61000-3-2: 2014 EN 61000-4-2: 2009 EN IEC 61000-3-2: 2019 + A2: 2024 EN 61000-3-3: 2013 + A2: 2021 + AC: 2022 EN 61000-4-4: 2012

**BS EN 61000-3-2: 2014** EN 61000-4-5: 2014 + A1: 2017

**BS EN IEC 61000-3-2: 2019 + A2: 2024** EN IEC 61000-4-6: 2023 **BS EN 61000-3-3: 2013 + A2: 2021** EN 61000-4-8: 2010

**EN 55035: 2017 + A11: 2020** EN IEC 61000-4-11: 2020

BS EN 55035: 2017 + A11: 2020

Authorized Signatory : Much le

Ken Huang





Wendell Industrial Co., Ltd Wendell EMC & RF Laboratory

Add: 5F-1, No. 188, Baoqiao Road, Xindian District, New Taipei City 23145, Taiwan R.O.C.






# **Table of Contents**

|                | 2THICAU0H  |      |
|----------------|--|------|
| 1.1            | Summary of Result  | 8    |
| 2 La           | aboratory Information  | 9    |
| 2.1            | Measurement / Test Facility  | 9    |
| 2.2            | Measurement Uncertainty  | 10   |
| 2.2.1          | Conducted Emission Measurement   | 10   |
| 2.2.2          |  |      |
| 2.2.3          | Radiated Emission Measurement  | 10   |
| 3 G            | eneral Information   | . 11 |
|                | Description of Equipment Under Test  |      |
|                | Description of Equipment Charles Test  Description of Measurement / Test Modes |      |
|                | Description of Operating Condition   |      |
| 3.4            | Description of Associated Equipment  | . 13 |
| 3.5            | Configuration of Equipment Under Test  | . 14 |
| 4 Er           | nission Measurement  | 15   |
|                | Conducted Emission Measurement   |      |
|                |  |      |
| 4.1.1<br>4.1.2 |  |      |
| 4.1.3          |  |      |
| 4.1.4          |  |      |
| 4.1.5          |  |      |
| 4.1.6          | C C C C C C C C C C C C C C C C C C C  |      |
| 4.1.7          | Photographs of Measurement Configuration                                       | 23   |
| 4.2            | Conducted Emission at Telecommunication Port Measurement                       | 24   |
| 4.2.1          | Limit of Conducted Emission at Telecommunication Port Measurement              | 24   |
| 4.2.2          |  |      |
| 4.2.3          |  |      |
| 4.2.4          |  |      |
| 4.2.5<br>4.2.6 | $\epsilon$   |      |
| 4.2.0          |  |      |
|                | Radiated Emission Measurement  |      |
|                |  | _    |
| 4.3.1<br>4.3.2 |  |      |
| 4.3.2          |  |      |
| 4.3.4          |  | -    |
| 4.3.5          |  |      |
| 4.3.6          | Measurement Result   | 44   |
| 4.3.7          | Photographs of Measurement Configuration                                       | 48   |
| 4.4            | Harmonic Current Measurement   | . 50 |
| 4.4.1          | Limit of Harmonic Current Measurement  | 50   |
| 4.4.2          |  |      |
| 4.4.3          |  |      |
| 4.4.4          |  |      |
| 4.4.5          | $\mathcal{E}$  |      |
| 4.4.6          | Measurement Result   | 53   |





| 4.4.7          | Photographs of Measurement Configuration   | 54   |
|----------------|--|------|
| 4.5            | Voltage Fluctuations and Flicker Measurement   | . 55 |
| 4.5.1          |  |      |
| 4.5.2          |  |      |
| 4.5.3          | Measurement Procedure  | . 55 |
| 4.5.4          | Deviation from Standard  | . 55 |
| 4.5.5          | Measurement Configuration  | 56   |
| 4.5.6          |  |      |
| 4.5.7          | Photographs of Measurement Configuration   | . 58 |
| 5 In           | nmunity Test   | 50   |
| 5.1            | Standard Description   |      |
| 5.2            | Performance Criteria.  |      |
| 5.3            | Electrostatic Discharge Immunity Test  |      |
|                | ·  |      |
| 5.3.1          | *  |      |
| 5.3.2<br>5.3.3 |  | -    |
| 5.3.4          |  |      |
| 5.3.5          |  |      |
| 5.3.6          | e  |      |
| 5.3.7          |  |      |
| 5.4            | Radiated, Radio-frequency Electromagnetic Field Immunity Test  |      |
|                |  |      |
| 5.4.1<br>5.4.2 | L Company of the Comp |      |
| 5.4.2          |  |      |
| 5.4.4          |  |      |
| 5.4.5          |  |      |
| 5.4.6          |  |      |
| 5.4.7          |  |      |
| 5.5            | Electrical Fast Transient / Burst Immunity Test  |      |
| 5.5.1          | ·  |      |
| 5.5.2          | *  |      |
| 5.5.3          |  |      |
| 5.5.4          |  |      |
| 5.5.5          |  |      |
| 5.5.6          | $\boldsymbol{\varepsilon}$   |      |
| 5.5.7          |  |      |
| 5.6            | Surge Immunity Test  |      |
| 5.6.1          | ·  |      |
| 5.6.2          | •  |      |
| 5.6.3          |  |      |
| 5.6.4          |  |      |
| 5.6.5          |  |      |
| 5.6.6          | $\boldsymbol{\varepsilon}$   |      |
| 5.6.7          |  |      |
| 5.7            | Conducted Disturbances Immunity Test   |      |
| 5.7.1          | ·  |      |
| 5.7.2          | •  |      |
| 5.7.3          |  |      |
| 5.7.4          |  |      |







| 5.7.5 | Test Configuration                              | 90  |
|-------|---|-----|
| 5.7.6 | Test Result                                     | 91  |
| 5.7.7 | Photographs of Test Configuration               | 92  |
| 5.8 P | ower Frequency Magnetic Field Immunity Test     | 94  |
| 5.8.1 | Test Specification                              | 94  |
| 5.8.2 | Test Instrument                                 | 94  |
| 5.8.3 | Test Procedure                                  | 94  |
| 5.8.4 | Deviation from Standard                         | 94  |
| 5.8.5 | Test Configuration                              | 95  |
| 5.8.6 | Test Result                                     |     |
| 5.8.7 | Photographs of Test Configuration               | 97  |
| 5.9 V | oltage Dips & Short Interruptions Immunity Test | 98  |
| 5.9.1 | Test Specification                              | 98  |
| 5.9.2 | Test Instrument                                 | 98  |
| 5.9.3 | Test Procedure                                  | 99  |
| 5.9.4 | Deviation from Standard                         | 99  |
| 5.9.5 | Test Configuration                              | 100 |
| 5.9.6 | Test Result                                     |     |
| 5.9.7 | Photographs of Test Configuration               |     |



Report No: WD-EE-R-250171-A0



# History of this test report

| Report No.        | Issue date    | Description   |
|-------------------|---------------|---------------|
| WD-EE-R-250171-A0 | Jun. 03, 2025 | Initial Issue |

#### **Declaration**

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us.



Report No: WD-EE-R-250171-A0




# History of supplementary report

| Report No.        | Issue date    | Description     |
|-------------------|---------------|-----------------|
| WD-EE-R-250171-A0 | Jun. 03, 2025 | Original report |

#### **Declaration**

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us.







#### 1 Certification

**Product:** AI Computing System

**Brand Name:** Vecow

Model: MIG-3000

**Series Model:** MIG-3XXXXXXXXXX ("X" can be 0-9, A-Z or blank)

Applicant: Vecow Co., Ltd

**Tested:** May  $12 \sim \text{May } 27, 2025$ 

Standard: EN 55032: 2015 + A11: 2020, Class A

BS EN 55032: 2015 + A11: 2020 CISPR 32: 2015 + COR1: 2016 EN 55032: 2015 + A1: 2020, Class A BS EN 55032: 2015 + A1: 2020 CISPR 32: 2015 + A1: 2019

AS/NZS CISPR 32: 2015 + A1: 2020

EN 61000-3-2: 2014

EN IEC 61000-3-2: 2019 + A2: 2024

EN 61000-3-3: 2013 + A2: 2021 + AC: 2022

BS EN 61000-3-2: 2014

BS EN IEC 61000-3-2: 2019 + A2: 2024 BS EN 61000-3-3: 2013 + A2: 2021

EN 55035: 2017 + A11: 2020 BS EN 55035: 2017 + A11: 2020

IEC 61000-4-2: 2008 IEC 61000-4-3: 2020 IEC 61000-4-4: 2012

IEC 61000-4-5: 2014 + A1: 2017

IEC 61000-4-6: 2023 IEC 61000-4-8: 2009

IEC 61000-4-11: 2020 + COR2: 2022


EN 61000-4-2: 2009 EN IEC 61000-4-3: 2020 EN 61000-4-4: 2012

EN 61000-4-5: 2014 + A1: 2017

EN IEC 61000-4-6: 2023 EN 61000-4-8: 2010 EN IEC 61000-4-11: 2020

The above equipment (Model: MIG-3000) has been tested by **Wendell EMC & RF Laboratory**, and found compliance with the requirement of the above standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.








# 1.1 Summary of Result

The EUT has been tested according to the following specifications:

| Emission         |   |         |        |                        |
|------------------|---|---------|--------|------------------------|
| Standard         | Test Item                                       | Limit   | Result | Remark                 |
| EN 55032         | Conducted disturbance at mains power ports      | Class A | Pass   | Meets the requirements |
| CISPR 32         | Conducted disturbance at telecommunication port | Class A | Pass   | Meets the requirements |
| C101 K 32        | Radiated disturbance                            | Class A | Pass   | Meets the requirements |
| EN IEC 61000-3-2 | Harmonic current emission                       | Class A | Pass   | Meets the requirements |
| EN 61000-3-3     | Voltage fluctuations and flicker                | -       | Pass   | Meets the requirements |

| Immunity           |   |  |  |  |  |
|--------------------|---|--|--|--|--|
| Standard Test Item |   | Result   | Remark   |  |  |
| IEC 61000-4-2      | Electrostatic discharge                         | Pass   | Meets the requirements of<br>Performance Criterion B |  |  |
| IEC 61000-4-3      | Radiated, radio-frequency electromagnetic field | Pass   | Meets the requirements of<br>Performance Criterion A |  |  |
| IEC 61000-4-4      | Electrical fast transient / burst               | Pass Meets the requirements of Performance Criterion A |  |  |  |
| IEC 61000-4-5      | Surge   | Pass Meets the requirements of Performance Criterion A |  |  |  |
| IEC 61000-4-6      | Conducted disturbances                          | Pass   | Meets the requirements of<br>Performance Criterion A |  |  |
| IEC 61000-4-8      | Power frequency magnetic field                  | Pass   | Meets the requirements of<br>Performance Criterion A |  |  |
| IEC 61000-4-11     | Voltage dips and short interruptions            | Pass   | Meets the requirements of  Voltage Dips:             |  |  |

**Note:** Test record contained in the referenced test report relate only to the EUT sample and test item.







# 2 Laboratory Information

# 2.1 Measurement / Test Facility

Conducted disturbance at main power port, Conducted disturbance at telecommunication port, Harmonics, Flicker, ESD, EFT, Surge, CS, PFMF, DIP and Close Proximity Radiated fields test

W01: 5F-1, No.188, Baoqiao Rd., Xindian Dist., New Taipei City 23145, Taiwan (R.O.C)

#### RS, ESD and Surge test


W05: 1F-7, No.188, Baoqiao Rd., Xindian Dist., New Taipei City 23145, Taiwan (R.O.C)

Conducted disturbance at main power port, Conducted disturbance at telecommunication port, Radiated disturbance (9\*6\*6 Chamber) and ESD test

W08: No.119, Wugong 3rd Rd., Wugu Dist., New Taipei City 248, Taiwan (R.O.C)

#### **ACCREDITATIONS**

The laboratories are accredited and approved by the TAF according to ISO/IEC 17025.







### 2.2 Measurement Uncertainty

The measurement instrumentation uncertainty is evaluated according to CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Wendell EMC & RF Laboratory  $U_{\text{lab}}$  is less than  $U_{\text{cispr}}$ , therefore compliance or non-compliance with a disturbance limit shall be determined in the following manner.

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

Please note that the measurement uncertainty ( $U_{\rm lab}$ ) is provided for informational purpose only and is not used in determining the Pass/Fail results.

#### 2.2.1 Conducted Emission Measurement

| Test Site | Frequency Range  | dB (U <sub>lab</sub> ) | Note |
|-----------|------------------|------------------------|------|
| W01-CE    | 150 kHz ~ 30 MHz | 2.84                   | LISN |
| W08-CE    | 150 kHz ~ 30 MHz | 2.72                   | LISN |

#### 2.2.2 Conducted Emission at Telecommunication Port Measurement

| Test Site | Frequency Range  | dB (U <sub>lab</sub> ) | Note          |
|-----------|------------------|------------------------|---------------|
| W01-CE    | 150 kHz ~ 30 MHz | 2.85                   | ISN           |
| W01-CE    | 150 kHz ~ 30 MHz | 2.11                   | Current Probe |
| W08-CE    | 150 kHz ~ 30 MHz | 2.64                   | ISN           |

#### 2.2.3 Radiated Emission Measurement

| Test Site | Frequency Range    | Ant | dB (U <sub>lab</sub> ) | Note |
|-----------|--------------------|-----|------------------------|------|
|           | 30 MHz ~ 200 MHz   | V   | 3.50                   | N/A  |
|           | 30 MHz ~ 200 MHz   | Н   | 2.96                   | N/A  |
| W00 066 1 | 200 MHz ~ 1000 MHz | V   | 5.09                   | N/A  |
| W08-966-1 | 200 MHz ~ 1000 MHz | Н   | 3.41                   | N/A  |
|           | 1 GHz ~ 6 GHz      | V   | 4.37                   | N/A  |
|           | 1 GHz ~ 6 GHz      | Н   | 4.30                   | N/A  |





# **3** General Information

# 3.1 Description of Equipment Under Test

| Product                  | AI Computing System  |
|--------------------------|--|
| Brand                    | Vecow  |
| Model                    | MIG-3000   |
| Series Model             | MIG-3XXXXXXXXXX ("X" can be 0-9, A-Z or blank)   |
| Applicant                | Vecow Co., Ltd   |
| Received Date            | Jan. 03, 2025  |
| <b>EUT Power Rating</b>  | 24Vdc (from adapter)   |
| <b>Model Differences</b> | The models are electrically identical, different models no. are for marketing purpose. The series model information is provided by client. |
| <b>Operating System</b>  | Windows 11 Professional version: 24H2  |
| Data Cable Supplied      | N/A  |
| <b>Accessory Device</b>  | N/A  |
| I/O Port                 | Please refer to the User's Manual  |

#### Note:


1. The EUT uses the follow adapter:

| Adapter (support unit only) |   |  |
|-----------------------------|---|--|
| Brand LITEON                |   |  |
| Model PA-1181-28E           |   |  |
| Input Power                 | 100-240Vac, 2.34A, 50-60Hz  |  |
| Output Power 24Vdc, 7.5A    |   |  |
| Power line                  | Input: 1.8m non-shielded cable Output: 1m non-shielded cable with 2 cores |  |

2. The EUT contains following components.

| Item    | Brand    | Model                           | Spec.                            | Qty. |
|---------|----------|---------------------------------|----------------------------------|------|
| CPU     | Intel    | 13th Gen Intel® Core™ i7-13700E | 1.80 GHz                         | 1    |
| RAM     | innodisk | M5D0-BGS2Q5VP-H03               | 32GB DDR5 4800 W/T<br>ECC SODIMM | 2    |
| M.2 SSD | innodisk | DEM24-C12DD1KCCQF-H03           | M.2(P42) 3TE6 512GB              | 1    |

3. The EUT's highest operating frequency is 1800MHz. Therefore the radiated emission is tested up to 6GHz.








# 3.2 Description of Measurement / Test Modes

Test results are presented in the report as below.

| Test Mode | Measurement / Test Condition                             |  |  |  |  |  |
|-----------|--|--|--|--|--|--|
|           | Conducted Emission Measurement                           |  |  |  |  |  |
| -         | AC-DC Adapter mode                                       |  |  |  |  |  |
|           | Conducted Emission at Telecommunication Port Measurement |  |  |  |  |  |
| A         | AC-DC Adapter mode, LAN (10Mbps/100Mbps/1Gbps)           |  |  |  |  |  |
| В         | AC-DC Adapter mode, LAN (100Mbps/1Gbps/2.5Gbps)          |  |  |  |  |  |
|           | Radiated Emission 30MHz ~ 1GHz Measurement               |  |  |  |  |  |
| -         | AC-DC Adapter mode                                       |  |  |  |  |  |
|           | Radiated Emission above 1GHz Measurement                 |  |  |  |  |  |
| -         | AC-DC Adapter mode                                       |  |  |  |  |  |
|           | Harmonic & Flicker Measurement                           |  |  |  |  |  |
| -         | AC-DC Adapter mode                                       |  |  |  |  |  |
|           | Immunity Test  |  |  |  |  |  |
| -         | AC-DC Adapter mode                                       |  |  |  |  |  |

# 3.3 Description of Operating Condition

- a. The EUT placed on test table.
- b. Prepare PC to act as a communication partner and placed it outside of testing area.
- c. The EUT was connected to the PC with LAN cable.
- d. The communication partner sent data to EUT by command "ping" via LAN.
- e. The EUT read / write data with Internal SSD & External SSD.
- f. The EUT run test program BurnIN.exe to enable all functions.
- g. The EUT sent Color Bar ITU-R.BT471-1 signal to monitor and displayed on screen.
- h. The microphone sent voice signal to EUT.
- i. The EUT sent voice signal to earphone.







# 3.4 Description of Associated Equipment

The EUT has been conducted testing with other necessary accessories or support units.

| Item | Equipment                        | Brand     | Model No.         | Serial No.                       | FCC ID               | Data Cable                                  | Power Cable                       | Remark             |
|------|----------------------------------|-----------|-------------------|----------------------------------|----------------------|---|-----------------------------------|--------------------|
| 1    | Desktop PC                       | DELL      | D19M              | N/A                              | PPD-QCNF<br>A335     | 15m CAT.6A<br>shielded LAN<br>cable         | AC: 1.8m<br>non-shielded<br>cable | -                  |
| 2    | Desktop PC                       | DELL      | D24M              | N/A                              | PD93165NG            | 15m CAT.6A<br>shielded LAN<br>cable         | AC: 1.8m<br>non-shielded<br>cable | -                  |
| 3    | 4K Monitor                       | ASUS      | XG27UCS           | S5LMTF2007<br>65                 | FCC SDoC<br>Approved | 1.5m shielded<br>HDMI cable<br>with 2 cores | AC: 1.8m<br>non-shielded<br>cable | -                  |
| 4    | 4K Monitor                       | ASUS      | XG27UCS           | S7LMT011954                      | FCC SDoC<br>Approved | 1.7m shielded<br>DP cable                   | AC: 1.8m<br>non-shielded<br>cable | -                  |
| 5    | Keyboard                         | DELL      | KB216t            | CN-0W33XP-<br>L0300<br>-7C1-15UP | FCC SDoC<br>Approved | 1.5m<br>non-shielded<br>USB cable           | N/A                               | -                  |
| 6    | Mouse                            | DELL      | MS116             | CN-0DV0RH-<br>L0300<br>-7C1-15UP | FCC SDoC<br>Approved | 1.5m<br>non-shielded<br>USB cable           | N/A                               | -                  |
| 7    | Earphone & Microphone            | Avier     | AEP-MM            | N/A                              | N/A                  | 1.2m<br>non-shielded<br>audio cable         | N/A                               | -                  |
| 8    | External<br>Portable SSD<br>(x2) | Transcend | TS120GES<br>D240C | F96474-0001                      | FCC SDoC<br>Approved | 1m shielded<br>USB cable                    | N/A                               | -                  |
| 9    | Grounding wire                   | N/A       | N/A               | N/A                              | N/A                  | 1m<br>non-shielded<br>cable                 | N/A                               | -                  |
| 10   | RS232 terminator (x2)            | N/A       | N/A               | N/A                              | N/A                  | N/A   | N/A                               | Supplied by client |

**Note:** 1. The core(s) is(are) originally attached to the cable(s).


2. Item 1-2 acted as communication partners to transfer data.



Report No: WD-EE-R-250171-A0



# 3.5 Configuration of Equipment Under Test

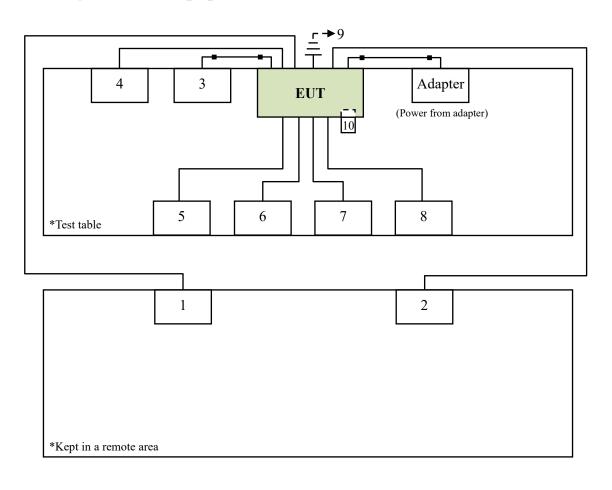





# **4 Emission Measurement**

# 4.1 Conducted Emission Measurement

#### 4.1.1 Limit of Conducted Emission Measurement

#### Class A equipment:

| Requirements for conducted emissions from the AC mains power ports of Class A equipment |                 |                             |                |  |  |  |
|---|-----------------|-----------------------------|----------------|--|--|--|
|   | Me              | asurement                   | Class A limits |  |  |  |
| Frequency (MHz)   | Coupling device | Detector type/<br>bandwidth | dB(μV)         |  |  |  |
| 0.15 to 0.5   | AMN             | Quasi Peak / 9 kHz          | 79             |  |  |  |
| 0.5 to 30   | AIVIIN          | Quasi Feak / 9 kHZ          | 73             |  |  |  |
| 0.15 to 0.5   | AMN             | Average / 9 kHz             | 66             |  |  |  |
| 0.5 to 30   | AIVIIN          | Average / 9 KHZ             | 60             |  |  |  |

#### Class B equipment:

| Requirements for conducted emissions from the AC mains power ports of Class B equipment |                 |                             |                |  |  |  |
|---|-----------------|-----------------------------|----------------|--|--|--|
|   | Me              | asurement                   | Class B limits |  |  |  |
| Frequency (MHz)   | Coupling device | Detector type/<br>bandwidth | dB(μV)         |  |  |  |
| 0.15 to 0.5   |                 |                             | 66 to 56*      |  |  |  |
| 0.5 to 5  | AMN             | Quasi Peak / 9 kHz          | 56             |  |  |  |
| 5 to 30   |                 |                             | 60             |  |  |  |
| 0.15 to 0.5   |                 |                             | 56 to 46*      |  |  |  |
| 0.5 to 5  | AMN             | Average / 9 kHz             | 46             |  |  |  |
| 5 to 30   |                 |                             | 50             |  |  |  |

<sup>\*</sup> Decreases with the logarithm of the frequency.

**Note:** 1. The lower limit shall apply at the transition frequencies.

- 2. Detector function in the form: QP = Quasi Peak, AVG = Average
- 3. The result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = LISN Factor + Cable Loss + Transient Limiter (If use)

Margin Level = Measurement Value – Limit Value

4. Applicable to AC mains power ports.






# **4.1.2** Measurement Instrument

|      | Test Site: W01-CE                 |              |                        |            |                        |  |  |  |  |
|------|-----------------------------------|--------------|------------------------|------------|------------------------|--|--|--|--|
| Item | Equipment                         | Manufacturer | Model                  | Meter No.  | Calibration<br>Date    |  |  |  |  |
| 1    | TWO-LINE<br>V-NETWORK             | R&S          | ENV216                 | CT-1-025-1 | Apr. 26, 2025          |  |  |  |  |
| 2    | Pulse limiter                     | R&S          | ESH3-Z2                | CT-2-015   | Apr. 23, 2025          |  |  |  |  |
| 3    | EMI Test<br>Receiver              | R&S          | ESCI                   | CT-1-024   | Apr. 18, 2025          |  |  |  |  |
| 4    | Artificial Mains<br>Network (AMN) | SCHWARZBECK  | NSLK 8127              | CT-1-104-1 | Apr. 26, 2025          |  |  |  |  |
| 5    | RF Cable                          | MVE          | 200200.400LL<br>.500A  | CT-9-101   | Apr. 23, 2025          |  |  |  |  |
| 6    | 50ohm<br>Termination              | N/A          | N/A                    | CT-1-065-1 | Apr. 26, 2025          |  |  |  |  |
| 7    | Measurement<br>Software           | EZ-EMC       | Ver:<br>EMC-CON<br>3A1 | CT-3-012   | No calibration request |  |  |  |  |

**Note:** 1. The calibration interval of the above test instruments is 12 months.

|      | Test Site: W08-CE                 |                 |                          |                  |                        |  |  |  |  |
|------|-----------------------------------|-----------------|--------------------------|------------------|------------------------|--|--|--|--|
| Item | Equipment                         | Manufacturer    | Model                    | Meter No.        | Calibration<br>Date    |  |  |  |  |
| 1    | TWO-LINE<br>V-NETWORK             | R&S             | ENV216                   | CT-1-025-2       | Jun. 20, 2024          |  |  |  |  |
| 2    | RF Cable                          | EMCI            | EMCCFD300-<br>BM-BM-5000 | CT-1-107-2       | Jun. 24, 2024          |  |  |  |  |
| 3    | EMI Test<br>Receiver              | R&S             | ESR3                     | CT-1-103         | Jun. 20, 2024          |  |  |  |  |
| 4    | Artificial Mains<br>Network (AMN) | SCHWARZBECK     | NSLK 8127<br>RC          | CT-1-104-1R<br>C | Jun. 20, 2024          |  |  |  |  |
| 5    | Transient Limiter                 | Electro-Metrics | EM-7600                  | CT-1-026         | Jun. 24, 2024          |  |  |  |  |
| 6    | 50ohm<br>Termination              | N/A             | N/A                      | CT-1-109-1       | Jun. 20, 2024          |  |  |  |  |
| 7    | Measurement<br>Software           | EZ-EMC          | Ver:<br>EMC-CON<br>3A1   | CT-3-012         | No calibration request |  |  |  |  |

**Note:** 1. The calibration interval of the above test instruments is 12 months.







#### **4.1.3 Measurement Procedure**

- a. The table-top equipment under test was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The floor-standing equipment under test was placed insulation support unit from the horizontal ground plane. The LISN at least be 0.8 meter from nearest chassis of equipment under test.
- b. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All associated equipment powered from additional LISN(s).
- c. Interrelating cables that hang closer than 0.4 meter to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
- d. The loads and/or devices simulating typical operating conditions shall be connected to at least one of each type of interface port of the equipment under test. If loading (or terminating) with a device of actual usage is not feasible, the port should be loaded with a simulator. Where these options are not practical the port shall be loaded by the application of a typical impedance considering both the common and differential modes.
- e. The EMI test receiver connected to the line impedance stabilization network (LISN) powering the equipment. The measurements shall be limited to the operating ranges of voltage and frequency as specified for the equipment under test, having regard to the supply voltage and frequency for the intended market of the equipment under test.
- f. The EMI test receiver scanned from 150kHz to 30MHz for emissions in each of modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emission amplitude.
- g. The equipment under test and cable configuration of the above highest emission amplitude were recorded.

#### 4.1.4 Deviation from Standard


No deviation






# 4.1.5 Measurement Configuration


#### < Table-Top equipment under test >

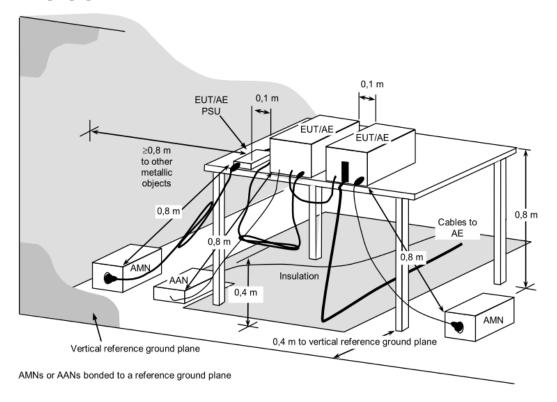

# < Floor-Standing equipment under test >

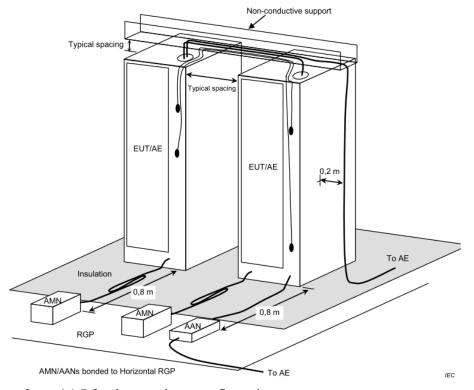

**Note:** Please refer to 4.1.7 for the actual test configuration.








# 4.1.6 Measurement Result


| Test Voltage             | 230Vac, 50Hz | Frequency Range | 0.15 ~ 30 MHz |
|--------------------------|--------------|-----------------|---------------|
| Environmental Conditions | 21°C, 50% RH | 6dB Bandwidth   | 9 kHz         |
| Test Date                | 2025/05/23   | Phase           | L             |
| Tested by                | Guanwei Liao | Test Site       | W01-CE        |

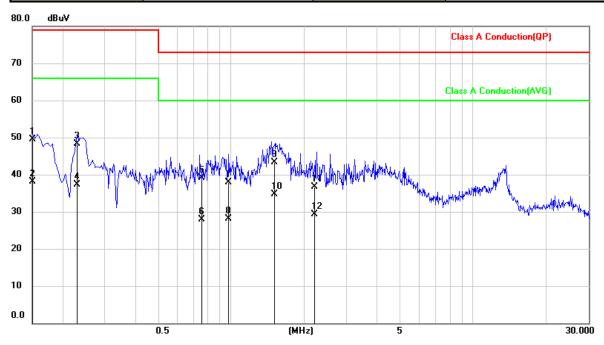

| No. | Frequency (MHz) | Reading Level<br>(dBµV) | Correct Factor (dB) | Measurement (dBμV) | Limit<br>(dBµV) | Margin<br>(dB) | Detector |
|-----|-----------------|-------------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.1515          | 39.60                   | 9.91                | 49.51              | 79.00           | -29.49         | QP       |
| 2   | 0.1515          | 28.17                   | 9.91                | 38.08              | 66.00           | -27.92         | AVG      |
| 3   | 0.2309          | 38.31                   | 9.91                | 48.22              | 79.00           | -30.78         | QP       |
| 4   | 0.2309          | 27.45                   | 9.91                | 37.36              | 66.00           | -28.64         | AVG      |
| 5   | 0.7568          | 29.16                   | 9.94                | 39.10              | 73.00           | -33.90         | QP       |
| 6   | 0.7568          | 18.02                   | 9.94                | 27.96              | 60.00           | -32.04         | AVG      |
| 7   | 0.9740          | 28.00                   | 9.94                | 37.94              | 73.00           | -35.06         | QP       |
| 8   | 0.9740          | 18.07                   | 9.94                | 28.01              | 60.00           | -31.99         | AVG      |
| 9   | 1.5043          | 33.40                   | 9.95                | 43.35              | 73.00           | -29.65         | QP       |
| 10  | 1.5043          | 24.73                   | 9.95                | 34.68              | 60.00           | -25.32         | AVG      |
| 11  | 2.2052          | 26.79                   | 9.97                | 36.76              | 73.00           | -36.24         | QP       |
| 12  | 2.2052          | 19.37                   | 9.97                | 29.34              | 60.00           | -30.66         | AVG      |

- Remark: 1. QP = Quasi Peak, AVG = Average
  2. Correct Factor = LISN Factor + Cable Loss + Transient Limiter (If use)
  3. Measurement Value = Reading Level + Correct Factor


  - 4. Margin Level = Measurement Value Limit Value








| Test Voltage                    | 230Vac, 50Hz | Frequency Range | $0.15 \sim 30 \text{ MHz}$ |
|---------------------------------|--------------|-----------------|----------------------------|
| <b>Environmental Conditions</b> | 21°C, 50% RH | 6dB Bandwidth   | 9 kHz                      |
| <b>Test Date</b>                | 2025/05/23   | Phase           | N                          |
| Tested by                       | Guanwei Liao | Test Site       | W01-CE                     |

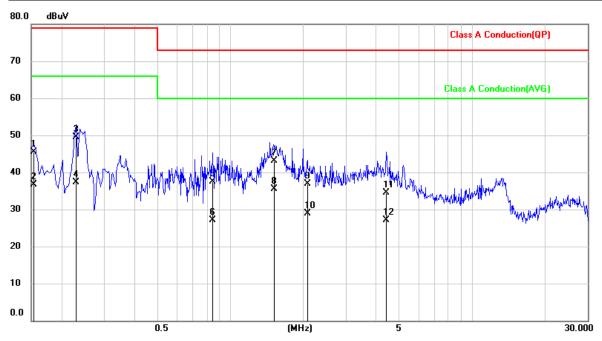

| No. | Frequency<br>(MHz) | Reading Level (dBµV) | Correct Factor (dB) | Measurement (dBμV) | Limit<br>(dBµV) | Margin<br>(dB) | Detector |
|-----|--------------------|----------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.1545             | 35.64                | 9.91                | 45.55              | 79.00           | -33.45         | QP       |
| 2   | 0.1545             | 26.85                | 9.91                | 36.76              | 66.00           | -29.24         | AVG      |
| 3   | 0.2292             | 39.58                | 9.90                | 49.48              | 79.00           | -29.52         | QP       |
| 4   | 0.2292             | 27.41                | 9.90                | 37.31              | 66.00           | -28.69         | AVG      |
| 5   | 0.8427             | 27.48                | 9.94                | 37.42              | 73.00           | -35.58         | QP       |
| 6   | 0.8427             | 17.26                | 9.94                | 27.20              | 60.00           | -32.80         | AVG      |
| 7   | 1.5248             | 33.17                | 9.96                | 43.13              | 73.00           | -29.87         | QP       |
| 8   | 1.5248             | 25.59                | 9.96                | 35.55              | 60.00           | -24.45         | AVG      |
| 9   | 2.0854             | 26.96                | 9.98                | 36.94              | 73.00           | -36.06         | QP       |
| 10  | 2.0854             | 19.00                | 9.98                | 28.98              | 60.00           | -31.02         | AVG      |
| 11  | 4.4351             | 24.38                | 10.07               | 34.45              | 73.00           | -38.55         | QP       |
| 12  | 4.4351             | 17.12                | 10.07               | 27.19              | 60.00           | -32.81         | AVG      |


- Remark: 1. QP = Quasi Peak, AVG = Average
  2. Correct Factor = LISN Factor + Cable Loss + Transient Limiter (If use)
  3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value








| Test Voltage                    | 110Vac, 60Hz | Frequency Range | $0.15 \sim 30 \text{ MHz}$ |
|---------------------------------|--------------|-----------------|----------------------------|
| <b>Environmental Conditions</b> | 21°C, 50% RH | 6dB Bandwidth   | 9 kHz                      |
| <b>Test Date</b>                | 2025/05/23   | Phase           | L                          |
| Tested by                       | Guanwei Liao | Test Site       | W01-CE                     |

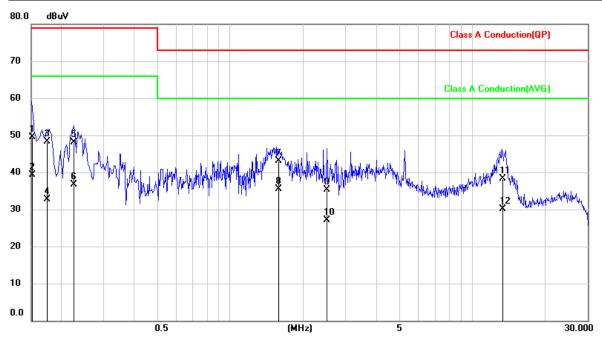

| No. | Frequency (MHz) | Reading Level (dBµV) | Correct Factor (dB) | Measurement (dBμV) | Limit<br>(dBµV) | Margin<br>(dB) | Detector |
|-----|-----------------|----------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.1518          | 39.66                | 9.91                | 49.57              | 79.00           | -29.43         | QP       |
| 2   | 0.1518          | 29.38                | 9.91                | 39.29              | 66.00           | -26.71         | AVG      |
| 3   | 0.1739          | 38.44                | 9.91                | 48.35              | 79.00           | -30.65         | QP       |
| 4   | 0.1739          | 22.74                | 9.91                | 32.65              | 66.00           | -33.35         | AVG      |
| 5   | 0.2262          | 38.14                | 9.91                | 48.05              | 79.00           | -30.95         | QP       |
| 6   | 0.2262          | 26.82                | 9.91                | 36.73              | 66.00           | -29.27         | AVG      |
| 7   | 1.5871          | 33.11                | 9.96                | 43.07              | 73.00           | -29.93         | QP       |
| 8   | 1.5871          | 25.62                | 9.96                | 35.58              | 60.00           | -24.42         | AVG      |
| 9   | 2.5073          | 25.37                | 9.98                | 35.35              | 73.00           | -37.65         | QP       |
| 10  | 2.5073          | 17.06                | 9.98                | 27.04              | 60.00           | -32.96         | AVG      |
| 11  | 13.3552         | 28.17                | 10.22               | 38.39              | 73.00           | -34.61         | QP       |
| 12  | 13.3552         | 19.79                | 10.22               | 30.01              | 60.00           | -29.99         | AVG      |


- Remark: 1. QP = Quasi Peak, AVG = Average
  2. Correct Factor = LISN Factor + Cable Loss + Transient Limiter (If use)
  3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value








| Test Voltage                    | 110Vac, 60Hz | Frequency Range | $0.15 \sim 30 \text{ MHz}$ |
|---------------------------------|--------------|-----------------|----------------------------|
| <b>Environmental Conditions</b> | 21°C, 50% RH | 6dB Bandwidth   | 9 kHz                      |
| Test Date                       | 2025/05/23   | Phase           | N                          |
| Tested by                       | Guanwei Liao | Test Site       | W01-CE                     |

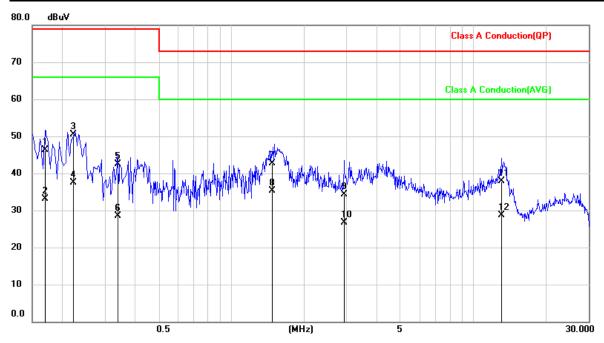

| No. | Frequency<br>(MHz) | Reading Level<br>(dBµV) | Correct Factor (dB) | Measurement (dBμV) | Limit<br>(dBµV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.1686             | 36.31                   | 9.91                | 46.22              | 79.00           | -32.78         | QP       |
| 2   | 0.1686             | 23.26                   | 9.91                | 33.17              | 66.00           | -32.83         | AVG      |
| 3   | 0.2220             | 40.61                   | 9.90                | 50.51              | 79.00           | -28.49         | QP       |
| 4   | 0.2220             | 27.56                   | 9.90                | 37.46              | 66.00           | -28.54         | AVG      |
| 5   | 0.3396             | 32.55                   | 9.91                | 42.46              | 79.00           | -36.54         | QP       |
| 6   | 0.3396             | 18.67                   | 9.91                | 28.58              | 66.00           | -37.42         | AVG      |
| 7   | 1.4731             | 32.67                   | 9.96                | 42.63              | 73.00           | -30.37         | QP       |
| 8   | 1.4731             | 25.26                   | 9.96                | 35.22              | 60.00           | -24.78         | AVG      |
| 9   | 2.9475             | 24.37                   | 10.01               | 34.38              | 73.00           | -38.62         | QP       |
| 10  | 2.9475             | 16.67                   | 10.01               | 26.68              | 60.00           | -33.32         | AVG      |
| 11  | 13.0530            | 27.55                   | 10.26               | 37.81              | 73.00           | -35.19         | QP       |
| 12  | 13.0530            | 18.49                   | 10.26               | 28.75              | 60.00           | -31.25         | AVG      |

- Remark: 1. QP = Quasi Peak, AVG = Average
  2. Correct Factor = LISN Factor + Cable Loss + Transient Limiter (If use)
  3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value







# 4.1.7 Photographs of Measurement Configuration









#### 4.2 Conducted Emission at Telecommunication Port Measurement

# **4.2.1** Limit of Conducted Emission at Telecommunication Port Measurement

#### Class A equipment:

| Requirements for asymmetric mode conducted emissions from Class A equipment |                 |                             |                |  |  |
|---|-----------------|-----------------------------|----------------|--|--|
|   | Me              | asurement                   | Class A limits |  |  |
| Frequency (MHz)   | Coupling device | Detector type/<br>bandwidth | dB(μV)         |  |  |
| 0.15 to 0.5   | AAN             | Quasi Peak / 9 kHz          | 97 to 87*      |  |  |
| 0.5 to 30   | AAN             | Quasi i cak / 9 ki iz       | 87             |  |  |
| 0.15 to 0.5   | AAN             | Average / 9 kHz             | 84 to 74*      |  |  |
| 0.5 to 30   | AAN             | Average / 9 KHZ             | 74             |  |  |

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### Class B equipment:

| Requirements for asymmetric mode conducted emissions from Class B equipment |                 |                             |                |  |  |  |
|---|-----------------|-----------------------------|----------------|--|--|--|
|   | Me              | asurement                   | Class B limits |  |  |  |
| Frequency (MHz)   | Coupling device | Detector type/<br>bandwidth | dB(μV)         |  |  |  |
| 0.15 to 0.5   | AAN             | Overi Beelt / Old II        | 84 to 74*      |  |  |  |
| 0.5 to 30   | AAN             | Quasi Peak / 9 kHz          | 74             |  |  |  |
| 0.15 to 0.5   | AAN             | Average / 9 kHz             | 74 to 64*      |  |  |  |
| 0.5 to 30   | AAN             | Average / 9 KHZ             | 64             |  |  |  |

<sup>\*</sup> Decreases with the logarithm of the frequency.

**Note:** 1. The lower limit shall apply at the transition frequencies.

- 2. Detector function in the form: QP = Quasi Peak, AVG = Average
- 3. The result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = ISN Factor + Cable Loss + Transient Limiter (If use)

Margin Level = Measurement Value – Limit Value

4. Applicable to wired network ports, optical fiber ports with metallic shield or tension members and antenna ports.





#### Class A equipment:

| Requirements for asymmetric mode conducted emissions from Class A equipment |                 |                             |                |  |  |  |
|---|-----------------|-----------------------------|----------------|--|--|--|
|   | Me              | asurement                   | Class A limits |  |  |  |
| Frequency (MHz)   | Coupling device | Detector type/<br>bandwidth | dB(μA)         |  |  |  |
| 0.15 to 0.5   | Current Probe   | Quasi Peak / 9 kHz          | 53 to 43*      |  |  |  |
| 0.5 to 30   | Current Frode   | Quasi i cak / 9 ki iz       | 43             |  |  |  |
| 0.15 to 0.5   | Current Probe   | Average / 9 kHz             | 40 to 30*      |  |  |  |
| 0.5 to 30   | Current Probe   | Average / 9 KHZ             | 30             |  |  |  |

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### Class B equipment:

| Requirements for asymmetric mode conducted emissions from Class B equipment |                 |                             |                |  |  |  |
|---|-----------------|-----------------------------|----------------|--|--|--|
|   | Me              | asurement                   | Class B limits |  |  |  |
| Frequency (MHz)   | Coupling device | Detector type/<br>bandwidth | dB(μA)         |  |  |  |
| 0.15 to 0.5   | Current Probe   | Quasi Peak / 9 kHz          | 40 to 30*      |  |  |  |
| 0.5 to 30   | Current Frobe   | Quasi Feak / 9 kmz          | 30             |  |  |  |
| 0.15 to 0.5   | Current Probe   | Average / 9 kHz             | 30 to 20*      |  |  |  |
| 0.5 to 30   | Current Frone   | Average / 9 kmz             | 20             |  |  |  |

<sup>\*</sup> Decreases with the logarithm of the frequency.

**Note:** 1. The lower limit shall apply at the transition frequencies.

- 2. Detector function in the form: QP = Quasi Peak, AVG = Average
- 3. The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Current Probe Factor + Cable Loss + Transient Limiter (If use)

Margin Level = Measurement Value – Limit Value

4. Applicable to wired network ports, optical fiber ports with metallic shield or tension members and antenna ports.





#### **4.2.2** Measurement Instrument


|      | Test Site: W01-CE                     |              |                        |            |                        |  |  |  |
|------|---------------------------------------|--------------|------------------------|------------|------------------------|--|--|--|
| Item | Equipment                             | Manufacturer | Model                  | Meter No.  | Calibration<br>Date    |  |  |  |
| 1    | TWO-LINE<br>V-NETWORK                 | R&S          | ENV216                 | CT-1-025-1 | Apr. 26, 2025          |  |  |  |
| 2    | EMI Test<br>Receiver                  | R&S          | ESCI                   | CT-1-024   | Apr. 18, 2025          |  |  |  |
| 3    | Impedance<br>Stabilization<br>Network | TESEQ        | T8-CAT6                | CT-1-105   | May 09, 2025           |  |  |  |
| 4    | Artificial Mains<br>Network (AMN)     | SCHWARZBECK  | NSLK 8127              | CT-1-104-1 | Apr. 26, 2025          |  |  |  |
| 5    | RF Cable                              | MVE          | 200200.400LL<br>.500A  | CT-9-101   | Apr. 23, 2025          |  |  |  |
| 6    | 50ohm<br>Termination                  | N/A          | N/A                    | CT-1-065-1 | Apr. 26, 2025          |  |  |  |
| 7    | Measurement<br>Software               | EZ-EMC       | Ver:<br>EMC-CON<br>3A1 | CT-3-012   | No calibration request |  |  |  |
| 8    | Current Probe                         | TESEQ        | CSP 9160A              | CT-1-106   | Apr. 17, 2025          |  |  |  |

**Note:** 1. The calibration interval of the above test instruments is 12 months.

2. The calibration interval of the current probe is 24 months.

|      | Test Site: W08-CE                 |              |                          |                  |                        |  |  |  |
|------|-----------------------------------|--------------|--------------------------|------------------|------------------------|--|--|--|
| Item | Equipment                         | Manufacturer | Model                    | Meter No.        | Calibration<br>Date    |  |  |  |
| 1    | TWO-LINE<br>V-NETWORK             | R&S          | ENV216                   | CT-1-025-2       | Jun. 20, 2024          |  |  |  |
| 2    | RF Cable                          | EMCI         | EMCCFD300-<br>BM-BM-5000 | CT-1-107-2       | Jun. 24, 2024          |  |  |  |
| 3    | EMI Test<br>Receiver              | R&S          | ESR3                     | CT-1-103         | Jun. 20, 2024          |  |  |  |
| 4    | Artificial Mains<br>Network (AMN) | SCHWARZBECK  | NSLK 8127<br>RC          | CT-1-104-1R<br>C | Jun. 20, 2024          |  |  |  |
| 5    | Four Balanced<br>Pair ISN         | FCC          | F-071115-105<br>7-1-09   | CT-1-027         | Jun. 24, 2024          |  |  |  |
| 6    | 50ohm<br>Termination              | N/A          | N/A                      | CT-1-109-2       | Jun. 20, 2024          |  |  |  |
| 7    | Measurement<br>Software           | EZ-EMC       | Ver:<br>EMC-CON<br>3A1   | CT-3-012         | No calibration request |  |  |  |

**Note:** 1. The calibration interval of the above test instruments is 12 months.







#### **4.2.3** Measurement Procedure

- a. The table-top equipment under test was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The floor-standing equipment under test was placed insulation support unit from the horizontal ground plane. The LISN at least be 0.8 meter from nearest chassis of equipment under test.
- b. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All associated equipment powered from additional LISN(s).
- c. Interrelating cables that hang closer than 0.4 meter to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
- d. The loads and/or devices simulating typical operating conditions shall be connected to at least one of each type of interface port of the equipment under test. If loading (or terminating) with a device of actual usage is not feasible, the port should be loaded with a simulator. Where these options are not practical the port shall be loaded by the application of a typical impedance considering both the common and differential modes.
- e. For unshielded / unshielded twisted pair measurement:

  The impedance stabilization network (ISN) at least 0.8 meter from nearest chassis of equipment under test. The communication function of equipment under test was executed in normal condition. ISN was connected between EUT and associated equipment and ISN was connected directly to reference ground plane.
  - For shielded / shielded twisted pair measurement: The current probe to EUT horizontal distance may be increased to 0.8 meter. Break the external protective insulation (exposing the shield) and connect a 150  $\Omega$  resistor with a physical connection between the cable screen and the RGP. The 150  $\Omega$  resistor shall be  $\leq$  0.3 meter from the outside surface of the screen to ground.
- g. The EMI test receiver scanned from 150kHz to 30MHz for emissions in each of modes. For wired network ports supporting Ethernet traffic, that can operate at multiple rates, measurements may be limited to mode in which the EUT operates at its maximum rate. Emission frequency and amplitude were recorded, recording at least six highest emissions.
- h. The equipment under test and cable configuration of the above highest emission amplitude were recorded.

#### 4.2.4 Deviation from Standard


No deviation






# 4.2.5 Measurement Configuration


#### < Table-Top equipment under test for unshielded / unshielded twisted pair >

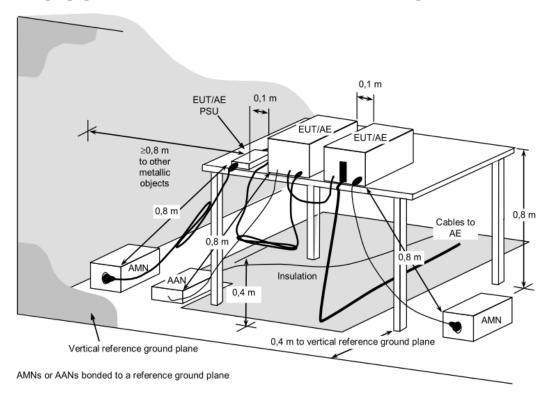

#### < Table-Top equipment under test for shielded / shielded twisted pair >

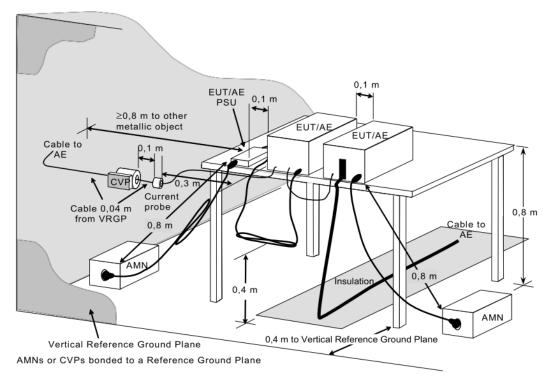

**Note:** Please refer to the 4.2.7 for the actual test configuration.









# 4.2.6 Measurement Result

| Test Voltage                    | 230Vac, 50Hz | Frequency Range       | 0.15 ~ 30 MHz     |
|---------------------------------|--------------|-----------------------|-------------------|
| <b>Environmental Conditions</b> | 21°C, 50% RH | 6dB Bandwidth         | 9 kHz             |
| Test Date                       | 2025/05/23   | <b>Test Condition</b> | LAN port (10Mbps) |
| Tested by                       | Guanwei Liao | Test Site             | W01-CE            |
| Test Mode                       | A            |                       |                   |

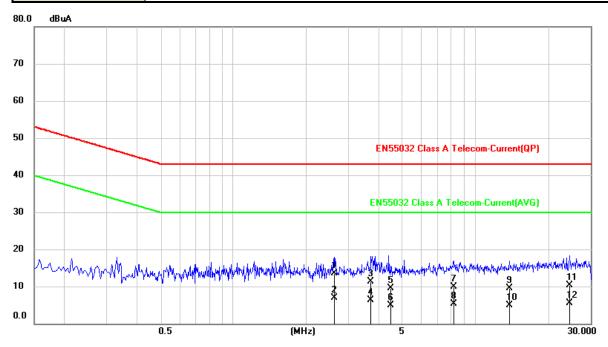

| No. | Frequency (MHz) | Reading Level (dBµA) | Correct Factor (dB) | Measurement (dBμA) | Limit<br>(dBµA) | Margin<br>(dB) | Detector |
|-----|-----------------|----------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 2.6188          | 3.24                 | 10.29               | 13.53              | 43.00           | -29.47         | QP       |
| 2   | 2.6188          | -3.40                | 10.29               | 6.89               | 30.00           | -23.11         | AVG      |
| 3   | 3.7275          | 1.09                 | 10.31               | 11.40              | 43.00           | -31.60         | QP       |
| 4   | 3.7275          | -4.00                | 10.31               | 6.31               | 30.00           | -23.69         | AVG      |
| 5   | 4.4463          | -0.86                | 10.32               | 9.46               | 43.00           | -33.54         | QP       |
| 6   | 4.4463          | -5.49                | 10.32               | 4.83               | 30.00           | -25.17         | AVG      |
| 7   | 8.2183          | -0.55                | 10.37               | 9.82               | 43.00           | -33.18         | QP       |
| 8   | 8.2183          | -5.16                | 10.37               | 5.21               | 30.00           | -24.79         | AVG      |
| 9   | 13.8717         | -0.86                | 10.43               | 9.57               | 43.00           | -33.43         | QP       |
| 10  | 13.8717         | -5.47                | 10.43               | 4.96               | 30.00           | -25.04         | AVG      |
| 11  | 24.5780         | -0.20                | 10.51               | 10.31              | 43.00           | -32.69         | QP       |
| 12  | 24.5780         | -4.94                | 10.51               | 5.57               | 30.00           | -24.43         | AVG      |


- 2. Correct Factor = ISN Factor (or Current Probe Factor) + Cable Loss + Transient Limiter (If use)
- 3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value








| Test Voltage                    | 230Vac, 50Hz | Frequency Range       | 0.15 ~ 30 MHz      |
|---------------------------------|--------------|-----------------------|--------------------|
| <b>Environmental Conditions</b> | 21°C, 50% RH | 6dB Bandwidth         | 9 kHz              |
| <b>Test Date</b>                | 2025/05/23   | <b>Test Condition</b> | LAN port (100Mbps) |
| Tested by                       | Guanwei Liao | Test Site             | W01-CE             |
| <b>Test Mode</b>                | A            |                       |                    |

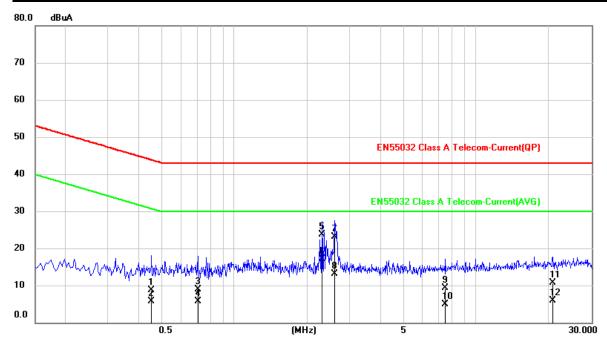

| No. | Frequency<br>(MHz) | Reading Level (dBµA) | Correct Factor (dB) | Measurement (dBμA) | Limit<br>(dBµA) | Margin<br>(dB) | Detector |
|-----|--------------------|----------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.4568             | -1.59                | 10.27               | 8.68               | 43.75           | -35.07         | QP       |
| 2   | 0.4568             | -4.51                | 10.27               | 5.76               | 30.75           | -24.99         | AVG      |
| 3   | 0.7022             | -1.33                | 10.26               | 8.93               | 43.00           | -34.07         | QP       |
| 4   | 0.7022             | -4.55                | 10.26               | 5.71               | 30.00           | -24.29         | AVG      |
| 5   | 2.3022             | 13.37                | 10.29               | 23.66              | 43.00           | -19.34         | QP       |
| 6   | 2.3022             | 6.77                 | 10.29               | 17.06              | 30.00           | -12.94         | AVG      |
| 7   | 2.6049             | 12.89                | 10.29               | 23.18              | 43.00           | -19.82         | QP       |
| 8   | 2.6049             | 2.74                 | 10.29               | 13.03              | 30.00           | -16.97         | AVG      |
| 9   | 7.4733             | -0.97                | 10.36               | 9.39               | 43.00           | -33.61         | QP       |
| 10  | 7.4733             | -5.51                | 10.36               | 4.85               | 30.00           | -25.15         | AVG      |
| 11  | 20.8078            | 0.30                 | 10.47               | 10.77              | 43.00           | -32.23         | QP       |
| 12  | 20.8078            | -4.48                | 10.47               | 5.99               | 30.00           | -24.01         | AVG      |


- 2. Correct Factor = ISN Factor (or Current Probe Factor) + Cable Loss + Transient Limiter (If use)
- 3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value








| Test Voltage             | 230Vac, 50Hz | Frequency Range       | $0.15 \sim 30 \text{ MHz}$ |
|--------------------------|--------------|-----------------------|----------------------------|
| Environmental Conditions | 21°C, 50% RH | 6dB Bandwidth         | 9 kHz                      |
| <b>Test Date</b>         | 2025/05/23   | <b>Test Condition</b> | LAN port (1Gbps)           |
| Tested by                | Guanwei Liao | Test Site             | W01-CE                     |
| <b>Test Mode</b>         | A            |                       |                            |

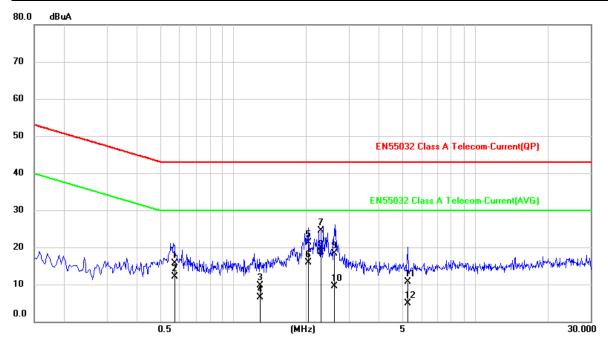

| No. | Frequency<br>(MHz) | Reading Level (dBµA) | Correct Factor (dB) | Measurement (dBμA) | Limit<br>(dBµA) | Margin<br>(dB) | Detector |
|-----|--------------------|----------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.5778             | 5.43                 | 10.26               | 15.69              | 43.00           | -27.31         | QP       |
| 2   | 0.5778             | 1.90                 | 10.26               | 12.16              | 30.00           | -17.84         | AVG      |
| 3   | 1.2893             | -0.52                | 10.28               | 9.76               | 43.00           | -33.24         | QP       |
| 4   | 1.2893             | -3.80                | 10.28               | 6.48               | 30.00           | -23.52         | AVG      |
| 5   | 2.0452             | 10.99                | 10.29               | 21.28              | 43.00           | -21.72         | QP       |
| 6   | 2.0452             | 5.52                 | 10.29               | 15.81              | 30.00           | -14.19         | AVG      |
| 7   | 2.3039             | 14.26                | 10.29               | 24.55              | 43.00           | -18.45         | QP       |
| 8   | 2.3039             | 8.37                 | 10.29               | 18.66              | 30.00           | -11.34         | AVG      |
| 9   | 2.6141             | 8.05                 | 10.29               | 18.34              | 43.00           | -24.66         | QP       |
| 10  | 2.6141             | -0.74                | 10.29               | 9.55               | 30.00           | -20.45         | AVG      |
| 11  | 5.2440             | 0.38                 | 10.33               | 10.71              | 43.00           | -32.29         | QP       |
| 12  | 5.2440             | -5.38                | 10.33               | 4.95               | 30.00           | -25.05         | AVG      |


- 2. Correct Factor = ISN Factor (or Current Probe Factor) + Cable Loss + Transient Limiter (If use)
- 3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value








| Test Voltage                    | 230Vac, 50Hz         | Frequency Range | 0.15 ~ 30 MHz      |
|---------------------------------|----------------------|-----------------|--------------------|
| <b>Environmental Conditions</b> | 21°C, 50% RH         | 6dB Bandwidth   | 9 kHz              |
| <b>Test Date</b>                | 2025/05/23 Test Cond |                 | LAN port (100Mbps) |
| Tested by                       | Guanwei Liao         | Test Site       | W01-CE             |
| <b>Test Mode</b>                | В                    |                 |                    |

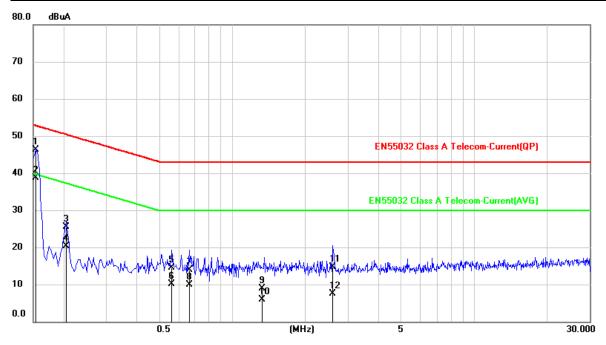

| No. | Frequency<br>(MHz) | Reading Level (dBµA) | Correct Factor (dB) | Measurement (dBμA) | Limit<br>(d <b>B</b> µA) | Margin<br>(dB) | Detector |
|-----|--------------------|----------------------|---------------------|--------------------|--------------------------|----------------|----------|
| 1   | 0.1539             | 35.86                | 10.53               | 46.39              | 52.79                    | -6.40          | QP       |
| 2   | 0.1539             | 28.23                | 10.53               | 38.76              | 39.79                    | -1.03          | AVG      |
| 3   | 0.2049             | 15.19                | 10.36               | 25.55              | 50.41                    | -24.86         | QP       |
| 4   | 0.2049             | 9.86                 | 10.36               | 20.22              | 37.41                    | -17.19         | AVG      |
| 5   | 0.5613             | 4.30                 | 10.26               | 14.56              | 43.00                    | -28.44         | QP       |
| 6   | 0.5613             | -0.15                | 10.26               | 10.11              | 30.00                    | -19.89         | AVG      |
| 7   | 0.6634             | 3.74                 | 10.26               | 14.00              | 43.00                    | -29.00         | QP       |
| 8   | 0.6634             | -0.36                | 10.26               | 9.90               | 30.00                    | -20.10         | AVG      |
| 9   | 1.3251             | -1.42                | 10.28               | 8.86               | 43.00                    | -34.14         | QP       |
| 10  | 1.3251             | -4.42                | 10.28               | 5.86               | 30.00                    | -24.14         | AVG      |
| 11  | 2.6089             | 4.44                 | 10.29               | 14.73              | 43.00                    | -28.27         | QP       |
| 12  | 2.6089             | -2.84                | 10.29               | 7.45               | 30.00                    | -22.55         | AVG      |


- 2. Correct Factor = ISN Factor (or Current Probe Factor) + Cable Loss + Transient Limiter (If use)
- 3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value








| Test Voltage             | 230Vac, 50Hz | Frequency Range       | 0.15 ~ 30 MHz    |
|--------------------------|--------------|-----------------------|------------------|
| Environmental Conditions | 21°C, 50% RH | 6dB Bandwidth         | 9 kHz            |
| Test Date                | 2025/05/23   | <b>Test Condition</b> | LAN port (1Gbps) |
| Tested by                | Guanwei Liao | Test Site             | W01-CE           |
| Test Mode                | В            |                       |                  |

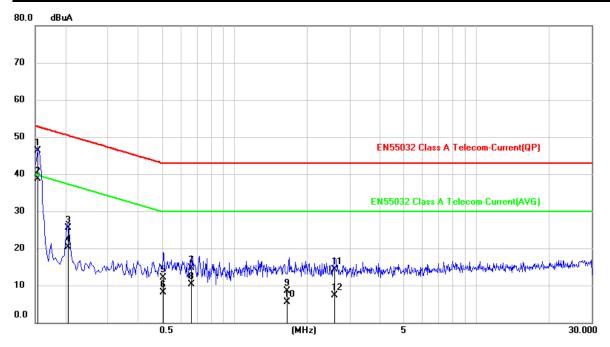

| No. | Frequency<br>(MHz) | Reading Level (dBµA) | Correct Factor (dB) | Measurement (dBμA) | Limit<br>(dBµA) | Margin<br>(dB) | Detector |
|-----|--------------------|----------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.1535             | 35.83                | 10.53               | 46.36              | 52.81           | -6.45          | QP       |
| 2   | 0.1535             | 28.22                | 10.53               | 38.75              | 39.81           | -1.06          | AVG      |
| 3   | 0.2044             | 15.20                | 10.36               | 25.56              | 50.43           | -24.87         | QP       |
| 4   | 0.2044             | 9.88                 | 10.36               | 20.24              | 37.43           | -17.19         | AVG      |
| 5   | 0.5092             | 1.93                 | 10.27               | 12.20              | 43.00           | -30.80         | QP       |
| 6   | 0.5092             | -2.21                | 10.27               | 8.06               | 30.00           | -21.94         | AVG      |
| 7   | 0.6672             | 4.38                 | 10.26               | 14.64              | 43.00           | -28.36         | QP       |
| 8   | 0.6672             | 0.10                 | 10.26               | 10.36              | 30.00           | -19.64         | AVG      |
| 9   | 1.6561             | -1.68                | 10.28               | 8.60               | 43.00           | -34.40         | QP       |
| 10  | 1.6561             | -4.73                | 10.28               | 5.55               | 30.00           | -24.45         | AVG      |
| 11  | 2.6104             | 4.07                 | 10.29               | 14.36              | 43.00           | -28.64         | QP       |
| 12  | 2.6104             | -2.92                | 10.29               | 7.37               | 30.00           | -22.63         | AVG      |


- 2. Correct Factor = ISN Factor (or Current Probe Factor) + Cable Loss + Transient Limiter (If use)
- 3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value








| Test Voltage                    | 230Vac, 50Hz | Frequency Range       | $0.15 \sim 30 \text{ MHz}$ |
|---------------------------------|--------------|-----------------------|----------------------------|
| <b>Environmental Conditions</b> | 21°C, 50% RH | 6dB Bandwidth         | 9 kHz                      |
| <b>Test Date</b>                | 2025/05/23   | <b>Test Condition</b> | LAN port (2.5Gbps)         |
| Tested by                       | Guanwei Liao | Test Site             | W01-CE                     |
| <b>Test Mode</b>                | В            |                       |                            |

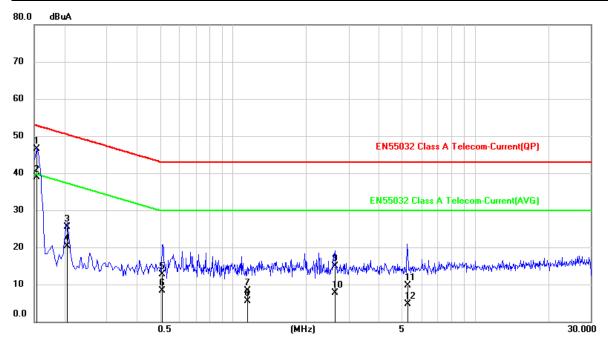

| No. | Frequency<br>(MHz) | Reading Level (dBµA) | Correct Factor (dB) | Measurement (dBμA) | Limit<br>(dBµA) | Margin<br>(dB) | Detector |
|-----|--------------------|----------------------|---------------------|--------------------|-----------------|----------------|----------|
| 1   | 0.1535             | 35.88                | 10.53               | 46.41              | 52.81           | -6.40          | QP       |
| 2   | 0.1535             | 28.29                | 10.53               | 38.82              | 39.81           | -0.99          | AVG      |
| 3   | 0.2046             | 15.22                | 10.36               | 25.58              | 50.42           | -24.84         | QP       |
| 4   | 0.2046             | 9.94                 | 10.36               | 20.30              | 37.42           | -17.12         | AVG      |
| 5   | 0.5100             | 2.39                 | 10.27               | 12.66              | 43.00           | -30.34         | QP       |
| 6   | 0.5100             | -1.90                | 10.27               | 8.37               | 30.00           | -21.63         | AVG      |
| 7   | 1.1438             | -1.95                | 10.27               | 8.32               | 43.00           | -34.68         | QP       |
| 8   | 1.1438             | -4.74                | 10.27               | 5.53               | 30.00           | -24.47         | AVG      |
| 9   | 2.6239             | 4.52                 | 10.29               | 14.81              | 43.00           | -28.19         | QP       |
| 10  | 2.6239             | -2.52                | 10.29               | 7.77               | 30.00           | -22.23         | AVG      |
| 11  | 5.2566             | -0.69                | 10.33               | 9.64               | 43.00           | -33.36         | QP       |
| 12  | 5.2566             | -5.53                | 10.33               | 4.80               | 30.00           | -25.20         | AVG      |

- 2. Correct Factor = ISN Factor (or Current Probe Factor) + Cable Loss + Transient Limiter (If use)
- 3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value Limit Value









# 4.2.7 Photographs of Measurement Configuration

Test mode A

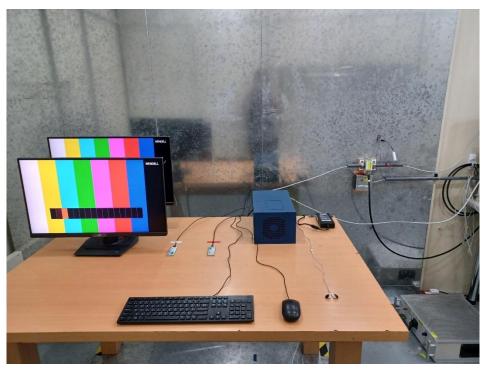









Test mode B









### 4.3 Radiated Emission Measurement

### 4.3.1 Limit of Radiated Emission Measurement

According to EN 55032 table1 - Required highest frequency for radiated measurement:

| Highest internal frequency (F <sub>x</sub> ) | Highest measured frequency              |
|--|---|
| $F_x \le 108 \text{ MHz}$                    | 1 GHz                                   |
| $108 \text{ MHz} < F_x \le 500 \text{ MHz}$  | 2 GHz                                   |
| $500 \text{ MHz} < F_x \le 1 \text{ GHz}$    | 5 GHz                                   |
| $F_x > 1 \text{ GHz}$                        | $5 \times F_x$ up to a maximum of 6 GHz |

#### Remark:

- 1. Fx: highest fundamental frequency generated or used within the EUT or highest frequency at which it operates.
- 2. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz.

### Class A equipment:

| Requirements for radiated emissions at frequencies up to 1 GHz for Class A equipment |                 |                             |                         |  |  |
|--|-----------------|-----------------------------|-------------------------|--|--|
|  | Me              | asurement                   | Class A limits dB(μV/m) |  |  |
| Frequency (MHz)  | Distance<br>(m) | Detector type/<br>bandwidth | OATS/SAC                |  |  |
| 30 to 230  | 10              | Quasi Peak /                | 40                      |  |  |
| 230 to 1000  | 10              |                             | 47                      |  |  |
| 30 to 230  | 3               | 120 kHz                     | 50                      |  |  |
| 230 to 1000  | 3               |                             | 57                      |  |  |

| Requirements for radiated emissions at frequencies above 1 GHz for Class A equipment |                 |                             |                         |  |  |
|--|-----------------|-----------------------------|-------------------------|--|--|
|  | Me              | asurement                   | Class A limits dB(μV/m) |  |  |
| Frequency (MHz)  | Distance<br>(m) | Detector type/<br>bandwidth | FSOATS                  |  |  |
| 1000 to 3000   |                 | Average /                   | 56                      |  |  |
| 3000 to 6000   | 3               | 1 MHz                       | 60                      |  |  |
| 1000 to 3000   | 3               | Peak /                      | 76                      |  |  |
| 3000 to 6000   |                 | 1 MHz                       | 80                      |  |  |





### Class B equipment:

| Requirements for radiated emissions at frequencies up to 1 GHz for Class B equipment |                 |                             |                         |  |  |
|--|-----------------|-----------------------------|-------------------------|--|--|
|  | Me              | asurement                   | Class B limits dB(μV/m) |  |  |
| Frequency (MHz)  | Distance<br>(m) | Detector type/<br>bandwidth | OATS/SAC                |  |  |
| 30 to 230  | 10              | Quasi Peak /                | 30                      |  |  |
| 230 to 1000  |                 |                             | 37                      |  |  |
| 30 to 230  | 3               | 120 kHz                     | 40                      |  |  |
| 230 to 1000  |                 |                             | 47                      |  |  |

| Requirements for radiated emissions at frequencies above 1 GHz for Class B equipment |                 |                             |                         |  |  |
|--|-----------------|-----------------------------|-------------------------|--|--|
|  | Me              | asurement                   | Class B limits dB(μV/m) |  |  |
| Frequency (MHz)  | Distance<br>(m) | Detector type/<br>bandwidth | FSOATS                  |  |  |
| 1000 to 3000   |                 | Average /                   | 50                      |  |  |
| 3000 to 6000   | 3               | 1 MHz                       | 54                      |  |  |
| 1000 to 3000   | 3               | Peak /                      | 70                      |  |  |
| 3000 to 6000   |                 | 1 MHz                       | 74                      |  |  |

**Note:** 1. The lower limit shall apply at the transition frequency.

2. Detector function in the form: PK = Peak, QP = Quasi Peak, AVG = Average

3. The result calculated as following:

Measurement Value = Reading Level + Correct Factor


Correct Factor = Antenna Factor + Cable Loss (Antenna to Pre-Amplifier) -

Pre-Amplifier Gain + Cable Loss (Pre-Amplifier to Receiver)

Margin Level = Measurement Value - Limit Value

At the same test procedures, due to the limits of EN 55032: 2015 + A11: 2020 are severe than EN 55032: 2015 + A1: 2020, When the requirements of EN 55032: 2015 + A11: 2020 are satisfied, the requirement of EN 55032: 2015 + A1: 2020 could be considered satisfied.

At the same test procedures, due to the limits of CISPR 32: 2015 + COR1: 2016 are severe than CISPR 32: 2015 + A1: 2019, When the requirements of CISPR 32: 2015 + COR1: 2016 are satisfied, the requirement of CISPR 32: 2015 + A1: 2019 could be considered satisfied.








## **4.3.2** Measurement Instrument

|      | Test Site: W08-966-1                          |                      |                            |              |                        |  |  |  |  |  |
|------|---|----------------------|----------------------------|--------------|------------------------|--|--|--|--|--|
| Item | Equipment                                     | Manufacturer         | Model                      | Meter No.    | Calibration<br>Date    |  |  |  |  |  |
| 1    | Horn Antenna                                  | Schwarzbeck          | BBHA 9120D                 | CT-9-031     | Jul. 29, 2024          |  |  |  |  |  |
| 2    | Horn Antenna                                  | Schwarzbeck          | BBHA 9170                  | CT-9-032     | Aug. 15, 2024          |  |  |  |  |  |
| 3    | TRILOG Broadband Antenna with 6 dB Attenuator | Schwarzbeck<br>& MVE | VULB 9168 &<br>MVE2251-06  | CT-1-096-1   | Apr. 29, 2025          |  |  |  |  |  |
| 4    | Spectrum<br>Analyzer                          | Agilent              | E4407B                     | CT-1-003(1)  | May 06, 2025           |  |  |  |  |  |
| 5    | EXA Signal<br>Analyzer                        | Keysight             | N9010A                     | CT-1-093     | Aug. 18, 2024          |  |  |  |  |  |
| 6    | EMI Test<br>Receiver Keysight N9038A CT-9-007 |                      | CT-9-007                   | May 06, 2025 |                        |  |  |  |  |  |
| 7    | Preamplifier                                  | EM                   | EMC330                     | CT-9-024     | May 06, 2025           |  |  |  |  |  |
| 8    | Preamplifier                                  | SGH & MCL            | SGH118 &<br>BW-S15W2+      | CT-9-071     | May 06, 2025           |  |  |  |  |  |
| 9    | Preamplifier                                  | EMCI                 | EMC184045SE                | CT-9-013     | Aug. 16, 2024          |  |  |  |  |  |
| 10   | Test Cable                                    | EMCI                 | EMCCFD400-NM-<br>NM-1000   | CT-1-132     | May 07, 2025           |  |  |  |  |  |
| 11   | Test Cable                                    | PEWC                 | CFD400NL-LW-N<br>M-NM-3000 | CT-1-141     | May 07, 2025           |  |  |  |  |  |
| 12   | Test Cable                                    | EMCI                 | EMCCFD400-NM-<br>NM-15000  | CT-1-133     | May 07, 2025           |  |  |  |  |  |
| 13   | Test Cable                                    | EMCI                 | EMC104-SM-35M-<br>600      | CT-1-134     | May 07, 2025           |  |  |  |  |  |
| 14   | Test Cable                                    | MVE                  | 280280.LL266.140<br>0      | CT-9-106     | May 07, 2025           |  |  |  |  |  |
| 15   | Test Cable                                    | EMCI                 | EMC102-KM-KM-<br>600       | CT-1-136     | Aug. 21, 2024          |  |  |  |  |  |
| 16   | Test Cable                                    | MVE                  | 140140.LL404.700           | CT-9-100     | May 07, 2025           |  |  |  |  |  |
| 17   | Measurement<br>Software                       | EZ-EMC               | Ver :WD-03A1-1             | CT-3-012     | No calibration request |  |  |  |  |  |

**Note:** 1. The calibration interval of the above test instruments is 12 months.





 $\epsilon$ 

### 4.3.3 Measurement Procedure

- a. The table-top equipment under test was placed on the top of a turntable 0.8 meter above the ground at 3 m 966 chamber. The floor-standing equipment under test was placed insulation support unit from the horizontal ground plane. The turntable was rotated 360 degrees to determine the position of the highest radiation emissions.
- b. The height of the antenna shall vary between 1 m to 4 m. Both vertical and horizontal polarizations of the antenna were set to make the measurement.
- c. The loads and/or devices simulating typical operating conditions shall be connected to at least one of each type of interface port of the equipment under test. If loading (or terminating) with a device of actual usage is not feasible, the port should be loaded with a simulator. Where these options are not practical the port shall be loaded by the application of a typical impedance considering both the common and differential modes.
- d. The initial step in collecting radiated emission data is a spectrum mode scanning the measurement frequency range.

Below 1GHz:

Reading in which marked as QP means measurements by using receiver mode with detector setting in RBW = 120 kHz.

If the spectrum mode measured peak value compliance with and lower than QP Limit, the equipment under test shall be deemed to meet QP Limits.

Above 1GHz:

Reading in which marked as Peak & AVG means measurements by using spectrum mode with setting in RBW = 1 MHz.

If the spectrum mode measured value compliance with the Peak Limits and lower than AVG Limits, the equipment under test shall be deemed to meet both Peak and AVG Limits.

e. Emission frequency and amplitude were recorded, recording at least six highest emissions. The equipment under test and cable configuration of the above highest emission amplitude were recorded.

### 4.3.4 Deviation from Standard


No deviation






## 4.3.5 Measurement Configuration

< Radiated Emissions Frequency: 30 MHz to 1000 MHz >

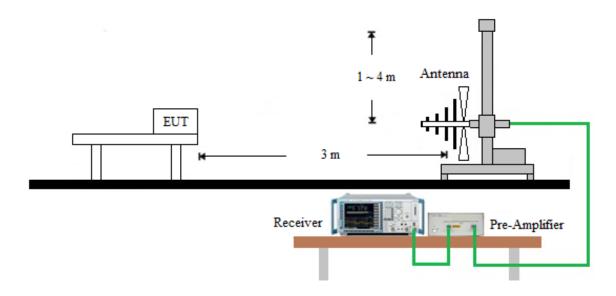

< Radiated Emissions Frequency: above 1GHz >

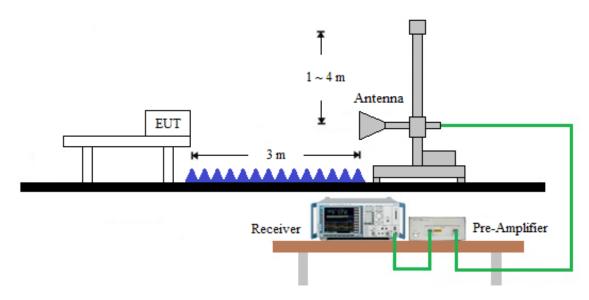

#### **Note:**

- (1) Please refer to the 4.3.7 for the actual test configuration.
- (2) Detector function in the form: PK = Peak, QP = Quasi Peak, AVG = Average
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor


Correct Factor = Antenna Factor + Cable Loss - Pre-Amplifier Gain (if use)

Margin Level = Measurement Value - Limit Value






### < EUT placement top view and measurement distance >

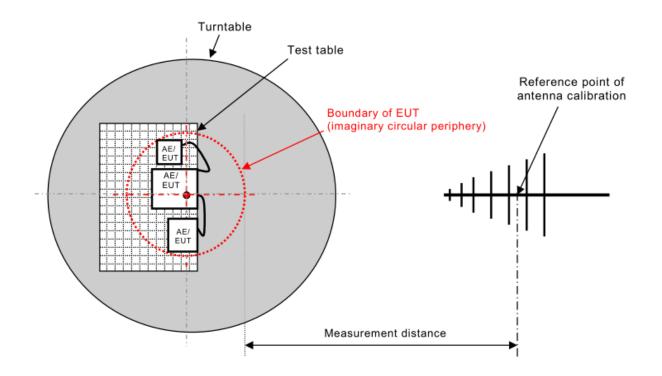


### < Boundary of EUT, Local AE and associated cabling >

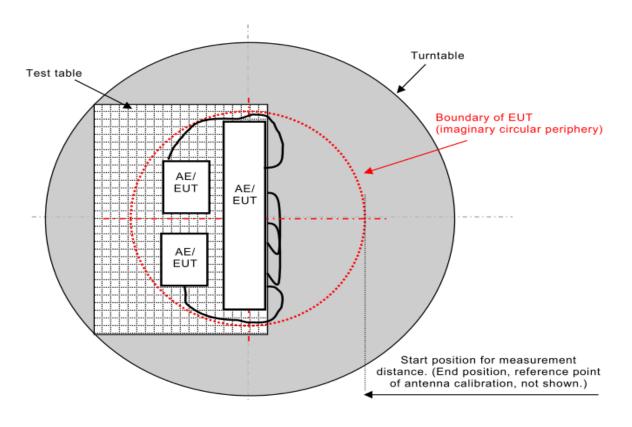







## < Table-Top equipment under test >

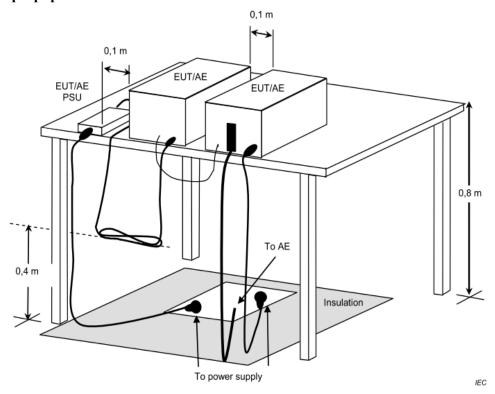

## < Floor-Standing equipment under test >

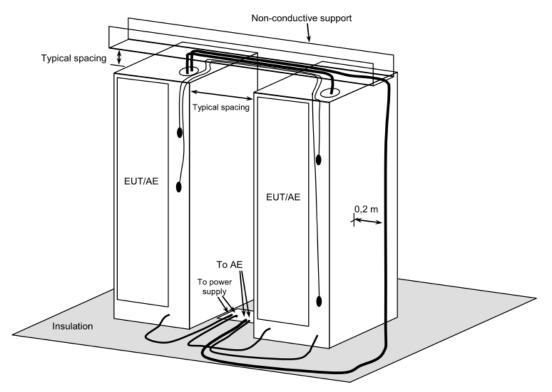

**Note:** Please refer to the 4.3.7 for the actual test configuration.








## 4.3.6 Measurement Result


| Test Voltage                    | 230Vac, 50Hz | Frequency Range      | $30 \sim 1000 \text{ MHz}$ |
|---------------------------------|--------------|----------------------|----------------------------|
| <b>Environmental Conditions</b> | 26°C, 44% RH | 6dB Bandwidth        | 120 kHz                    |
| Test Date                       | 2025/05/21   | <b>Test Distance</b> | 3m                         |
| Tested by                       | Karwin Kao   | Polarization         | Vertical                   |
| Test Site                       | W08-966-1    |                      |                            |

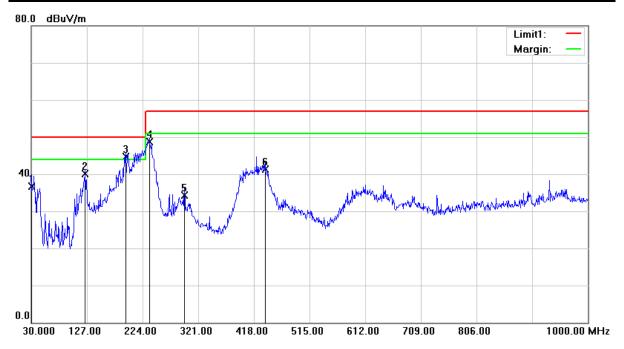

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBµV) | Correct<br>Factor<br>(dB/m) | Measurement (dBμV/m) | Limit<br>(dBµV/m) | Margin (dB) | Table<br>Degree<br>(degree) | Antenna<br>Height<br>(cm) | Detector |
|-----|--------------------|----------------------------|-----------------------------|----------------------|-------------------|-------------|-----------------------------|---------------------------|----------|
| 1   | 30.0000            | 47.72                      | -10.92                      | 36.80                | 50.00             | -13.20      | 252                         | 100                       | QP       |
| 2   | 124.0900           | 52.00                      | -11.92                      | 40.08                | 50.00             | -9.92       | 191                         | 100                       | QP       |
| 3   | 194.9000           | 57.15                      | -12.37                      | 44.78                | 50.00             | -5.22       | 351                         | 200                       | QP       |
| 4   | 235.6400           | 60.06                      | -11.35                      | 48.71                | 57.00             | -8.29       | 18                          | 100                       | QP       |
| 5   | 296.7500           | 42.91                      | -8.56                       | 34.35                | 57.00             | -22.65      | 134                         | 100                       | QP       |
| 6   | 437.4000           | 45.54                      | -4.18                       | 41.36                | 57.00             | -15.64      | 360                         | 200                       | QP       |

**Remark:** 1. QP = Quasi Peak


- 2. Correct Factor = Antenna Factor + Cable Loss (Antenna to Pre-Amplifier) Pre-Amplifier Gain + Cable Loss (Pre-Amplifier to Receiver)
  3. Measurement Value = Reading Level + Correct Factor
  4. Margin Level = Measurement Value – Limit Value








| Test Voltage                    | 230Vac, 50Hz | Frequency Range      | $30 \sim 1000 \text{ MHz}$ |
|---------------------------------|--------------|----------------------|----------------------------|
| <b>Environmental Conditions</b> | 26°C, 44% RH | 6dB Bandwidth        | 120 kHz                    |
| <b>Test Date</b>                | 2025/05/21   | <b>Test Distance</b> | 3m                         |
| Tested by                       | Karwin Kao   | Polarization         | Horizontal                 |
| Test Site                       | W08-966-1    |                      |                            |

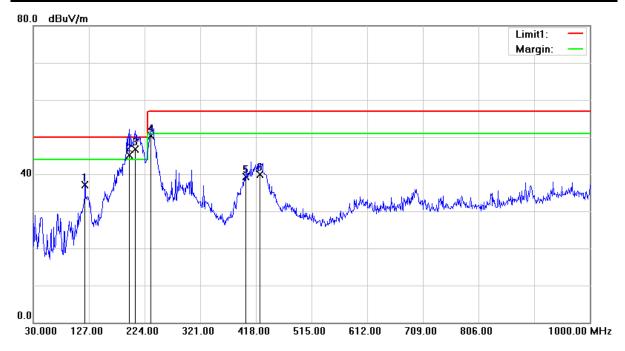

| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBµV) | Correct<br>Factor<br>(dB/m) | Measurement (dBμV/m) | Limit<br>(dBµV/m) | Margin (dB) | Table<br>Degree<br>(degree) | Antenna<br>Height<br>(cm) | Detector |
|-----|--------------------|----------------------------|-----------------------------|----------------------|-------------------|-------------|-----------------------------|---------------------------|----------|
| 1   | 120.2100           | 49.20                      | -12.17                      | 37.03                | 50.00             | -12.97      | 226                         | 200                       | QP       |
| 2   | 196.8400           | 57.56                      | -12.53                      | 45.03                | 50.00             | -4.97       | 87                          | 200                       | QP       |
| 3   | 207.5100           | 59.25                      | -12.58                      | 46.67                | 50.00             | -3.33       | 87                          | 200                       | QP       |
| 4   | 234.6700           | 61.79                      | -11.46                      | 50.33                | 57.00             | -6.67       | 53                          | 100                       | QP       |
| 5   | 400.5400           | 45.00                      | -5.68                       | 39.32                | 57.00             | -17.68      | 39                          | 100                       | QP       |
| 6   | 424.7900           | 44.80                      | -4.82                       | 39.98                | 57.00             | -17.02      | 43                          | 100                       | QP       |

- Remark: 1. QP = Quasi Peak
  2. Correct Factor = Antenna Factor + Cable Loss (Antenna to Pre-Amplifier) Pre-Amplifier Gain + Cable Loss (Pre-Amplifier to Receiver)
  - 3. Measurement Value = Reading Level + Correct Factor
    4. Margin Level = Measurement Value Limit Value







| Test Voltage                    | 230Vac, 50Hz | Frequency Range      | 1 ~ 6 GHz |
|---------------------------------|--------------|----------------------|-----------|
| <b>Environmental Conditions</b> | 26°C, 44% RH | 6dB Bandwidth        | 1MHz      |
| <b>Test Date</b>                | 2025/05/20   | <b>Test Distance</b> | 3m        |
| Tested by                       | Karwin Kao   | Polarization         | Vertical  |
| Test Site                       | W08-966-1    |                      |           |

|    |   |   |          |        |     |       | Limit<br>Limit |    |
|----|---|---|----------|--------|-----|-------|----------------|----|
|    |   |   |          |        |     |       |                |    |
|    |   |   |          |        |     |       |                |    |
| 50 |   |   |          |        |     |       |                |    |
|    | *************************************** | 5 | <b>X</b> |        |     |       | 9 11<br>1 1    |    |
| 8  |   |   |          | mounty | m~~ | which |                | mm |
| .0 |   |   |          |        |     |       |                |    |


| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBµV) | Correct<br>Factor<br>(dB/m) | Measurement (dBμV/m) | Limit<br>(dBµV/m) | Margin (dB) | Table<br>Degree<br>(degree) | Antenna<br>Height<br>(cm) | Detector |
|-----|--------------------|----------------------------|-----------------------------|----------------------|-------------------|-------------|-----------------------------|---------------------------|----------|
| 1   | 1325.000           | 66.72                      | -18.29                      | 48.43                | 76.00             | -27.57      | 301                         | 100                       | peak     |
| 2   | 1325.000           | 55.17                      | -18.29                      | 36.88                | 56.00             | -19.12      | 301                         | 100                       | AVG      |
| 3   | 1500.000           | 70.02                      | -18.47                      | 51.55                | 76.00             | -24.45      | 146                         | 100                       | peak     |
| 4   | 1500.000           | 60.83                      | -18.47                      | 42.36                | 56.00             | -13.64      | 146                         | 100                       | AVG      |
| 5   | 2400.000           | 63.97                      | -14.77                      | 49.20                | 76.00             | -26.80      | 206                         | 100                       | peak     |
| 6   | 2400.000           | 53.88                      | -14.77                      | 39.11                | 56.00             | -16.89      | 206                         | 100                       | AVG      |
| 7   | 2700.000           | 62.94                      | -14.34                      | 48.60                | 76.00             | -27.40      | 206                         | 100                       | peak     |
| 8   | 2700.000           | 51.74                      | -14.34                      | 37.40                | 56.00             | -18.60      | 206                         | 100                       | AVG      |
| 9   | 4987.500           | 54.61                      | -8.37                       | 46.24                | 80.00             | -33.76      | 165                         | 100                       | peak     |
| 10  | 4987.500           | 44.86                      | -8.37                       | 36.49                | 60.00             | -23.51      | 165                         | 100                       | AVG      |
| 11  | 5387.500           | 53.47                      | -7.95                       | 45.52                | 80.00             | -34.48      | 165                         | 100                       | peak     |
| 12  | 5387.500           | 43.90                      | -7.95                       | 35.95                | 60.00             | -24.05      | 165                         | 100                       | AVG      |

**Remark:** 1. peak = Peak, AVG = Average

- 2. Correct Factor = Antenna Factor + Cable Loss (Antenna to Pre-Amplifier) Pre-Amplifier Gain + Cable Loss (Pre-Amplifier to Receiver)

  3. Measurement Value = Reading Level + Correct Factor

  4. Margin Level = Measurement Value – Limit Value







| Test Voltage                    | 230Vac, 50Hz | Frequency Range      | 1 ~ 6 GHz  |
|---------------------------------|--------------|----------------------|------------|
| <b>Environmental Conditions</b> | 26°C, 44% RH | 6dB Bandwidth        | 1MHz       |
| <b>Test Date</b>                | 2025/05/21   | <b>Test Distance</b> | 3m         |
| Tested by                       | Karwin Kao   | Polarization         | Horizontal |
| Test Site                       | W08-966-1    |                      |            |

|   |     |            |   |                |             |      |      |      | Limit<br>Limit |         |
|---|-----|------------|---|----------------|-------------|------|------|------|----------------|---------|
|   |     |            |   |                |             |      |      |      |                |         |
| ŀ |     |            |   |                |             |      |      |      |                |         |
|   |     |            |   |                |             |      |      |      |                |         |
|   |     | 5          |   |                |             |      |      |      | A.             |         |
|   | * * | <b>6</b> 5 | k | 1 <sup>2</sup> | Mana Marian | why. | mmhm | ~~~~ | ramalin        | ~~~~~~~ |
|   |     |            |   |                |             |      |      |      |                |         |


| No. | Frequency<br>(MHz) | Reading<br>Level<br>(dBµV) | Correct<br>Factor<br>(dB/m) | Measurement (dBμV/m) | Limit<br>(dBµV/m) | Margin (dB) | Table<br>Degree<br>(degree) | Antenna<br>Height<br>(cm) | Detector |
|-----|--------------------|----------------------------|-----------------------------|----------------------|-------------------|-------------|-----------------------------|---------------------------|----------|
| 1   | 1337.500           | 65.11                      | -18.32                      | 46.79                | 76.00             | -29.21      | 241                         | 100                       | peak     |
| 2   | 1337.500           | 52.81                      | -18.32                      | 34.49                | 56.00             | -21.51      | 241                         | 100                       | AVG      |
| 3   | 1462.500           | 65.39                      | -18.16                      | 47.23                | 76.00             | -28.77      | 257                         | 100                       | peak     |
| 4   | 1462.500           | 52.09                      | -18.16                      | 33.93                | 56.00             | -22.07      | 257                         | 100                       | AVG      |
| 5   | 1862.500           | 63.17                      | -17.59                      | 45.58                | 76.00             | -30.42      | 200                         | 100                       | peak     |
| 6   | 1862.500           | 51.63                      | -17.59                      | 34.04                | 56.00             | -21.96      | 200                         | 100                       | AVG      |
| 7   | 2100.000           | 63.68                      | -15.96                      | 47.72                | 76.00             | -28.28      | 146                         | 100                       | peak     |
| 8   | 2100.000           | 50.47                      | -15.96                      | 34.51                | 56.00             | -21.49      | 146                         | 100                       | AVG      |
| 9   | 2400.000           | 64.65                      | -14.77                      | 49.88                | 76.00             | -26.12      | 159                         | 100                       | peak     |
| 10  | 2400.000           | 54.19                      | -14.77                      | 39.42                | 56.00             | -16.58      | 159                         | 100                       | AVG      |
| 11  | 2687.500           | 60.33                      | -14.38                      | 45.95                | 76.00             | -30.05      | 194                         | 100                       | peak     |
| 12  | 2687.500           | 47.28                      | -14.38                      | 32.90                | 56.00             | -23.10      | 194                         | 100                       | AVG      |

**Remark:** 1. peak = Peak, AVG = Average

- 2. Correct Factor = Antenna Factor + Cable Loss (Antenna to Pre-Amplifier) Pre-Amplifier Gain + Cable Loss (Pre-Amplifier to Receiver)

  3. Measurement Value = Reading Level + Correct Factor


  4. Margin Level = Measurement Value – Limit Value







# 4.3.7 Photographs of Measurement Configuration

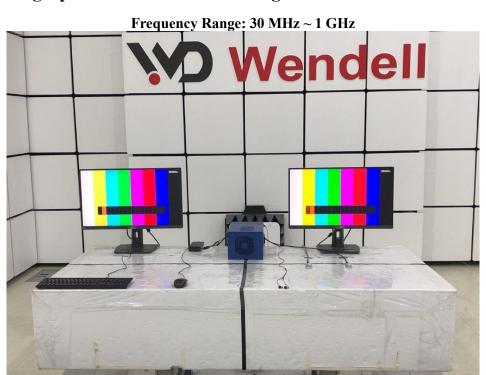















### 4.4 Harmonic Current Measurement

### 4.4.1 Limit of Harmonic Current Measurement

| Limit for         | Limit for Class A equipment |  |  |  |  |  |
|-------------------|-----------------------------|--|--|--|--|--|
| Harmonic          | Max. permissible            |  |  |  |  |  |
| Order             | harmonics current           |  |  |  |  |  |
| n                 | A                           |  |  |  |  |  |
|                   |                             |  |  |  |  |  |
| Od                | d harmonic                  |  |  |  |  |  |
| 3                 | 2.30                        |  |  |  |  |  |
| 5                 | 1.14                        |  |  |  |  |  |
| 7                 | 0.77                        |  |  |  |  |  |
| 9                 | 0.40                        |  |  |  |  |  |
| 11                | 0.33                        |  |  |  |  |  |
| 13                | 0.21                        |  |  |  |  |  |
| $15 \le n \le 39$ | 0.15*(15/n)                 |  |  |  |  |  |
| Eve               | en harmonic                 |  |  |  |  |  |
| 2                 | 1.08                        |  |  |  |  |  |
| 4                 | 0.43                        |  |  |  |  |  |
| 6                 | 0.30                        |  |  |  |  |  |
| $8 \le n \le 40$  | 0.23*(8/n)                  |  |  |  |  |  |

|                   | Limit for Class D equipment        |                                    |  |  |  |  |  |  |  |
|-------------------|------------------------------------|------------------------------------|--|--|--|--|--|--|--|
| Harmonic<br>Order | Max. permissible harmonics current | Max. permissible harmonics current |  |  |  |  |  |  |  |
| n                 | <b>per watt</b><br>mA/W            | A                                  |  |  |  |  |  |  |  |
|                   | Odd Harmonic only                  | ý                                  |  |  |  |  |  |  |  |
| 3                 | 3.4                                | 2.30                               |  |  |  |  |  |  |  |
| 5                 | 1.9                                | 1.14                               |  |  |  |  |  |  |  |
| 7                 | 1.0                                | 0.77                               |  |  |  |  |  |  |  |
| 9                 | 0.5                                | 0.40                               |  |  |  |  |  |  |  |
| 11                | 0.35                               | 0.33                               |  |  |  |  |  |  |  |
| 13                | 0.30                               | 0.21                               |  |  |  |  |  |  |  |
| $15 \le n \le 39$ | 3.85/n                             | 0.15*(15/n)                        |  |  |  |  |  |  |  |


**Note:** 1. Class A and Class D are classified according to item section 5 of EN IEC 61000-3-2.

2. According to section 7 of EN IEC 61000-3-2, the above limits for all equipment except for Class B or C equipment and no limits apply for equipment with a rated power of 75W or less.

### **4.4.2** Measurement Instrument

| Item | Equipment                    | Manufacturer | Model       | Meter No.   | Calibration<br>Date |
|------|------------------------------|--------------|-------------|-------------|---------------------|
| 1    | Harmonic & Flicker Analyizer | EMC PARTNER  | HAR-1000-1P | CT-1-090(1) | Oct. 17, 2024       |
| 2    | Power Source                 | APC          | AFV-P-5000B | CT-1-210    | Oct. 17, 2024       |

**Note:** 1. The calibration interval of the above test instruments is 12 months.







### 4.4.3 Measurement Procedure

The table-top equipment under test was placed on the top of a wooden table 0.8 meter above the ground and operated to produce the maximum harmonic under normal operating conditions for each successive harmonic component in turn. The floor-standing equipment under test was placed insulation support unit from the horizontal ground plane.

The classification of equipment is according to section 5 of EN IEC 61000-3-2.

The equipment is classified as follows:

#### Class A:

Equipment not specified as belonging to Class B, C or D shall be considered as Class A equipment. Some example of Class A equipment are:

- Balanced three-phase equipment;
- Household appliances, excluding those specified as belonging to Class B, C or D;
- Vacuum cleaners;
- High pressure cleaners;
- Tools, excluding portable tools;
- Independent phase control dimmers;
- Audio equipment;
- Professional luminaires for stage lighting and studios.

#### Class B:

- Portable tools;
- Arc welding equipment which is not professional equipment.

#### Class C:

- Lighting equipment;
- Integrated lamps, integrated luminaires, non-integrated luminaires, separate lighting control gear;
- Lighting part of multi-function equipment where one the primary function of this is illumination;
- Ultraviolet (UV) and infrared (IR) radiation equipment;
- Illuminated advertising signs;
- Independent dimmers, other than phase control type, for lighting equipment;
- DLT control device.

#### Class D:

Equipment having a specified power less than or equal to 600W, of the following types:

- Personal computers and personal computer monitors;
- Television receivers;
- Refrigerators and freezers having one or more variable-speed drives to control compressor motor(s).






## 4.4.4 Deviation from Standard


No deviation

## 4.4.5 Measurement Configuration

< Table-Top equipment under test >

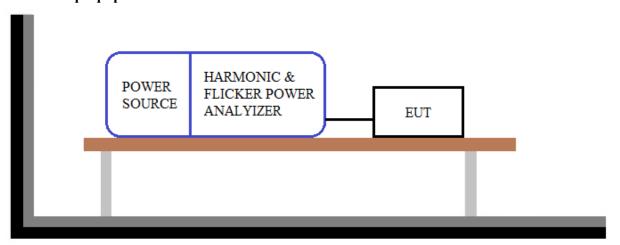

### < Floor-Standing equipment under test >

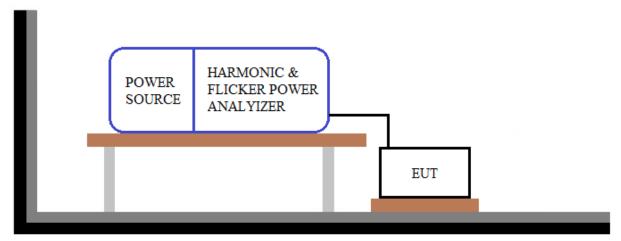





### 4.4.6 Measurement Result

| Supply Voltage /<br>Ampere | 230.5 Vrms /<br>0.538 Arms | Test Date            | 2025/05/20   |
|----------------------------|----------------------------|----------------------|--------------|
| Test Duration              | 5 min                      | Power<br>Consumption | 111.3W       |
| Power Frequency            | 50.000Hz                   | Power Factor         | 0.898        |
| Environmental Conditions   | 22°C, 51% RH               | Tested by            | Guanwei Liao |

| Ondon | Freq. | Iavg   | Irms   | Irms%  | Irms%L | Imax   | Limit  | Vrms   | Vrms%  |
|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| Order | [Hz]  | [A]    | [A]    | [%]    | [%]    | [A]    | [A]    | [V]    | [%]    |
| 1     | 50    | 0.4993 | 0.4939 | 91.788 | -      | 0.5728 | -      | 230.45 | 99.979 |
| 2     | 100   | 0.0184 | 0.0161 | 2.9946 | 1.4920 | 0.0271 | 1.0800 | 0.1473 | 0.0639 |
| 3     | 150   | 0.1788 | 0.1768 | 32.849 | 7.6851 | 0.2053 | 2.3000 | 0.0736 | 0.0319 |
| 4     | 200   | 0.0073 | 0.0068 | 1.2704 | 1.5898 | 0.0099 | 0.4300 | 0.0982 | 0.0426 |
| 5     | 250   | 0.0520 | 0.0522 | 9.7096 | 4.5830 | 0.0571 | 1.1400 | 0.0736 | 0.0319 |
| 6     | 300   | 0.0000 | 0.0031 | 0.5672 | 1.0173 | 0.0045 | 0.3000 | 0.0736 | 0.0319 |
| 7     | 350   | 0.0237 | 0.0237 | 4.4011 | 3.0755 | 0.0269 | 0.7700 | 0.0982 | 0.0426 |
| 8     | 400   | 0.0000 | 0.0024 | 0.4537 | 1.0615 | 0.0043 | 0.2300 | 0.0491 | 0.0213 |
| 9     | 450   | 0.0073 | 0.0066 | 1.2250 | 1.6479 | 0.0121 | 0.4000 | 0.0736 | 0.0319 |
| 10    | 500   | 0.0000 | 0.0023 | 0.4310 | 1.2605 | 0.0039 | 0.1840 | 0.0736 | 0.0319 |
| 11    | 550   | 0.0110 | 0.0112 | 2.0871 | 3.4032 | 0.0120 | 0.3300 | 0.0491 | 0.0213 |
| 12    | 600   | 0.0000 | 0.0022 | 0.4083 | 1.4330 | 0.0029 | 0.1533 | 0.0736 | 0.0319 |
| 13    | 650   | 0.0093 | 0.0092 | 1.7015 | 4.3597 | 0.0106 | 0.2100 | 0.0736 | 0.0319 |
| 14    | 700   | 0.0000 | 0.0022 | 0.4083 | 1.6718 | 0.0024 | 0.1314 | 0.0491 | 0.0213 |
| 15    | 750   | 0.0065 | 0.0065 | 1.2024 | 4.3132 | 0.0070 | 0.1500 | 0.0736 | 0.0319 |
| 16    | 800   | 0.0000 | 0.0022 | 0.4083 | 1.9107 | 0.0026 | 0.1150 | 0.0736 | 0.0319 |
| 17    | 850   | 0.0061 | 0.0062 | 1.1570 | 4.7038 | 0.0067 | 0.1324 | 0.0736 | 0.0319 |
| 18    | 900   | 0.0000 | 0.0022 | 0.4083 | 2.1495 | 0.0026 | 0.1022 | 0.0491 | 0.0213 |
| 19    | 950   | 0.0063 | 0.0062 | 1.1570 | 5.2572 | 0.0073 | 0.1184 | 0.0491 | 0.0213 |
| 20    | 1000  | 0.0000 | 0.0021 | 0.3857 | 2.2556 | 0.0024 | 0.0920 | 0.0736 | 0.0319 |
| 21    | 1050  | 0.0006 | 0.0049 | 0.9074 | 4.5573 | 0.0055 | 0.1071 | 0.0736 | 0.0319 |
| 22    | 1100  | 0.0000 | 0.0021 | 0.3857 | 2.4812 | 0.0023 | 0.0836 | 0.0736 | 0.0319 |
| 23    | 1150  | 0.0008 | 0.0046 | 0.8621 | 4.7418 | 0.0054 | 0.0978 | 0.0736 | 0.0319 |
| 24    | 1200  | 0.0000 | 0.0022 | 0.4083 | 2.8660 | 0.0026 | 0.0767 | 0.0736 | 0.0319 |
| 25    | 1250  | 0.0021 | 0.0051 | 0.9528 | 5.6966 | 0.0055 | 0.0900 | 0.0736 | 0.0319 |
| 26    | 1300  | 0.0000 | 0.0024 | 0.4537 | 3.4498 | 0.0027 | 0.0708 | 0.0736 | 0.0319 |
| 27    | 1350  | 0.0003 | 0.0050 | 0.9301 | 6.0059 | 0.0052 | 0.0833 | 0.0736 | 0.0319 |
| 28    | 1400  | 0.0000 | 0.0023 | 0.4310 | 3.5294 | 0.0027 | 0.0657 | 0.0736 | 0.0319 |
| 29    | 1450  | 0.0004 | 0.0043 | 0.7940 | 5.5067 | 0.0054 | 0.0776 | 0.0736 | 0.0319 |
| 30    | 1500  | 0.0000 | 0.0023 | 0.4310 | 3.7815 | 0.0027 | 0.0613 | 0.0736 | 0.0319 |
| 31    | 1550  | 0.0000 | 0.0048 | 0.8848 | 6.5592 | 0.0050 | 0.0726 | 0.0736 | 0.0319 |
| 32    | 1600  | 0.0000 | 0.0026 | 0.4764 | 4.4582 | 0.0029 | 0.0575 | 0.0982 | 0.0426 |
| 33    | 1650  | 0.0000 | 0.0039 | 0.7260 | 5.7292 | 0.0048 | 0.0682 | 0.0982 | 0.0426 |
| 34    | 1700  | 0.0000 | 0.0029 | 0.5445 | 5.4136 | 0.0032 | 0.0541 | 0.0736 | 0.0319 |
| 35    | 1750  | 0.0005 | 0.0049 | 0.9074 | 7.5955 | 0.0054 | 0.0643 | 0.0982 | 0.0426 |
| 36    | 1800  | 0.0000 | 0.0029 | 0.5445 | 5.7320 | 0.0034 | 0.0511 | 0.0982 | 0.0426 |
| 37    | 1850  | 0.0008 | 0.0043 | 0.7940 | 7.0258 | 0.0056 | 0.0608 | 0.0982 | 0.0426 |
| 38    | 1900  | 0.0000 | 0.0028 | 0.5218 | 5.7983 | 0.0037 | 0.0484 | 0.0982 | 0.0426 |
| 39    | 1950  | 0.0002 | 0.0043 | 0.7940 | 7.4056 | 0.0055 | 0.0577 | 0.0982 | 0.0426 |
| 40    | 2000  | 0.0000 | 0.0027 | 0.4991 | 5.8381 | 0.0037 | 0.0460 | 0.0982 | 0.0426 |

#### Note:

- 1. Limits are not specified for equipment with a rated power of 75W or less.
- 2. According to EN IEC 61000-3-2 the manufacturer shall specify the power of the apparatus. This value shall be used for establishing limits. The specified power shall be within +/-10% of the measured power.





# 4.4.7 Photographs of Measurement Configuration







## 4.5 Voltage Fluctuations and Flicker Measurement

## 4.5.1 Limit for Voltage Functions and Flicker Measurement

| Tests Item                                | Limits IEC/EN 61000-3-3       | Remark   |
|---|-------------------------------|--|
| $P_{ m st}$                               | 1.0, T <sub>p</sub> = 10 min. | $P_{ m st}$ means short-term flicker indicator.          |
| $P_{\mathrm{lt}}$                         | 0.65, T <sub>p</sub> =2 hr.   | $P_{ m lt}$ means long-term flicker indicator.           |
| d <sub>c</sub> (%)                        | 3.3%                          | $d_{\rm c}$ means relative steady-state voltage change.  |
| d <sub>max</sub> (%)                      | 4%                            | $d_{\max}$ means maximum relative voltage change.        |
| $T_{\mathrm{dt}}\left(\mathrm{ms}\right)$ | 500 ms                        | $T_{\rm dt}$ means maximum time that d(t) exceeds 3.3 %. |

### 4.5.2 Measurement Instrument

| Item | Equipment                    | Manufacturer | Model       | Meter No.   | Calibration<br>Date |
|------|------------------------------|--------------|-------------|-------------|---------------------|
| 1    | Harmonic & Flicker Analyizer | EMC PARTNER  | HAR-1000-1P | CT-1-090(1) | Oct. 17, 2024       |
| 2    | Power Source                 | APC          | AFV-P-5000B | CT-1-210    | Oct. 17, 2024       |

**Note:** 1. The calibration interval of the above test instruments is 12 months.

### 4.5.3 Measurement Procedure

The table-top equipment under test was placed on the top of a wooden table 0.8 meter above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating condition. The floor-standing equipment under test was placed insulation support unit from the horizontal ground plane.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 min and the observation period for long-term flicker indicator is 2 hours.

### 4.5.4 Deviation from Standard


No deviation






# 4.5.5 Measurement Configuration

< Table-Top equipment under test >

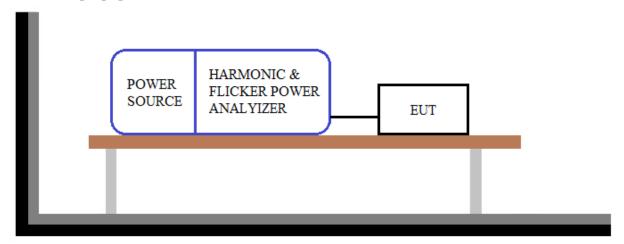

### < Floor-Standing equipment under test >

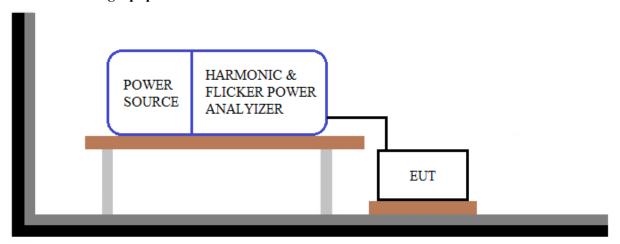








## 4.5.6 Measurement Result

| Supply Voltage /<br>Ampere | 230.3 Vrms /<br>0.482 Arms | Test Date                | 2025/05/20   |
|----------------------------|----------------------------|--------------------------|--------------|
| Observation (Tp)           | 30 min                     | Environmental Conditions | 22°C, 51% RH |
| Power Frequency            | 50.013Hz                   | Tested by                | Guanwei Liao |

| Test Parameter                            | Measurement Value | Test Limit | Remarks |
|---|-------------------|------------|---------|
| $P_{ m st}$                               | 0.08              | 1.00       | Pass    |
| $P_{ m lt}$                               | 0.09              | 0.65       | Pass    |
| $T_{\mathrm{dt}}\left(\mathrm{ms}\right)$ | 0.00              | 500        | Pass    |
| d <sub>max</sub> (%)                      | 0.00              | 4%         | Pass    |
| d <sub>c</sub> (%)                        | 0.12              | 3.3%       | Pass    |

Note: 1.  $P_{st}$  means short-term flicker indicator.

- P<sub>lt</sub> means long-term flicker indicator.
   T<sub>dt</sub> means maximum time that dt exce  $T_{\rm dt}$  means maximum time that dt exceeds 3.3 %.
- 4.  $d_{\text{max}}$  means maximum relative voltage change.
- 5.  $d_c$  means relative steady-state voltage change.








# 4.5.7 Photographs of Measurement Configuration









# 5 Immunity Test

# **5.1 Standard Description**

| Product standard         | EN 55035                 |  |  |
|--------------------------|--------------------------|--|--|
|                          | IEC 61000-4-2            | Contact discharge: ±4 kV, Air discharge: ±8 kV   |  |
|                          | (ESD)                    | Performance Criterion B  |  |
|                          | IEC 61000-4-3<br>(RS)    | Field Strength: 3 V/m, Test Signal: 80% AM with 1 kHz sine wave Frequency Range: 80 M ~ 1000 MHz, 1800 MHz, 2600 MHz, 3500 MHz, 5000 MHz for spot test Performance Criterion A |  |
|                          |                          | AC Main Power Port: ±1 kV  |  |
|                          | IEC 61000-4-4            | DC Network Power Port (cable length > 3m): ±0.5 kV   |  |
|                          | (EFT)                    | Analogue/Digital Data Port (cable length > 3m): ±0.5 kV  |  |
|                          |                          | Repetition Frequency: 5 kHz  |  |
|                          |                          | Performance Criterion B  |  |
|                          |                          | AC Main Power Port - Line to Line: ±1 kV, Line to Ground: ±2 kV  |  |
|                          |                          | DC Network Power Port (cable length $> 3$ m) - Line to Ground: $\pm 0.5$ kV  |  |
|                          |                          | Performance Criteria B   |  |
|                          | IEC 61000-4-5<br>(Surge) | Analogue/Digital Data Port (unshielded symmetrical): Line to Ground  |  |
| Basic Standard           |                          | Apply where primary protection is intended: ±1 kV and ±4 kV  |  |
| and                      |                          | Apply where primary protection is not intended: ±1 kV  |  |
| Performance<br>Critorian |                          | Performance Criteria C   |  |
| Criterion<br>required    |                          | Analogue/Digital Data Ports (coaxial or shielded) - Shielded to Ground: ±0.5 kV  |  |
|                          |                          | Performance Criteria B   |  |
|                          |                          | Voltage Level: 3 V, 3 ~ 1 V, 1 V   |  |
|                          |                          | Test Signal: 80% AM with 1 kHz sine wave   |  |
|                          | IEC 61000-4-6            | Frequency Range: 0.15 M ~ 10 MHz, 10 M ~ 30 MHz, 30 M ~ 80 MHz   |  |
|                          | (CS)                     | Applicable to port:  |  |
|                          |                          | AC Main Power Port, DC Network Power Port (cable length > 3m) & Analogue/Digital Data Port (cable length > 3m)   |  |
|                          |                          | Performance Criterion A  |  |
|                          | IEC 61000-4-8            | 1 A/m, 50/60 Hz  |  |
|                          | (PFMF)                   | Performance Criterion A  |  |
|                          | IEC 61000-4-11<br>(Dips) | Voltage Dips:  >95% reduction, 0.5 cycle, Performance Criterion B 30% reduction, 25 cycle, Performance Criterion C Voltage Interruptions:                                      |  |
|                          |                          | >95% reduction, 250 cycle, Performance Criterion C   |  |





# **5.2 Performance Criteria**

According to Clause 8 of EN 55035 standard, the general performance criteria as following:

| Criteria A | The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.  |
|------------|---|
| Criteria B | During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.  After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended. |
| Criteria C | Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.  Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.   |





# **5.3 Electrostatic Discharge Immunity Test**

# **5.3.1 Test Specification**


| Standard                        | IEC/EN 61000-4-2                            |
|---------------------------------|---|
| Discharge Impedance             | 330 ohm / 150 pF                            |
| Dischause Valtase               | Air Discharge: ±2 kV, ±4 kV, ±8 kV (Direct) |
| Discharge Voltage               | Contact Discharge: ±4 kV (Direct/Indirect)  |
| Number of Dischause             | Air: Minimum 10 times at each polarity      |
| Number of Discharge             | Contact: Minimum 10 times at each polarity  |
| Discharge Mode Single Discharge |   |
| Discharge Period                | 1 second minimum                            |

## **5.3.2 Test Instrument**

| Item | Equipment                        | Manufacturer | Model     | Meter No. | Calibration<br>Date |
|------|----------------------------------|--------------|-----------|-----------|---------------------|
| 1    | ESD Generator                    | TESEQ        | NSG 437   | CT-1-140  | Jun. 15, 2024       |
| 2    | ESD Generator                    | NoiseKen     | ESS-B3011 | CT-1-089  | Jul. 23, 2024       |
| 3    | Digital<br>Thermo-Hygro<br>Meter | N/A          | HTC-8     | CT-2-047  | Jun. 06, 2023       |
| 4    | Atmosphere pressure meter        | TES          | TES-1161  | CT-5-094  | Aug. 10, 2023       |

**Note:** 1. The calibration interval of the test instruments is 12 months.

<sup>2.</sup> The calibration interval of thermo hygrometer/ Atmosphere pressure meter is 24 months.







#### **5.3.3** Test Procedure

The test procedure was in accordance with IEC 61000-4-2.

The test generator necessary to perform direct and indirect application of discharge to the equipment under test in following methods:

a. Contact discharges to the conductive surface and coupling planes:

For table-top equipment under test one of the test points shall be the centre front edge of the horizontal coupling plane, which shall be subjected to at least 20 indirect discharges (10 of each polarity). All other test points shall each receive at least 20 direct contact discharges (10 of each polarity). All surfaces normally touched by the user should be tested. Test shall be performed at a maximum repetition rate of one discharge per second.

#### Vertical Coupling Plane (VCP):

The coupling plane, of dimensions  $0.5 \text{ m} \times 0.5 \text{ m}$ , is placed parallel to, and positioned at a distance 0.1 m from the equipment under test, with the discharge electrode touching the coupling plane. The four faces of the equipment under test will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane, of dimensions  $1.6 \text{ m} \times 0.8 \text{ m}$ , is placed under the equipment under test. The generator shall be positioned vertically a distance of 0.1 m from the equipment under test, with the discharge electrode touching the coupling plane. The four faces of the equipment under test will be performed with electrostatic discharge.

#### b. Air discharge at apertures and slots and insulating surface:

On those surfaces of the equipment under test where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum 20 single air discharges (10 of each polarity) shall be applied to the selected test point for each such area.






## 5.3.4 Deviation from Standard

No deviation

## 5.3.5 Test Configuration


### < Table-Top equipment under test >

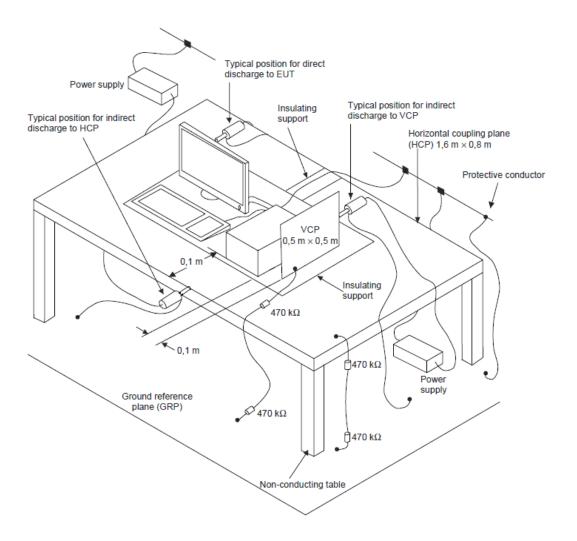






### < Floor-Standing equipment under test >

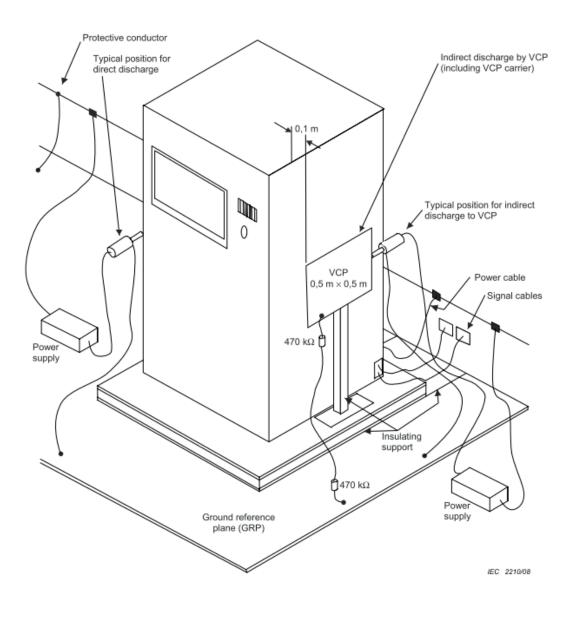







## 5.3.6 Test Result

| Test Voltage             | 230Vac, 50Hz | Test Date | 2025/05/26 |
|--------------------------|--------------|-----------|------------|
| Environmental Conditions | 22°C, 42% RH | Pressure  | 1009 mbar  |
| Tested by                | Guanwei Liao | Test Site | W01        |

**Test Results of Direct Application** 

|            | Air Discharge        |        |        |        |  |  |
|------------|----------------------|--------|--------|--------|--|--|
| TD 4 D * 4 | Discharge Level (kV) |        |        | Dogult |  |  |
| Test Point | ±2                   | ±4     | ±8     | Result |  |  |
| Front      | NA                   | NA     | NA     | NA     |  |  |
| Back       | A (#1)               | A (#1) | A (#1) | A      |  |  |
| Left       | NA                   | NA     | NA     | NA     |  |  |
| Right      | NA                   | NA     | NA     | NA     |  |  |
| Тор        | NA                   | NA     | NA     | NA     |  |  |
| Bottom     | NA                   | NA     | NA     | NA     |  |  |
| Other      | NA                   | NA     | NA     | NA     |  |  |

<sup>\*</sup> Test location(s) in which discharge to be applied illustrated by photos shown in next page(s).

| Contact Discharge |                      |        |  |  |
|-------------------|----------------------|--------|--|--|
| Test Point        | Discharge Level (kV) | Result |  |  |
| rest I omt        | ±4                   | Result |  |  |
| Front             | A                    | A      |  |  |
| Back              | B (#1)               | В      |  |  |
| Left              | A                    | A      |  |  |
| Right             | A                    | A      |  |  |
| Тор               | A                    | A      |  |  |
| Bottom            | A                    | A      |  |  |
| Other             | NA                   | NA     |  |  |

<sup>\*</sup> Test location(s) in which discharge to be applied illustrated by photos shown in next page(s).







**Test Results of Indirect Application** 

| HCP Discharge |                      |        |  |  |
|---------------|----------------------|--------|--|--|
| Test Point    | Discharge Level (kV) | Result |  |  |
| Test Foint    | ±4                   | Kesuit |  |  |
| Front         | A                    | A      |  |  |
| Back          | A                    | A      |  |  |
| Left          | A                    | A      |  |  |
| Right         | A                    | A      |  |  |

| VCP Discharge |                      |        |  |
|---------------|----------------------|--------|--|
| Test Point    | Discharge Level (kV) | Result |  |
| Test Point    | ±4                   | Kesuit |  |
| Front         | A                    | A      |  |
| Back          | A                    | A      |  |
| Left          | A                    | A      |  |
| Right         | A                    | A      |  |

#### **Note:**

N/A: Not applicable

Criteria A: The EUT function was correct during the test.


Criteria A: (#1) No occur arcing.

Criteria B: (#1) The EUT was interrupted during the test, but could self-recover to the normal mode after the test.





### **Description of Test Points**

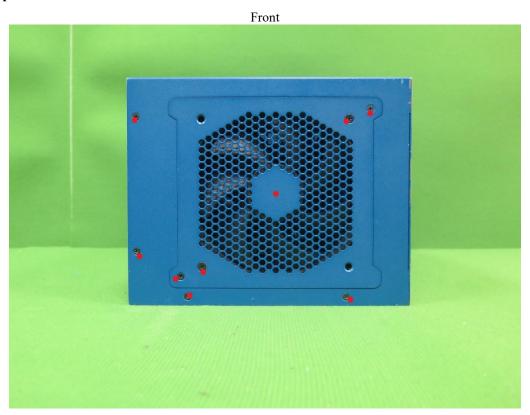





\*Red Dot - Contact Discharged Blue Dot - Air Discharged





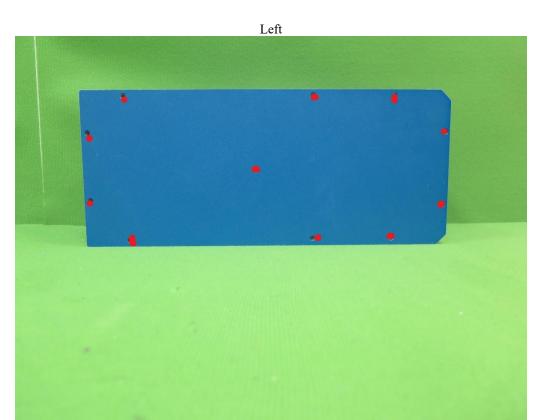


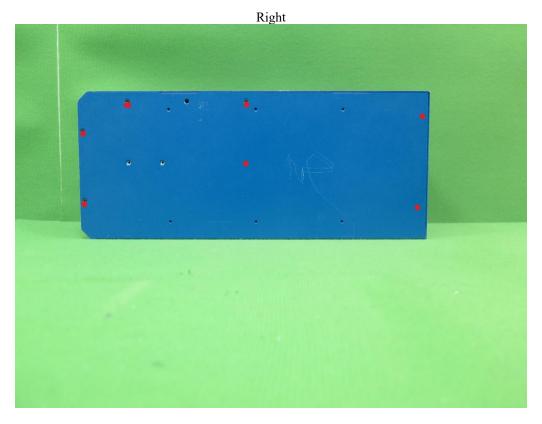


\*Red Dot - Contact Discharged Blue Dot - Air Discharged






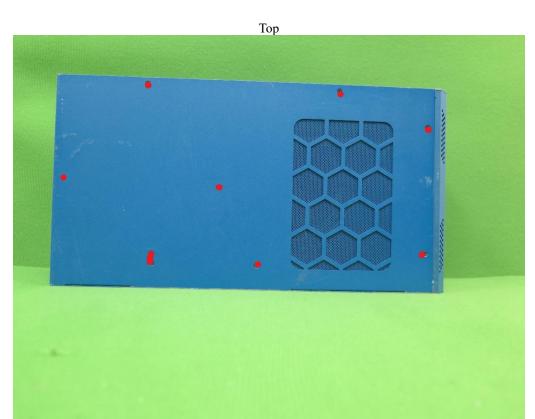

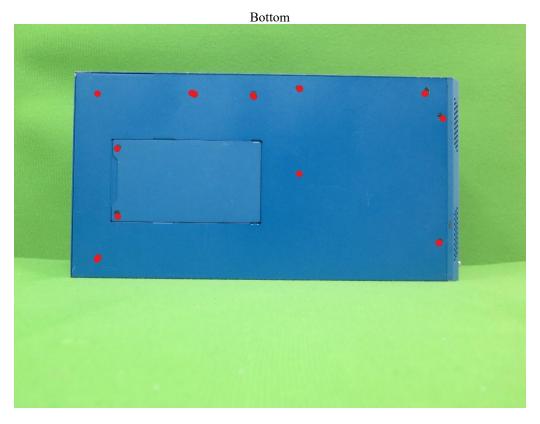

\*Red Dot - Contact Discharged Blue Dot - Air Discharged








# **5.3.7 Photographs of Test Configuration**










# **5.4 Radiated, Radio-frequency Electromagnetic Field Immunity Test**

# **5.4.1 Test Specification**

| Standard            | IEC/EN 61000-4-3   |
|---------------------|--|
| Frequency Range     | 80 MHz ~ 1000 MHz,<br>1800 MHz, 2600 MHz, 3500 MHz, 5000 MHz for spot test |
| Field Strength      | 3 V/m  |
| Modulation          | 80% AM Modulation with 1 kHz Sine Wave                                     |
| Frequency Step      | 1%   |
| Polarity of Antenna | Horizontal and Vertical  |
| Test Distance       | 2.15 m (80 MHz ~ 1000 MHz)<br>1 m (1 GHz ~ 6 GHz)                          |
| Antenna Height      | 1.55 m (80 MHz ~ 1000 MHz)<br>1.05 m (1 GHz ~ 6 GHz)                       |
| Dwell Time          | 3 seconds or not exceed 5 seconds  |








## **5.4.2 Test Instrument**

| Item | Equipment                                  | Manufacturer                  | Model                    | Meter No. | Calibration<br>Date    |
|------|--|-------------------------------|--------------------------|-----------|------------------------|
| 1    | RadiCentre  ® Modular  EMC Test  Systems   | DARE                          | CTR1004B                 | CT-1-080  | No calibration request |
| 2    | RF Signal<br>Generator                     | DARE                          | RGN6000B                 | CT-1-080  | Aug. 06, 2024          |
| 3    | LINEAR<br>POWER RF<br>AMPLIFIER            | TESEQ                         | CBA1G-300<br>D           | CT-1-163  | Aug. 06, 2024          |
| 4    | LINEAR<br>POWER RF<br>AMPLIFIER            | OPHIR                         | 5193                     | CT-1-083  | Aug. 06, 2024          |
| 5    | LINEAR<br>POWER RF<br>AMPLIFIER            | FRANKONIA                     | FLG-30C                  | CT-1-061  | Aug. 06, 2024          |
| 6    | Periodic<br>Test-Antenna                   | Schwarzbeck Mess - Elektronik | STLP 9128 E              | CT-1-085  | No calibration request |
| 7    | Stacked<br>Microwave<br>LogPer.<br>Antenna | Schwarzbeck Mess - Elektronik | STLP 9149                | CT-1-086  | No calibration request |
| 8    | E-Field Probe                              | Narda                         | EP-601                   | CT-1-212  | Sep. 26, 2024          |
| 9    | Measurement<br>Software                    | EMC-RS                        | Ver: 2.0.1.3             | N/A       | No calibration request |
| 10   | Conditioning Amplifier / Microphone        | B & K                         | 2690-OS2 /<br>4192-L-001 | CT-1-157  | May 29, 2024           |
| 11   | Sound Level<br>Calibrator                  | B & K                         | 4231                     | CT-1-156  | May 29, 2024           |
| 12   | Sound Analyer                              | VGT                           | ABT CB0                  | CT-1-159  | May 28, 2024           |
| 13   | Frequency<br>Counter                       | HEWLETT<br>PACKARD            | 53181A                   | CT-1-158  | May 25, 2024           |
| 14   | Audio output<br>Measurement<br>Software    | VGT                           | V1.2-WD                  | N/A       | No calibration request |

**Note:** 1. The calibration interval of the above test instruments is 12 months.








#### **5.4.3** Test Procedure

The test procedure was in accordance with IEC 61000-4-3.

- a. The table-top equipment under test and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with the Uniform Field Are (UFA) such that the distance from antenna to the EUT was 2.15 meter at test frequency 80M ~ 1GHz & 1 meter at test frequency  $1G \sim 6GHz$ . Both horizontal and vertical polarization of the antenna and four sides of the equipment under test are set on measurement. All cables shall be connected to the equipment under test and arranged on the test site in accordance with the installation instructions and shall replicate typical installations and use as much as possible.
- b. The specified wiring types and connectors shall be used. If the wiring to and from the equipment under test is not specified, unshielded parallel conductors shall be used. If the product specification require a wiring length of less than or equal to 1 m, then the specified length shall be used. If the length specified is greater than 1 m, or is not specified, then the length of cable used shall be chosen in accordance with typical installation practices. Unless otherwise specified above, a minimum of 1 m of cable shall be exposed to the electromagnetic field in one orientation, either vertical or horizontal.
- c. Each cable does not need to be exposed to the field during the exposure of each face of the equipment under test. But each cable shall, at least during one of the equipment under test orientations, be positioned within the Uniform Field Are (UFA), and thus exposed to the field.
- d. If a product committee determines excess cable length needs to be decoupled (for cables leaving the test area), then the decoupling method used shall not impair the operation of the equipment under test. If cable decoupling is performed, CMADs may be used. The CMAD shall always be placed flat on the floor. Each cable to be decoupled should be treated with a separate CMAD.
- e. If the equipment under test is too large such that it cannot be fully illuminated by the radiating antenna, or exceeds the size of the Uniform Field Area (UFA) then partial illumination shall be used. The equipment under test can be repositioned so that the front surface remains within the Uniform Field Area (UFA) in order to illuminate those sections of the equipment under test that were previously outside the Uniform Field Area (UFA).
- f. The frequency range shall be swept, with the signal 80% amplitude modulated with a 1kHz sine wave. If multiple test signals were used during testing, care should be taken to ensure that any recorded performance degradation was caused by a single test signal and was not caused by the combination of multiple test signals.








### 5.4.4 Deviation from Standard

No deviation

## **5.4.5** Test Configuration

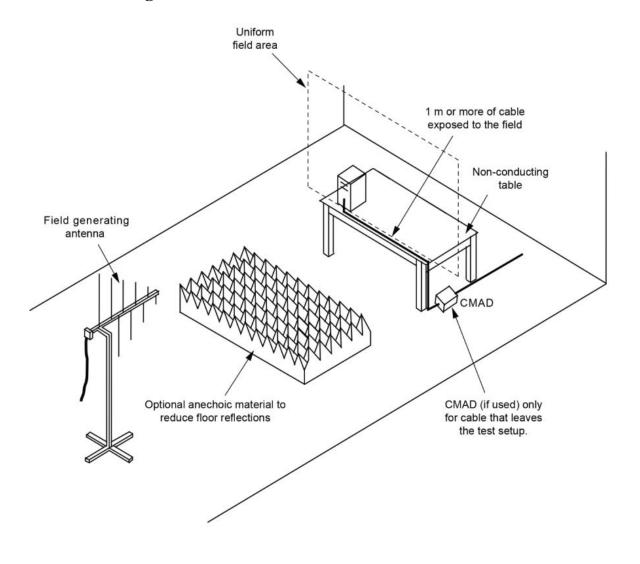





### 5.4.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 22°C, 50% RH |
|--------------|--------------|--------------------------|--------------|
| Tested by    | Eric Hsieh   | Test Date                | 2025/05/13   |

| Frequency Range<br>(MHz) | Azimuth         | Polarity | Field<br>Strength<br>(V/m) | Modulation       | Result |
|--------------------------|-----------------|----------|----------------------------|------------------|--------|
| 80 ~ 1000                | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 1800                     | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 2600                     | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 3500                     | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 5000                     | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |

**Note:** 

Criteria A: The EUT function was correct during the test.

Not supporting telephony audio output function acoustic/electrical measurements

| Frequency Range (MHz) | Azimuth         | Polarity | Field<br>Strength<br>(V/m) | Modulation       | Result |
|-----------------------|-----------------|----------|----------------------------|------------------|--------|
| 80 ~ 1000             | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 1800                  | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 2600                  | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 3500                  | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |
| 5000                  | 0, 90, 180, 270 | H/V      | 3                          | 80% AM<br>(1kHz) | A      |


**Note:** 

Criteria A: The audio output performance evaluation criteria were satisfied. The interference ratio is -20 dB or





## **5.4.7 Photographs of Test Configuration**

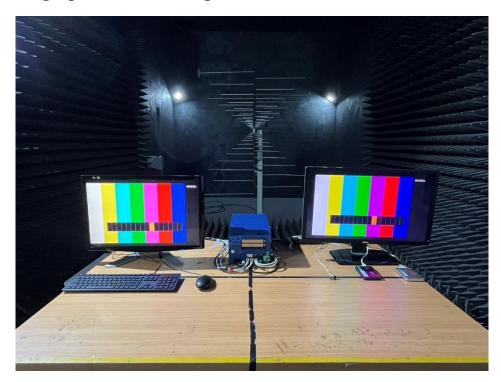







## **5.5 Electrical Fast Transient / Burst Immunity Test**

## **5.5.1 Test Specification**


| Standard   | IEC/EN 61000-4-4                        |  |
|--|---|--|
| Test Voltage  AC Main Power Port: ±1 kV  DC Network Power Port (Note 1) (cable length > 3m): ±0.5 kV  Analogue/Digital Data Ports (Note 1) (cable length > 3m): ±0.5 |   |  |
| Polarity   | Positive & Negative                     |  |
| Impulse Frequency  | CPE xDSL Ports: 100 kHz<br>Other: 5 kHz |  |
| Impulse Wave   | mpulse Wave 5/50 ns                     |  |
| Burst Duration   | 15 ms                                   |  |
| Burst Period 300 ms  |   |  |
| Test Duration  | Not less than 1 min.                    |  |

**Note:** 1. Applicable only to port which, according to the manufacturer's specification, support cabled lengths greater than 3m.

### **5.5.2** Test Instrument

| Item | Equipment     | Manufacturer | Model   | Meter No. | Calibration<br>Date |
|------|---------------|--------------|---------|-----------|---------------------|
| 1    | EFT Generator | 3ctest       | EFT500S | CT-1-165  | Sep. 27, 2024       |
| 2    | Clamp         | 3ctest       | CCC100  | CT-1-166  | Sep. 27, 2024       |

**Note:** 1. The calibration interval of the above test instruments is 12 months.







#### **5.5.3** Test Procedure

The test procedure was in accordance with IEC 61000-4-4.

- a. The table-top equipment under test was placed on a table that is 0.8 meter height. A ground reference plane is placed on the table, and uses 0.1 m insulation between the equipment under test and ground reference plane. The floor-standing equipment under test was placed on 0.1 m insulation support unit between the equipment under test and ground reference plane.
- b. The minimum area of the ground reference plane is 1 m x 1 m, and 0.65 mm thick min, and projected beyond the equipment under test by at least 0.1 m on all sides. The equipment under test shall be arranged and connected to satisfy its functional requirements, according to the equipment installation specifications.

For input power ports:

The equipment under test is connected to the power ports through a coupling device that directly couples the EFT/B interference signal. Each of the line conductors is impressed with burst noise for 1 minute. The distance between the coupling device and the table-top equipment under test is 0.5 m. For signal / data ports:

The capacitive coupling clamp shall be used for the application of the test voltages. The test voltages shall be coupled to all of the equipment under test ports in turn including those between two units of equipment involved in the test, unless the length of the interconnecting cable makes it impossible to test.


#### 5.5.4 Deviation from Standard

No deviation






## 5.5.5 Test Configuration

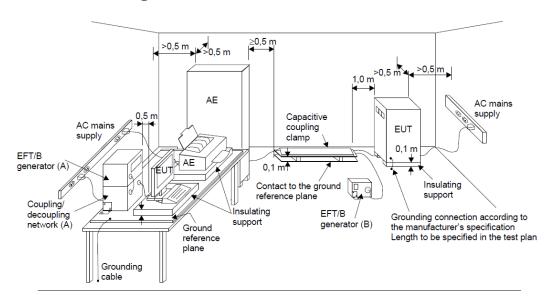

- (A) location for supply line coupling
- (B) location for signal lines coupling

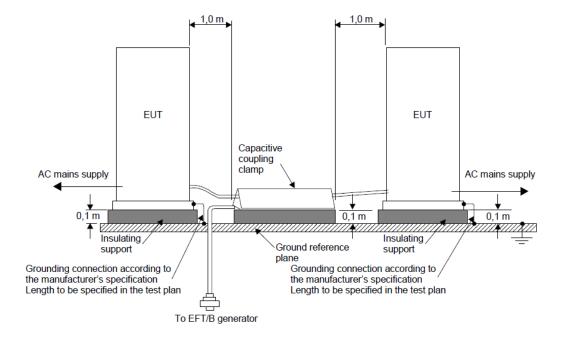





## 5.5.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 23°C, 49% RH |
|--------------|--------------|--------------------------|--------------|
| Tested by    | Tim Chao     | Test Date                | 2025/05/12   |

| Test Point              |            | Test Level<br>(kV) | Polarity<br>(+/-) | Result |
|-------------------------|------------|--------------------|-------------------|--------|
|                         | L          | 1                  | +/-               | A      |
|                         | N          | 1                  | +/-               | A      |
|                         | PE         | 1                  | +/-               | A      |
| AC Power Port           | L + N      | 1                  | +/-               | A      |
|                         | L + PE     | 1                  | +/-               | A      |
|                         | N + PE     | 1                  | +/-               | A      |
|                         | L + N + PE | 1                  | +/-               | A      |
| Signal Ports            | LAN_1G     | 0.5                | +/-               | A      |
| Telecommunication Ports | LAN_2.5G   | 0.5                | +/-               | A      |

**Note:** 

Criteria A: The EUT function was correct during the test.







## **5.5.7** Photographs of Test Configuration

Power



LAN (1G)








LAN (2.5G)









### **5.6 Surge Immunity Test**

### **5.6.1 Test Specification**

| Standard              | IEC/EN 61000-4-5  |  |
|-----------------------|---|--|
|                       | AC Main Power Port:   |  |
|                       | 1.2/50 μs Open Circuit Voltage, 8/20 μs Short Circuit Current                           |  |
|                       | DC Network Power Port (Note 1):   |  |
|                       | 1.2/50 μs Open Circuit Voltage, 8/20 μs Short Circuit Current                           |  |
| Wave- Shape           | Analogue/Digital Data Ports (unshielded symmetrical) (Direct to                         |  |
| wave- Shape           | outdoor cables <sup>(Note 2, 3)</sup> ):  |  |
|                       | 10/700 μs Open Circuit Voltage, 5/320 μs Short Circuit Current                          |  |
|                       | Analogue/Digital Data Ports (coaxial or shielded) (Direct to outdoor                    |  |
|                       | cables <sup>(Note 2, 3)</sup> ):  |  |
|                       | 1.2/50 μs Open Circuit Voltage, 8/20 μs Short Circuit Current                           |  |
|                       | AC Main Power Port - Line to Line: ±1 kV, Line to Ground: ±2 kV                         |  |
|                       | DC Network Power Port (cable length $> 3m$ ) - Line to Ground: $\pm 0.5 \text{ kV}$     |  |
| Tost Voltago          | Analogue/Digital Data Port (unshielded symmetrical): Line to Ground                     |  |
| Test Voltage          | Apply where primary protection is intended: ±1 kV and ±4 kV                             |  |
|                       | Apply where primary protection is not intended: ±1 kV                                   |  |
|                       | Analogue/Digital Data Ports (coaxial or shielded) - Shielded to Ground: $\pm 0.5 \; kV$ |  |
| Polarity              | Positive/Negative   |  |
| Phase Angle           | 0°/90°/180°/270° (For AC Main Power Port)   |  |
| Pulse Repetition Rate | 1 time / min. (maximum)   |  |
| Times                 | 5 Positive and 5 Negative at selected points  |  |

**Note:** 1. Applicable only to port which, according to the manufacturer's specification, support cabled lengths greater than 3 m.

- 2 Surges are applied with primary protection fitted. Where possible, use the actual primary protector intended to be use in the installation. Where the surge coupling network for the 10/700 (5/320)  $\mu$ s wave affects the functioning of high speed data ports, the test shall be carried out using 1.2/50 (8/20)  $\mu$ s wave and appropriate coupling network.
- 3. Surges are applicable to ports which satisfy all the following conditions: May connect directly to cables that leave the building structure. Defined as an antenna port, a wired network, or a broadcast receiver tuner port. Typical port covered include xDSL, PSTN, CATV, antenna and similar. Exclude ports are LAN and similar.





#### 5.6.2 Test Instrument

| Item | Equipment       | Manufacturer | Model       | Meter No.   | Calibration<br>Date |
|------|-----------------|--------------|-------------|-------------|---------------------|
| 1    | Surge Generator | 3ctest       | SG5020H     | CT-1-119    | Aug. 13, 2024       |
| 2    | CDN             | 3ctest       | SGN2232S20  | CT-1-120    | Aug. 13, 2024       |
| 3    | Surge CDN       | 3ctest       | CDN-405T8A1 | CT-1-074(5) | May 15, 2025        |

**Note:** 1. The calibration interval of the above test instruments is 12 months.

#### **5.6.3** Test Procedure

The test procedure was in accordance with IEC 61000-4-5.

- a. The table-top equipment under test was placed on a table that is 0.8 meter height. A ground reference plane is placed on the table, and uses 0.1m insulation between the equipment under test and ground reference plane.
- b. If not otherwise specified the power cord between the EUT and the coupling network shall not exceed 2 m in length.

For input power ports:

The table-top equipment under test was connected to the power ports through a coupling device that directly couples the surge interference signal. The surge noise shall be applied synchronized to the peak value of the voltage wave (Positive and negative). Each of Line to Earth and Line to Line is impressed with a sequence of five surge voltages with interval of 1 minute.

For signal / data ports:

The table-top equipment under test was connected to the signal ports of associated equipment through a Coupling / De-coupling Network (CDN). The surge noise shall be applied synchronized to the peak value of the voltage wave (Positive and negative). Each of Line to Earth is impressed with a sequence of five surge voltages with interval of 1 minute.

For shielded lines:

The table-top equipment under test is isolated from ground and the surge is applied to its metallic enclosure; the termination (or auxiliary equipment) at the port under test is grounded. The length of the cable between the port under test and the device attached to the other end of the cable shall be 20 m (preferred length) or, the shortest length over 10 m, where the manufacturer provides pre-assembled cables used in actual installations. For EUTs which do not have metallic enclosures, the surge is applied directly to the shielded cable at the EUT side.

No test shall be required for cables which according to the manufacturer's specification are  $\leq 10$  m.






### 5.6.4 Deviation from Standard


No deviation

## 5.6.5 Test Configuration

< Table-Top equipment under test >

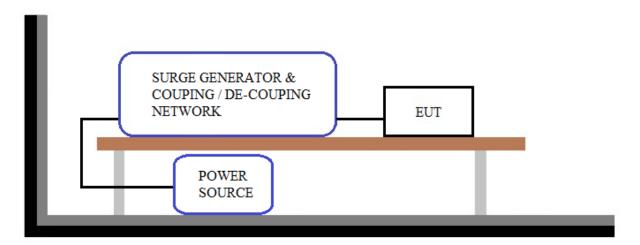

< Floor-Standing equipment under test >

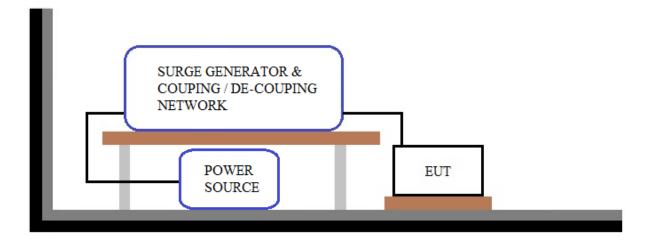






## 5.6.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 20°C, 51% RH |
|--------------|--------------|--------------------------|--------------|
| Tested by    | Dennis Chen  | Test Date                | 2025/05/27   |
| Test Site    | W05          |                          |              |

| AC Power Port |       |          |                   |   |   |          |
|---------------|-------|----------|-------------------|---|---|----------|
| T4 D-3-4      | Phase | Polarity | Test Voltage (kV) |   |   | D14      |
| Test Point    | Phase | (+/-)    | 0.5               | 1 | 2 | Result   |
|               | 0°    | +/-      | A                 | A | - |          |
| L to N        | 90°   | +/-      | A                 | A | - | A        |
| LION          | 180°  | +/-      | A                 | A | - | A        |
|               | 270°  | +/-      | A                 | A | - |          |
|               | 0°    | +/-      | A                 | A | A |          |
| L to PE       | 90°   | +/-      | A                 | A | A | A        |
| LWFE          | 180°  | +/-      | A                 | A | A | A        |
|               | 270°  | +/-      | A                 | A | A |          |
|               | 0°    | +/-      | A                 | A | A |          |
| N to PE       | 90°   | +/-      | A                 | A | A | <b>A</b> |
|               | 180°  | +/-      | A                 | A | A | A        |
|               | 270°  | +/-      | A                 | A | A |          |

Note:


Criteria A: The EUT function was correct during the test.








## **5.6.7 Photographs of Test Configuration**

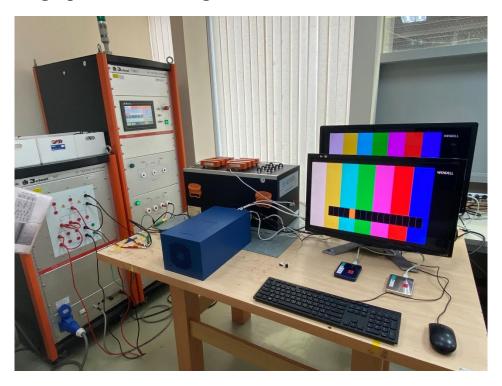







## **5.7 Conducted Disturbances Immunity Test**


## **5.7.1 Test Specification**

| Standard        | IEC/EN 61000-4-6   |
|-----------------|--|
| Frequency Range | $0.15 \sim 10 \text{ MHz}, 10 \sim 30 \text{ MHz}, 30 \sim 80 \text{ MHz}$ |
| Voltage Level   | 3 V, 3 - 1 V, 1 V  |
| Modulation      | 80% AM Modulation with 1 kHz Sine Wave                                     |
| Frequency Step  | 1%   |
| Dwell Time      | 3 seconds  |

## **5.7.2** Test Instrument

| Item | Equipment                                | Manufacturer       | Model                    | Meter No.    | Calibration<br>Date    |
|------|--|--------------------|--------------------------|--------------|------------------------|
| 1    | Coupling clamp according to IEC 6100-4-6 | FRANKONIA          | EMCL-20                  | CT-1-049     | May 30, 2024           |
| 2    | CDN for power supply lines               | FRANKONIA          | CDN M2+M3                | CT-1-054     | May 30, 2024           |
| 3    | 6 dB Attenuator                          | BIRD               | 75-A-FFN-06              | CT-1-056     | May 30, 2024           |
| 4    | Compact Immunity Test System acc         | FRANKONIA          | CIT-10/75                | CT-1-057     | May 30, 2024           |
| 5    | CDN for screened lines                   | FRANKONIA          | RJ45S                    | CT-1-052 (1) | May 30, 2024           |
| 6    | 50ohm<br>Termination                     | N/A                | N/A                      | CT-1-065-2   | Apr. 26, 2025          |
| 7    | CDN Four<br>Balanced<br>Pairs-unscreened | Com-Power          | CDN-T8E                  | CT-1-130     | May 30, 2024           |
| 8    | Measurement<br>Software                  | HUBERT             | Ver: 1.1.2               | N/A          | No calibration request |
| 9    | Conditioning Amplifier / Microphone      | B & K              | 2690-OS2 /<br>4192-L-001 | CT-1-157     | May 29, 2024           |
| 10   | Sound Level<br>Calibrator                | B & K              | 4231                     | CT-1-156     | May 29, 2024           |
| 11   | Sound Analyer                            | VGT                | ABT CB0                  | CT-1-159     | May 28, 2024           |
| 12   | Frequency<br>Counter                     | HEWLETT<br>PACKARD | 53181A                   | CT-1-158     | May 25, 2024           |
| 13   | Audio output<br>Measurement<br>Software  | VGT                | V1.2-WD                  | N/A          | No calibration request |

**Note:** 1. The calibration interval of the above test instruments is 12 months.







#### **5.7.3** Test Procedure

The test procedure was in accordance with IEC 61000-4-6.

- a. The table-top equipment under test was placed on an insulating support of 0.1 m height above a reference ground plane. If the equipment is designed to be mounted in a panel, rack or cabinet, then it shall be tested in this configuration. Grounding of the equipment shall be consistent with the EUT's installation instructions. The Coupling/De-coupling Network (CDN) shall be located between 0.1 m and 0.3 m from the equipment under test.
- b. The frequency range shall be swept, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal is modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. Where the frequency is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.

For input power ports:

The table-top equipment under test was connected to the power ports through a Coupling/De-coupling Network (CDN) for power supply lines. And directly couples the disturbances signal into equipment under test.

For signal / data ports:

The table-top equipment under test was connected to the signal ports of associated equipment through a Coupling/De-coupling Network (CDN). And directly couples the disturbances signal into equipment under test.


#### 5.7.4 Deviation from Standard

No deviation





## 5.7.5 Test Configuration

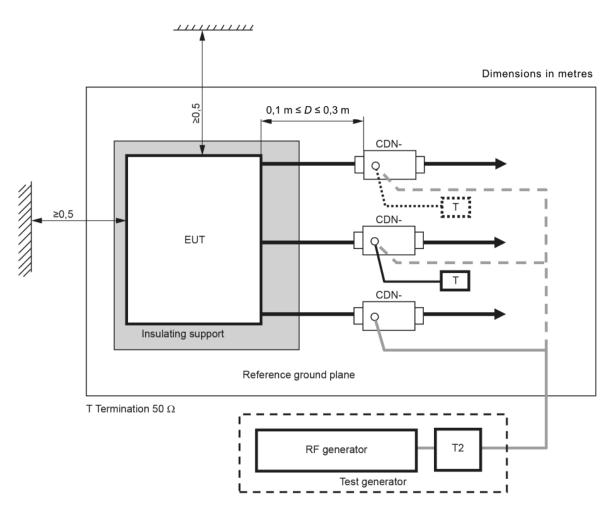

#### **Note:**

- 1. The EUT clearance from any metallic objects other than test equipment shall be at least  $0.5\ m.$
- 2. Only one of the CDNs not used for injection shall be terminated with 50  $\Omega$ , providing only a single return path. All other CDNs shall be configured as decoupling networks.





### 5.7.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 22°C, 50% RH |
|--------------|--------------|--------------------------|--------------|
| Tested by    | Guanwei Liao | Test Date                | 2025/05/19   |

| Frequency Range (MHz) | Tested Port | Injection<br>Method   | Test Level (V <sub>r.m.s.</sub> ) | Modulation      | Result |
|-----------------------|-------------|-----------------------|-----------------------------------|-----------------|--------|
| 0.15 ~ 10             | AC Power    | CDN-M2<br>+M3<br>(M3) | 3                                 | 80% AM,<br>1kHz | A      |
| 10 ~ 30               | AC Power    | CDN-M2<br>+M3<br>(M3) | 3 - 1                             | 80% AM,<br>1kHz | A      |
| 30 ~ 80               | AC Power    | CDN-M2<br>+M3<br>(M3) | 1                                 | 80% AM,<br>1kHz | A      |
| 0.15 ~ 10             | LAN_1G      | CLAMP                 | 3                                 | 80% AM,<br>1kHz | A      |
| 10 ~ 30               | LAN_1G      | CLAMP                 | 3 - 1                             | 80% AM,<br>1kHz | A      |
| 30 ~ 80               | LAN_1G      | CLAMP                 | 1                                 | 80% AM,<br>1kHz | A      |
| 0.15 ~ 10             | LAN_2.5G    | CLAMP                 | 3                                 | 80% AM,<br>1kHz | A      |
| 10 ~ 30               | LAN_2.5G    | CLAMP                 | 3 - 1                             | 80% AM,<br>1kHz | A      |
| 30 ~ 80               | LAN_2.5G    | CLAMP                 | 1                                 | 80% AM,<br>1kHz | A      |

#### Note:


Criteria A: The EUT function was correct during the test.

Not supporting telephony audio output function acoustic/electrical measurements

| Frequency Range (MHz) | Tested Port | Injection<br>Method   | Test Level (V <sub>r.m.s.</sub> ) | Modulation      | Result |
|-----------------------|-------------|-----------------------|-----------------------------------|-----------------|--------|
| 0.15 ~ 10             | AC Power    | CDN-M2<br>+M3<br>(M3) | 3                                 | 80% AM,<br>1kHz | A      |
| 10 ~ 30               | AC Power    | CDN-M2<br>+M3<br>(M3) | 3 - 1                             | 80% AM,<br>1kHz | A      |
| 30 ~ 80               | AC Power    | CDN-M2<br>+M3<br>(M3) | 1                                 | 80% AM,<br>1kHz | A      |

#### Note:

Criteria A: The audio output performance evaluation criteria were satisfied. The interference ratio is -20 dB or better.









## **5.7.7 Photographs of Test Configuration**

Power

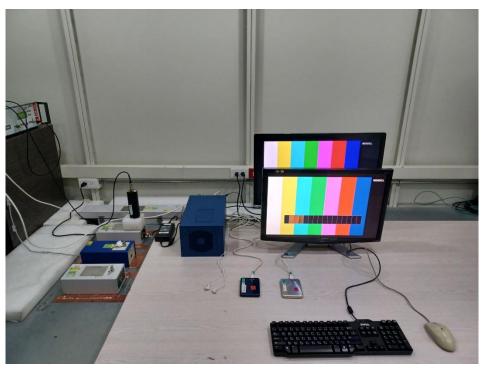

LAN (1G)

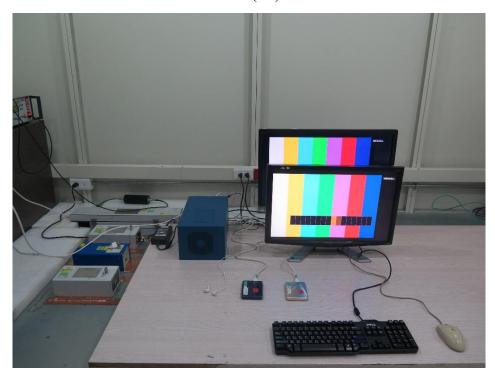





## LAN (2.5G)







### 5.8 Power Frequency Magnetic Field Immunity Test

### **5.8.1 Test Specification**

| Standard                | IEC/EN 61000-4-8        |
|-------------------------|-------------------------|
| Frequency Range         | 50/60Hz                 |
| Field Strength          | 1 A/m                   |
| <b>Observation Time</b> | 1 minute                |
| Inductance Coil         | Rectangular type, 1mx1m |

**Note:** 1. Applicable only to equipment containing devices intrinsically susceptible to magnetic field, such as CRT monitors, Hall effect elements, electron-dynamic microphones, magnetic field sensors or audio frequency transformers.

#### 5.8.2 Test Instrument

| Item | Equipment | Manufacturer | Model    | Meter No. | Calibration<br>Date |
|------|-----------|--------------|----------|-----------|---------------------|
| 1    | PFMF      | SGH          | HMFG1000 | CT-1-164  | Sep. 28, 2023       |

**Note:** 1. The calibration interval of the above test instruments is 24 months.

#### 5.8.3 Test Procedure

The test procedure was in accordance with IEC 61000-4-8.

- a. The table-top equipment under test was placed on a table which is 0.8 meter above a metal ground plane measured at least 1m × 1m minimum. The test magnetic field shall be placed at central of the induction coil. The floor-standing equipment under test was placed on 0.1m insulation support unit between the EUT and ground reference plane.
- b. The test magnetic Field shall be applied 10 minutes by the immersion method to the table-top equipment under test, and the induction coil shall be rotated by 90° in order to expose the equipment under test to the test field with different orientation (X, Y, Z Orientations). The test magnetic Field shall be applied 10 minutes by the proximity method to the floor-standing equipment under test, and the induction coil shall be rotated by 90° in order to expose the equipment under test to the test field with different orientation (X, Y, Z Orientations).


#### 5.8.4 Deviation from Standard


No deviation





### 5.8.5 Test Configuration

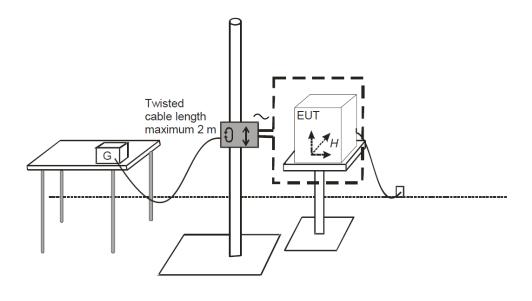

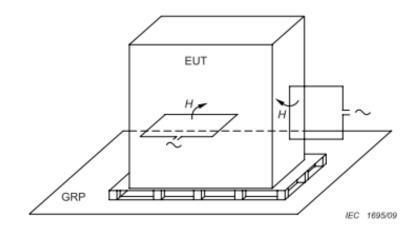

For the actual test configuration, please refer to 5.8.7.

#### **NOTE:**

#### TABLETOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

#### FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.






## 5.8.6 Test Result

| Test Voltage | 230Vac, 50Hz | Environmental Conditions | 21°C, 49% RH |
|--------------|--------------|--------------------------|--------------|
| Tested by    | Guanwei Liao | Test Date                | 2025/05/20   |

| Test Coil Position | Frequency (Hz) | Magnetic Strength (A/m) | Result |
|--------------------|----------------|-------------------------|--------|
| X - Axis           | 50/60          | 1                       | A      |
| Y - Axis           | 50/60          | 1                       | A      |
| Z - Axis           | 50/60          | 1                       | A      |

Note:


Criteria A: The EUT function was correct during the test.







## **5.8.7 Photographs of Test Configuration**

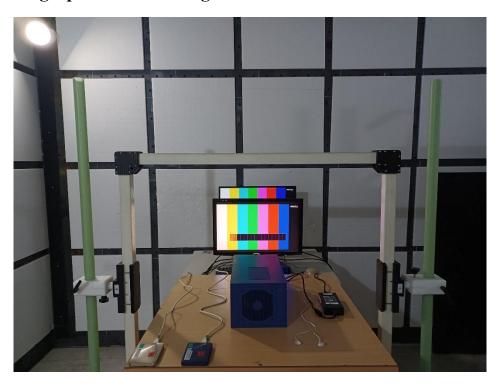





### 5.9 Voltage Dips & Short Interruptions Immunity Test

## 5.9.1 Test Specification


| Basic Standard            | IEC/EN 61000-4-11  |
|---------------------------|--|
| Test Level                | Voltage Dips:  >95% reduction, 0.5 cycle  30% reduction, 25 cycle  Voltage Interruptions:  >95% reduction, 250 cycle |
| <b>Test Duration Time</b> | Minimum 3 test events in sequence  |
| Interval between Event    | Minimum 10 seconds   |
| Phase Angle               | 0° / 180°  |
| Test Cycle                | 3 times  |


**Note:** 1. Changes to occur at 0 degree crossover point of the voltage waveform. If the EUT does not demonstrate compliance when tested with 0 degree switching, the test shall be repeated with the switching occurring at both 90 degrees and 270 degrees. If the EUT satisfies these alternative requirements, then it fulfils the requirements. This condition shall be recorded in the test report.

#### **5.9.2 Test Instrument**

| Item | Equipment     | Manufacturer | Model    | Meter No. | Calibration<br>Date |
|------|---------------|--------------|----------|-----------|---------------------|
| 1    | DIP Simulator | 3ctest       | PFS2216S | CT-1-167  | Sep. 27, 2024       |

**Note:** 1. The calibration interval of the above test instruments is 12 months.








#### **5.9.3 Test Procedure**

The test procedure was in accordance with IEC 61000-4-11.

- a. The test shall be performed with the equipment under test connected to the test generator with the shortest power supply cable as specified by the equipment under test manufacturer. If no cable length is specified, it shall be the shortest possible length suitable to the application of the equipment under test. For equipment under test with more than one power cord, each power cord should be tested individually.
- b. The equipment under test shall be tested for each selected combination of test levels and duration with a sequence of 3 dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at 0 voltage crossover point of the voltage waveform.
- c. For each test, any degradation of performance shall be recorded. The monitoring equipment should be capable of displaying the status of the operational mode of the equipment under test during and after the tests. After each group of tests, a full functional check shall be performed.

#### 5.9.4 Deviation from Standard

No deviation










# **5.9.5 Test Configuration**

< Table-Top equipment under test >

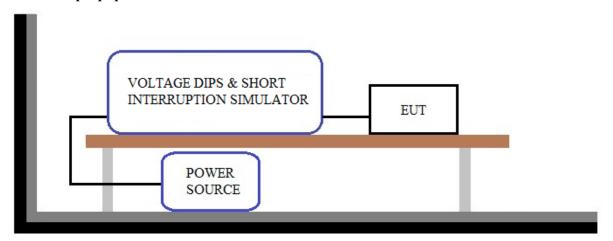

### < Floor-Standing equipment under test >

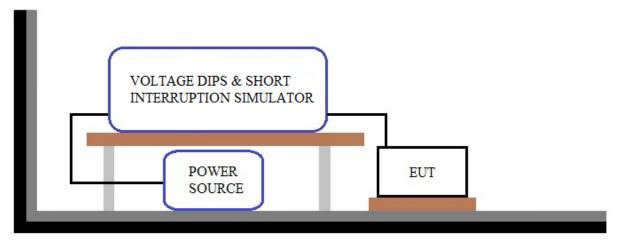







## 5.9.6 Test Result

| Test Voltage | 100-240Vac, 50Hz | Environmental Conditions | 21°C, 49% RH |
|--------------|------------------|--------------------------|--------------|
| Tested by    | Guanwei Liao     | Test Date                | 2025/05/20   |

| 230Vac, 50Hz          |             |                      |        |  |  |
|-----------------------|-------------|----------------------|--------|--|--|
| Test Item             | % Reduction | Duration<br>(Period) | Result |  |  |
| W.L. D.               | >95         | 0.5                  | A      |  |  |
| Voltage Dips          | 30          | 25                   | A      |  |  |
| Voltage interruptions | >95         | 250                  | C (#1) |  |  |


| 240Vac, 50Hz          |             |                      |        |  |
|-----------------------|-------------|----------------------|--------|--|
| Test Item             | % Reduction | Duration<br>(Period) | Result |  |
| Voltage Dips          | >95         | 0.5                  | A      |  |
|                       | 30          | 25                   | A      |  |
| Voltage interruptions | >95         | 250                  | C (#1) |  |

| 100Vac, 50Hz          |             |                      |        |  |
|-----------------------|-------------|----------------------|--------|--|
| Test Item             | % Reduction | Duration<br>(Period) | Result |  |
| Voltage Dips          | >95         | 0.5                  | A      |  |
|                       | 30          | 25                   | A      |  |
| Voltage interruptions | >95         | 250                  | C (#1) |  |

#### **Note:**

Criteria A: The EUT function was correct during the test.

Criteria C: (#1) The EUT was shut down during the test, and must be recovered manually.







## **5.9.7 Photographs of Test Configuration**



< End Page >